


7

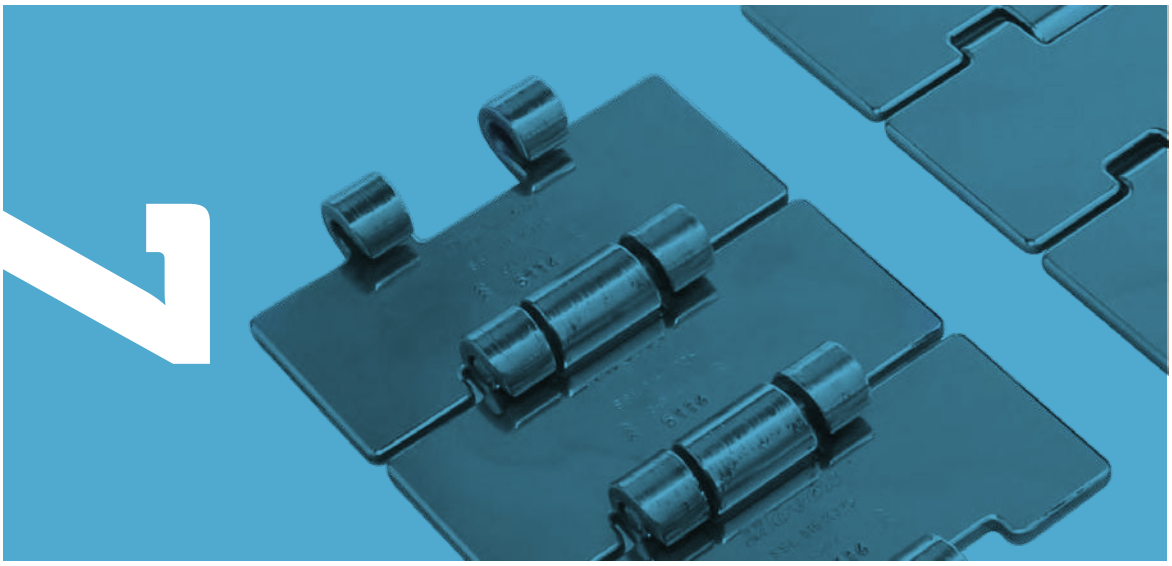

Steel chains

812/815

Pag 8/9

802/805

Pag 10

8157

Pag 10

512


Pag 11

881 M

Pag 12/13


881 TAB


Pag 14

881 B

Pag 15

8811 TAB


Pag 16


8811 B

Pag 17


8857 M

Pag 18


815 MINI

Pag 19

812 GT/815 GT

Pag 20


815 TAB GT

Pag 21

802 GT/805 GT

Pag 22

8157 GT

Pag 23

8811 TAB GT

Pag 24

881 M GT

Pag 25

8857 M GT

Pag 26


1874 TAB

Pag 27

815 Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: Easy | Standard — **Pins:** Martensitic 1.4057 | **Backflex radius min.:** 150 mm




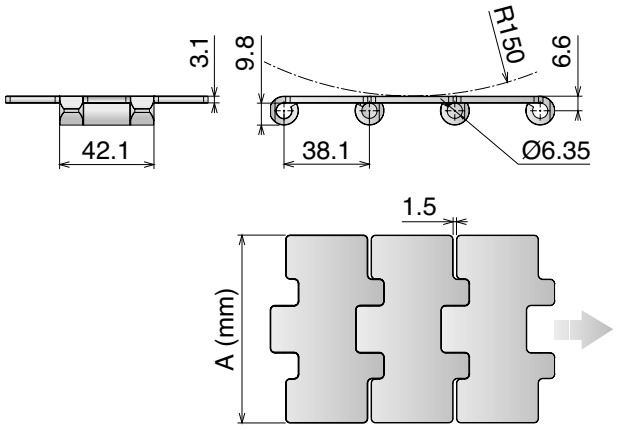

10 feet 3.048 m — 80 links | 82-83-97/108 | pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Surface Flatness mm	Polished Hinge eyes	Max working load (N)	Plate Thickness mm
SSM Max Speed - Hardened pins								
10010302	SSM 815 K325	82,5	2,55	0,2	0,08	YES	6000	3,1
10010303	SSM 815 K330	83,8	2,59	0,2	0,08	YES		

Max Speed High Performance

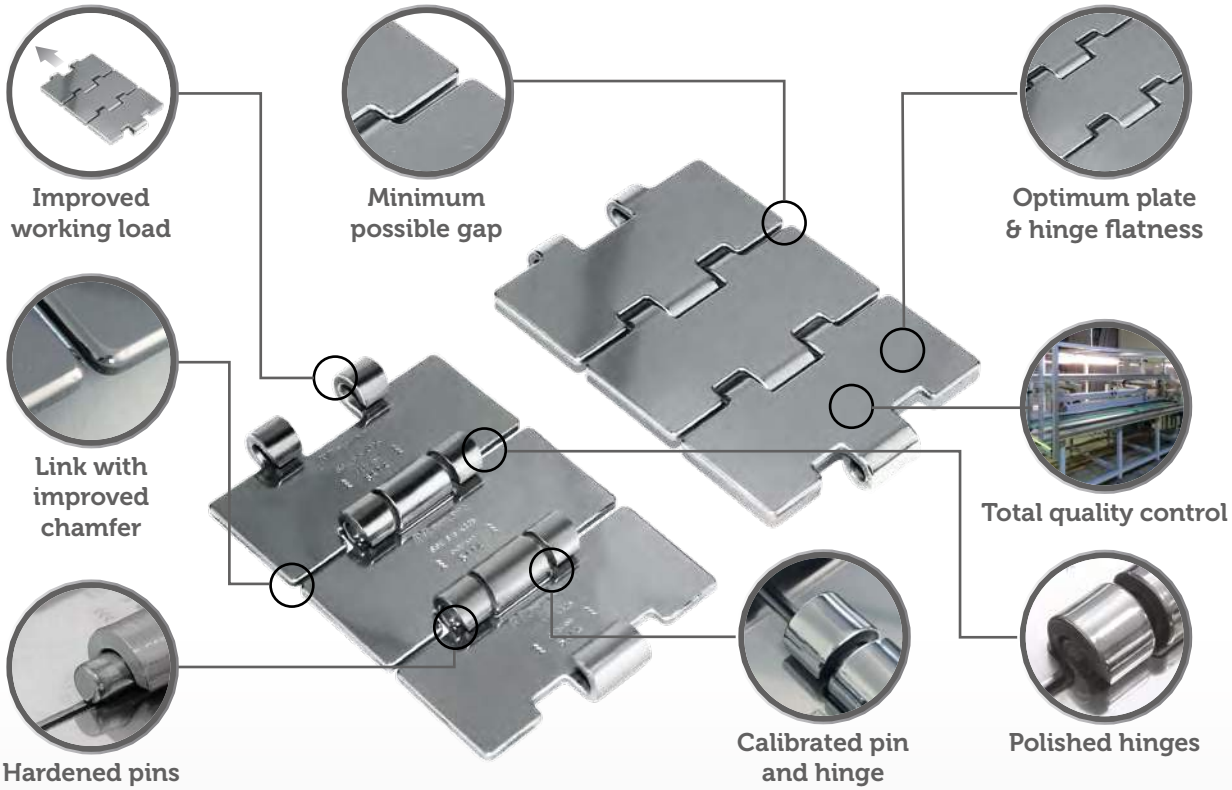


812/815

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: Easy | Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 150 mm



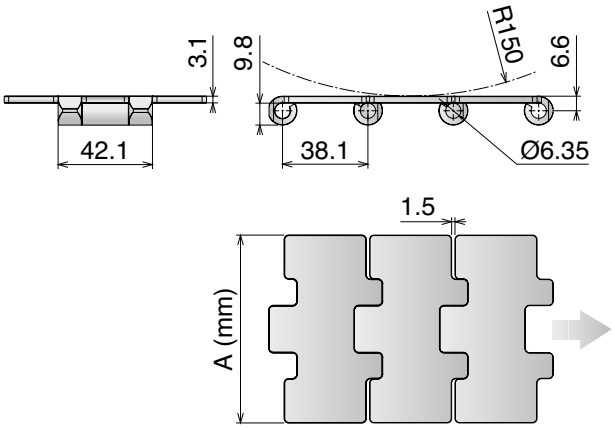


10 feet 3.048 m | 80 links | 82-83-97/108 | pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Surface Flatness mm	Polished Hinge eyes	Max working load (N)	Plate Thickness mm
			SS *Ferritic Stainless Steel (1.4016)*					
10010216	SS 812 K300	76,2	2,50	0,5	0,15	NO	5400	3,1
10010202	SS 812 K325	82,5	2,55	0,5	0,15	NO		
10010203	SS 812 K330	83,8	2,59	0,5	0,15	NO		
10010204	SS 812 K350	88,9	2,69	0,5	0,15	NO		
10010214	SS 812 K400	101,6	3,00	0,5	0,15	NO		
10010205	SS 812 K450	114,3	3,25	0,5	0,20	NO		
10010206	SS 812 K600	152,4	4,15	0,5	0,30	NO		
10010207	SS 812 K750	190,5	5,05	0,5	0,30	NO		
			SSE *Specially treated Ferritic Stainless Steel (1.4589)* - **Hardened pins**					
10010102	SSE 815 K325	82,5	2,55	0,3	0,10	YES	6000	3,1
10010103	SSE 815 K330	83,8	2,59	0,3	0,10	YES		
10010104	SSE 815 K350	88,9	2,69	0,3	0,15	NO		
10010114	SSE 815 K400	101,6	3,00	0,3	0,15	NO		
10010105	SSE 815 K450	114,3	3,25	0,3	0,20	NO		
10010106	SSE 815 K600	152,4	4,15	0,3	0,30	NO		
10010107	SSE 815 K750	190,5	5,05	0,3	0,30	NO		
			SSA *Austenitic Stainless Steel (AISI 304) - Austenitic pin*					
10010402	SSA 815 K325	82,5	2,55	0,5	0,15	NO	5300	3,1
10010403	SSA 815 K330	83,8	2,59	0,5	0,15	NO		
10010404	SSA 815 K350	88,9	2,69	0,5	0,15	NO		
10010405	SSA 815 K450	114,3	3,25	0,5	0,20	NO		
10010406	SSA 815 K600	152,4	4,15	0,5	0,30	NO		
10010407	SSA 815 K750	190,5	5,05	0,5	0,30	NO		

802/805

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: Easy | Standard — **Pins:** Martensitic 1.4057 | **Backflex radius min.:** 150 mm

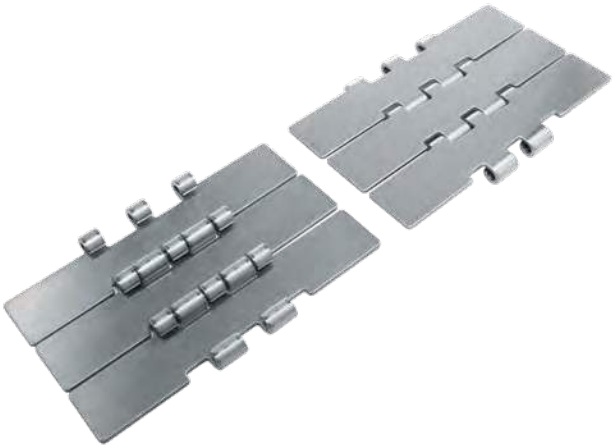

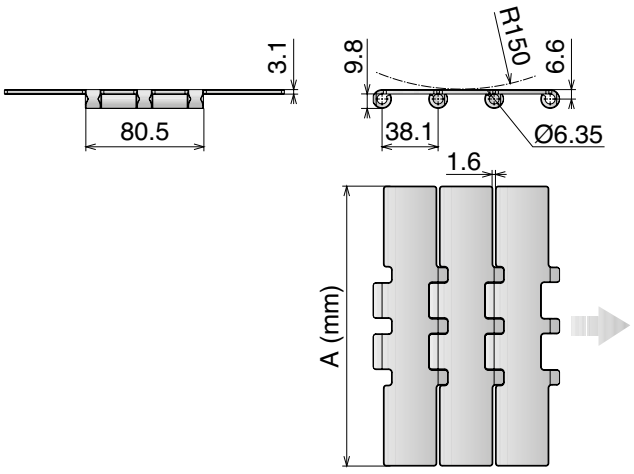

10 feet 3.048 m | 80 links | pg. 86-98-109 | pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
		SS *Ferritic Stainless Steel (1.4016)*				
10030207	SS 802 K750	190,5	5,80	0,6	7000	3,1
		SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**				
10030107	SSE 805 K750	190,5	5,80	0,3	9000	3,1
		SSA *Austenitic Stainless Steel (AISI 304) - Austenitic pin*				
10030407	SSA 805 K750	190,5	5,80	0,6	8700	3,1

8157

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: Easy | Standard — **Pins:** Martensitic 1.4057 | **Backflex radius min.:** 130 mm



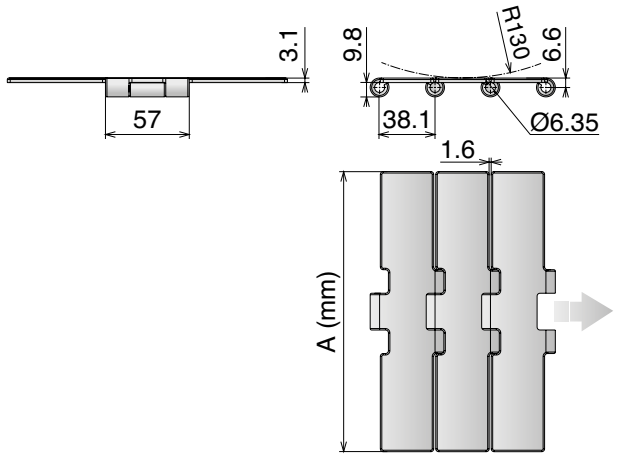


10 feet 3.048 m | 80 links | pg. 87-97-110 | pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thikness mm
		SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**				
10050107	SSE 8157 K750	190,5	5,60	0,3	7000	3,1


512 Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: Easy | Standard — **Pins:** Martensitic 1.4057 | **Backflex radius min.:** 80 mm









10 feet 3.048 m — 120 links | pg. 96-99 | pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
	SSE *Specially treated Ferritic Stainless Steel (1.4589)* - **Hardened pins**					
10070100	SSE 512 K217	55,1	2,30	0,3		
10070101	SSE 512 K236	59,9	2,40	0,3		
10070108	SSE 512 K250	63,5	2,45	0,3		
10070109	SSE 512 K283	71,9	2,65	0,3	5000	3,1
10070102	SSE 512 K325	82,5	2,90	0,3		
10070104	SSE 512 K350	88,9	3,00	0,3		
10070114	SSE 512 K400	101,6	3,30	0,3		
	SSA *Austenitic Stainless Steel (AISI 304) - Austenitic pin*					
10070400	SSA 512 K217	55,1	2,30	0,3		
10070401	SSA 512 K236	59,9	2,40	0,3		
10070408	SSA 512 K250	63,5	2,45	0,3	4500	3,1
10070409	SSA 512 K283	71,9	2,65	0,3		
10070414	SSA 512 K400	101,6	3,30	0,3		


881 M

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy | Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 80 mm



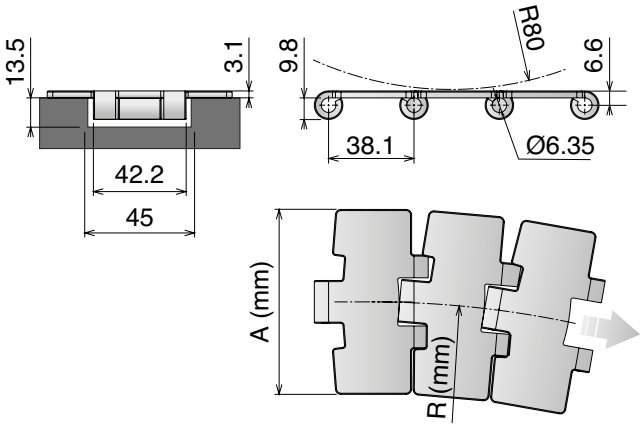


Magnetic System

10 feet 3.048 m | 80 links

pg. 84-85/110 | pg. 115->130 | pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Surface Flatness mm	Polished Hinge eyes	Max working load (N)	Plate Thickness mm
SSM Max Speed - Hardened pins									
10080302	SSM 881 M0 K325	82,5	500	2,55	0,2	0,08	YES	6000	3,1
10080303	SSM 881 M0 K330	83,8	500	2,59	0,2	0,08	YES		

Max Speed High Performance

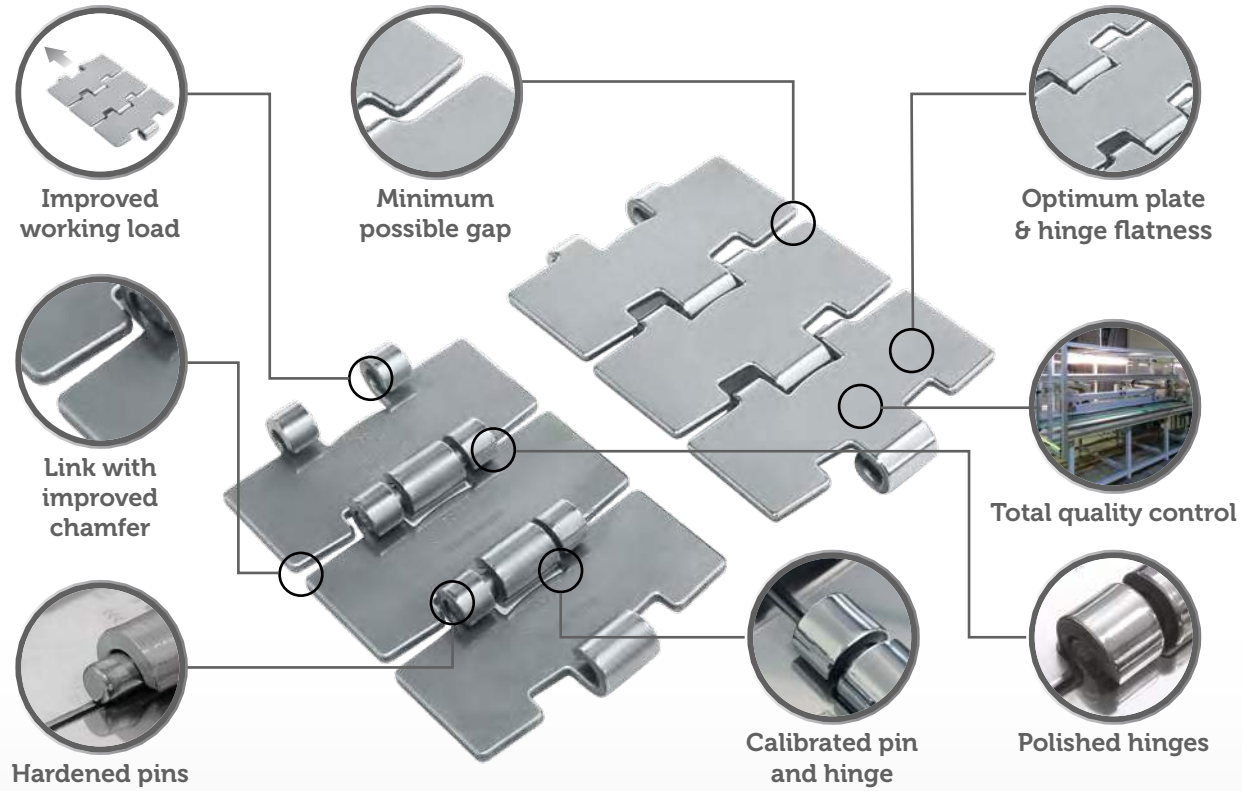


881 M

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy | Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 80 mm



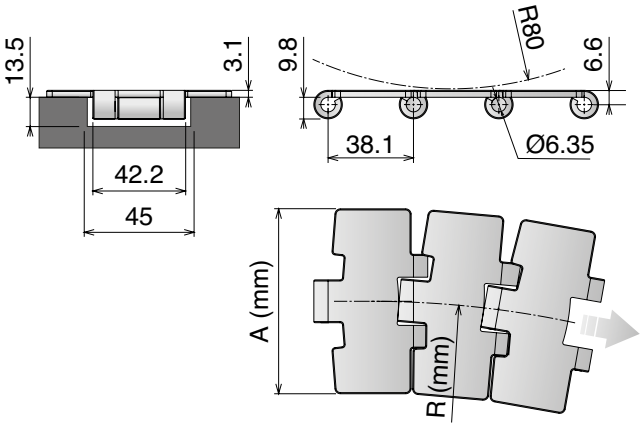

Magnetic System

10 feet 3.048 m
80 links

pg. 84-85/110
pg. 115->130
pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Surface Flatness mm	Polished Hinge eyes	Max working load (N)	Plate Thickness mm
				SS *Ferritic Stainless Steel (1.4016)*					
10080202	SS 881 M0 K325	82,5	500	2,55	0,5	0,15	YES	5400	3,1
10080203	SS 881 M0 K330	83,8	500	2,59	0,5	0,15	YES		
10080205	SS 881 M0 K450	114,3	500	3,10	0,5	0,20	YES		
10080207	SS 881 M0 K750	190,5	500	4,85	0,5	0,30	YES		
				SSE *Specially treated Ferritic Stainless Steel (1.4589)* - **Hardened pins**					
10080102	SSE 881 M0 K325	82,5	500	2,55	0,3	0,10	YES	6000	3,1
10080103	SSE 881 M0 K330	83,8	500	2,59	0,3	0,10	YES		
10080105	SSE 881 M0 K450	114,3	500	3,10	0,3	0,20	YES		
10080107	SSE 881 M0 K750	190,5	500	4,85	0,3	0,30	YES		


881 TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy | Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 80 mm



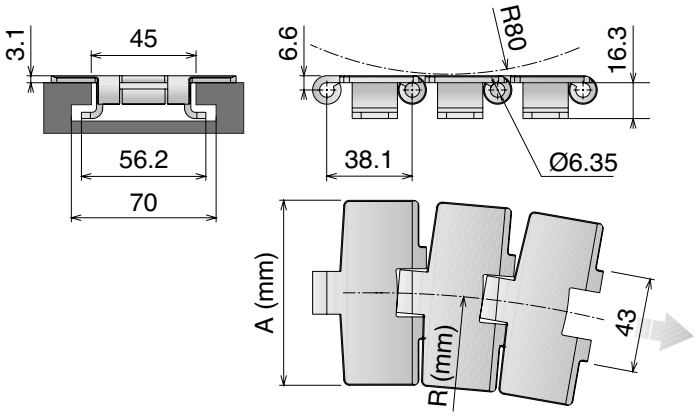

Tab System

10 feet 3.048 m | 80 links | pg. 84-85/110 | pg. 163/169 | pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
			SS *Ferritic Stainless Steel (1.4016)*				
10100202	SS 881 TAB K325	82,5	457	3,00	0,3	5400	3,1
			SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**				
10100102	SSE 881 TAB K325	82,5	457	3,00	0,3		
10100105	SSE 881 TAB K450	114,3	500	3,69	0,3	6000	3,1
10100107	SSE 881 TAB K750	190,5	500	5,50	0,3		
			SSA *Austenitic Stainless Steel (AISI 304) - Austenitic pin*				
10100402	SSA 881 TAB K325	82,5	457	3,00	0,3		
10100405	SSA 881 TAB K450	114,3	500	3,69	0,3	4500	3,1
10100407	SSA 881 TAB K750	190,5	500	5,50	0,3		

881 B

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Pins: Martensitic 1.4057 | **Backflex radius min.:** 60 mm



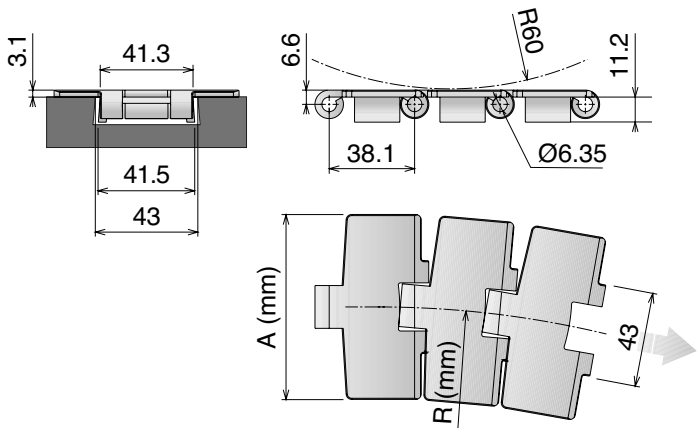

Bevel System

10 feet 3.048 m
80 links

pg. 84-85/110
pg. 168
pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
			SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**				
10120102	**SSE 881 K325**	82,5	457	2,95	0,3	6000	3,1
10120104	**SSE 881 K350**	88,9	500	3,00	0,3		
10120105	**SSE 881 K450**	114,3	500	3,65	0,3		
10120107	**SSE 881 K750**	190,5	500	5,45	0,3		
			SSA *Austenitic Stainless Steel (AISI 304) - Austenitic pin*				
10120402	**SSA 881 K325**	82,5	457	2,95	0,3	4500	3,1
10120405	**SSA 881 K450**	114,3	500	3,65	0,3		
10120407	**SSA 881 K750**	190,5	500	5,45	0,3		

8811 TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy | Standard — **Pins:** Martensitic 1.4057 | **Backflex radius min.:** 70 mm



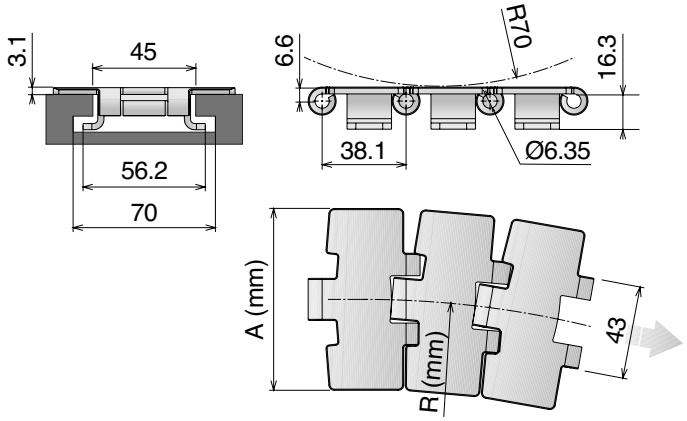

Tab System

10 feet 3.048 m — 80 links | pg. 84-85/110 | pg. 163/169 | pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
			SS *Ferritic Stainless Steel (1.4016)*				
10140202	SS 8811 TAB K325	82,5	500	2,95	0,3	5400	3,1
10140203	SS 8811 TAB K330	83,8	500	3,05	0,3		
10140205	SS 8811 TAB K450	114,3	610	3,65	0,3		
10140207	SS 8811 TAB K750	190,5	610	5,45	0,3		
			SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**				
10140102	SSE 8811 TAB K325	82,5	500	2,95	0,3	6000	3,1
10140103	SSE 8811 TAB K330	83,8	500	3,05	0,3		
10140104	SSE 8811 TAB K350	88,9	500	3,15	0,3		
10140105	SSE 8811 TAB K450	114,3	500	3,65	0,3		
10140107	SSE 8811 TAB K750	190,5	500	5,45	0,3		
			SSA *Austenitic Stainless Steel (AISI 304) - Austenitic pin*				
10140402	SSA 8811 TAB K325	82,5	500	2,95	0,3	4500	3,1
10140403	SSA 8811 TAB K330	83,8	500	3,05	0,3		
10140405	SSA 8811 TAB K450	114,3	500	3,65	0,3		
10140407	SSA 8811 TAB K750	190,5	500	5,45	0,3		


8811 B

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy | Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 80 mm



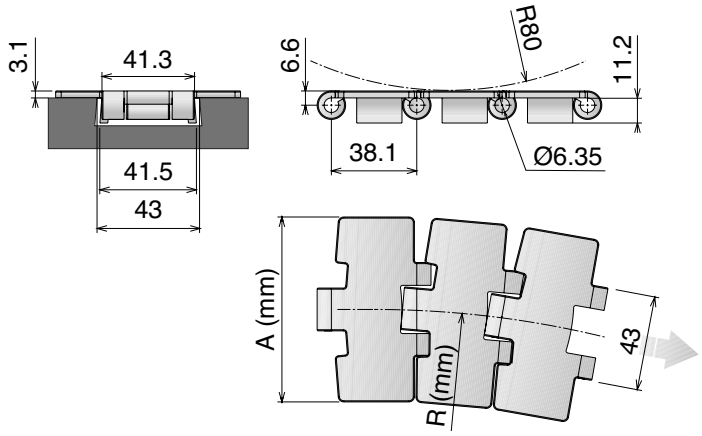

Bevel System

10 feet 3.048 m — 80 links | pg. 84-85/110 | pg. 168 | pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
			SSE *Specially treated Ferritic Stainless Steel (1.4589)* - **Hardened pins**				
10160102	SSE 8811 K325	82,5	500	2,90	0,3	6000	3,1
10160104	SSE 8811 K350	88,9	500	3,15	0,3		
10160105	SSE 8811 K450	114,3	500	3,60	0,3		
10160107	SSE 8811 K750	190,5	500	5,40	0,3		
			SSA *Austenitic Stainless Steel (AISI 304) - Austenitic pin*				
10160402	SSA 8811 K325	82,5	500	2,90	0,3	4500	3,1
10160404	SSA 8811 K350	88,9	500	3,15	0,3		
10160405	SSA 8811 K450	114,3	500	3,60	0,3		
10160407	SSA 8811 K750	190,5	500	5,40	0,3		


8857 M

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy | Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 80 mm

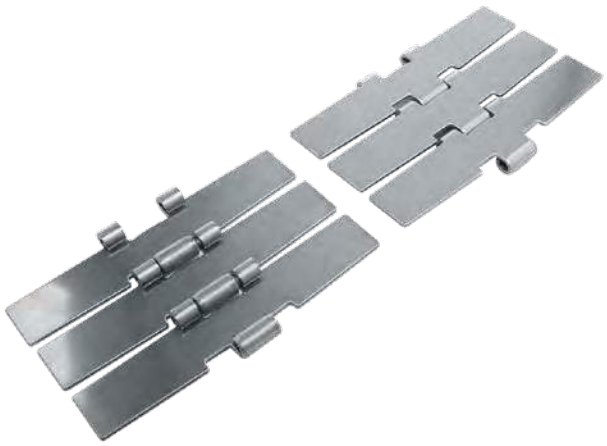

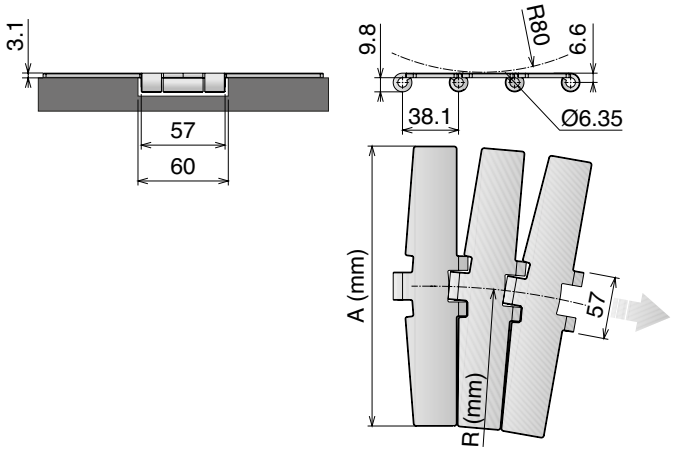

Magnetic System

10 feet 3.048 m
80 links

pg. 87-97/110
pg. 131->136
pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**							
10180107	**SSE 8857 M K750**	190,5	750	5,30	0,3	7000	3,1

815 MINI

Catena rettilinea
Straight running chain / Geradegängige Schanierbandkette

Pins: Martensitic 1.4057 | **Backflex radius min.:** 75 mm



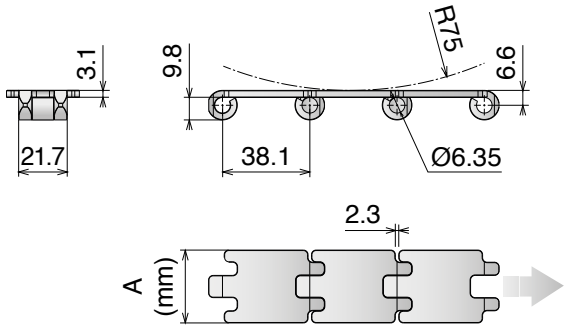

10 feet
3.048 m
80 links

pg. 100

pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate Thickness mm
	SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**				
10210117	**SSE 815 K125**	31,75	1,07	3000	3,1
10210118	**SSE 815 K175**	44,45	1,35		


812 GT/815 GT

Catena rettilinea
Straight running chain / Geradegängige Schanierbandkette

Delivery: Easy | Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 120 mm

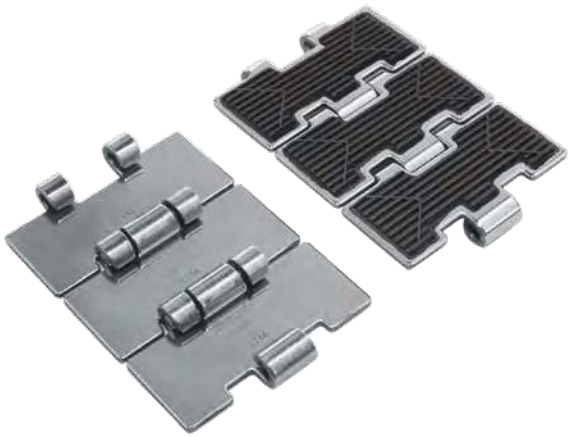

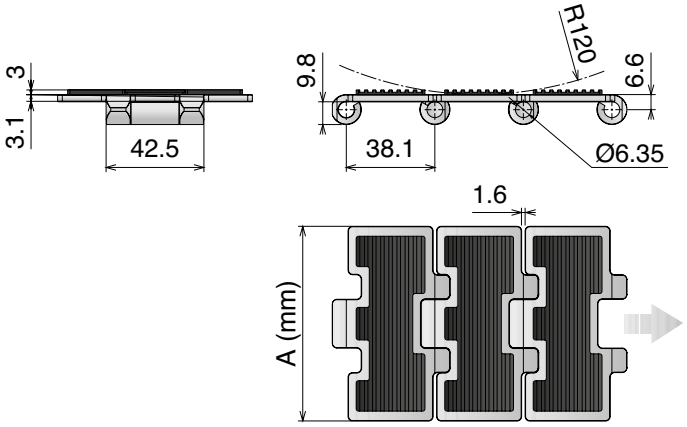

10 feet
3.048 m
80 links

82-83-97/108

pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
		SS *Ferritic Stainless Steel (1.4016)*			
10020202	**SS 812 GT K325**	82,5	2,80	5400	Plate 3,1 Rubber 3
		SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**			
10020102	**SSE 815 GT K325**	82,5	2,80	6000	Plate 3,1 Rubber 3
10020105	**SSE 815 GT K450**	114,3	3,55		
10020107	**SSE 815 GT K750**	190,5	5,55		


815 TAB GT

Catena rettilinea
Straight running chain / Geradegängige Schanierbandkette

Delivery: Easy | Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 120 mm



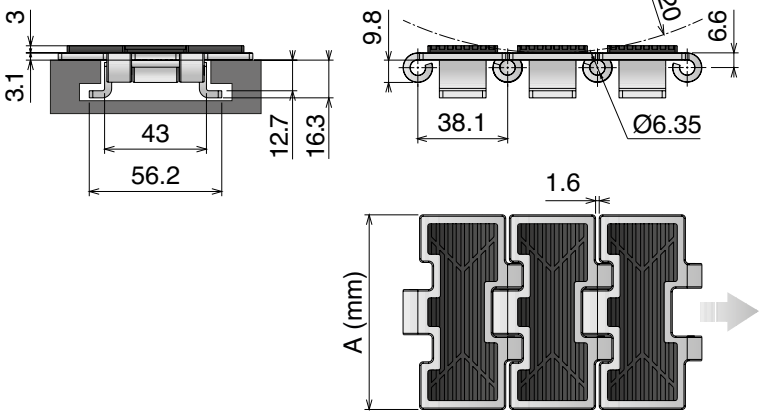

Tab System

10 feet 3.048 m | 80 links | 82-83-97/108 | pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
SSE *Specially treated Ferritic Stainless Steel (1.4589)* - **Hardened pins**					
10200102	SSE 815 TAB GT K325	82,5	3,40	6000	Plate 3,1 Rubber 3


802 GT/805 GT

Catena rettilinea
Straight running chain / Geradegängige Schanierbandkette

Delivery: Easy Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 130 mm

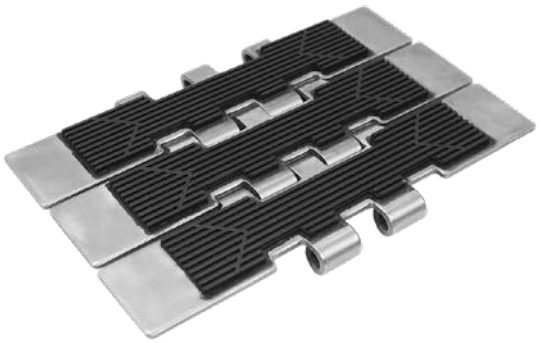

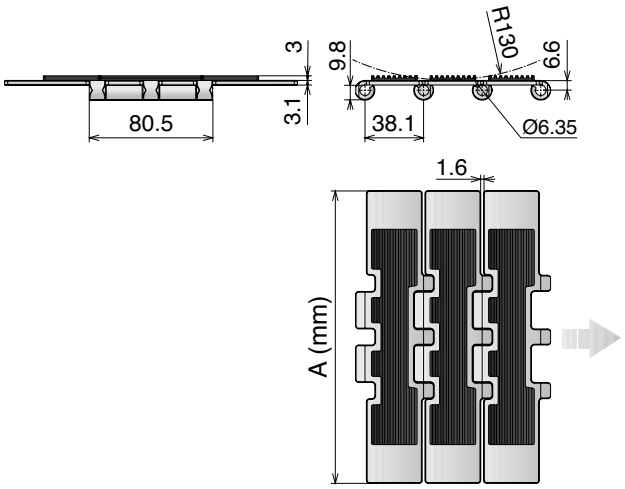

10 feet
3.048 m
80 links

pg. 86-98/109
pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
		SS *Ferritic Stainless Steel (1.4016)*			
10040207	**SS 802 GT K750**	190,5	6,20	7000	Plate 3,1 Rubber 3
		SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**			
10040107	**SSE 805 GT K750**	190,5	6,20	9000	Plate 3,1 Rubber 3


8157 GT

Catena rettilinea
Straight running chain / Geradegängige Schanierbandkette

Delivery: Easy Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 130 mm



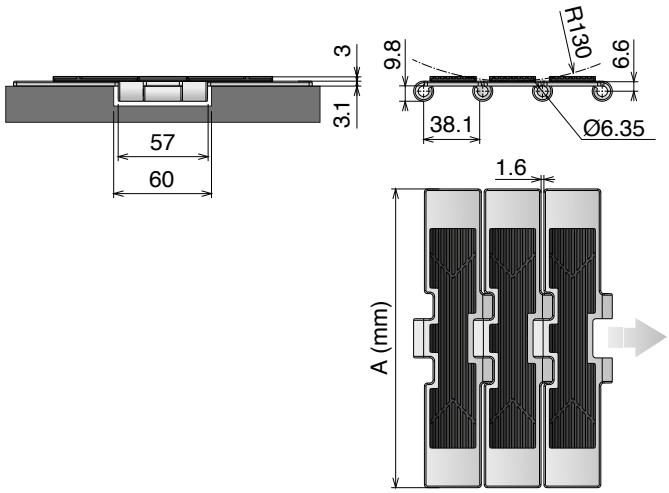

10 feet
3.048 m
80 links

pg. 87-97/110
pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
SSE *Specially treated Ferritic Stainless Steel (1.4589)* - **Hardened pins**					
10060107	**SSE 8157 GT K750**	190,5	6,00	10000	Plate 3,1 Rubber 3


8811 TAB GT

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Pins: Martensitic 1.4057 | **Backflex radius min.:** 80 mm





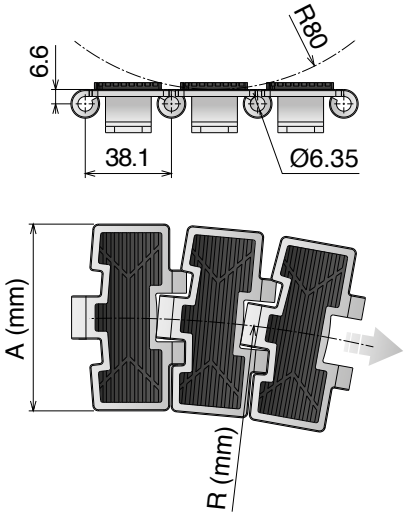

Tab System

10 feet 3.048 m
80 links

pg. 84-85/110
pg. 163/169
pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**						
10150102	**SSE 8811 TAB GT K325**	82,5	500	3,20	6000	Plate 3,1 Rubber 3
10150107	**SSE 8811 TAB GT K750**	190,5	610	5,70		


881 M GT

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy Standard

Pins: Martensitic 1.4057 | **Backflex radius min.:** 80 mm



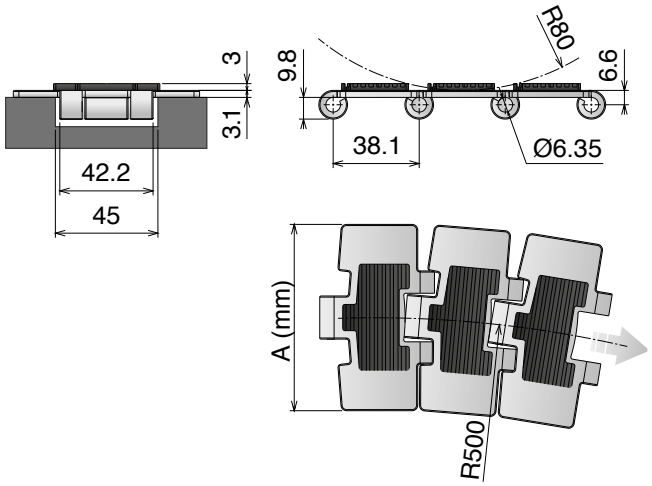

Magnetic System

10 feet 3.048 m — 80 links


pg. 84-85/110
pg. 115->130
pg. 525->528


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
SSE *Specially treated Ferritic Stainless Steel (1.4589)* - **Hardened pins**					
10090102	SSE 881 M GT K325	82,5	2,80	6000	Plate 3,1 Rubber 3
10090107	SSE 881 M GT K750	190,5	5,00		

8857 M GT

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy Standard | **Pins:** Martensitic 1.4057 | **Backflex radius min.:** 70 mm

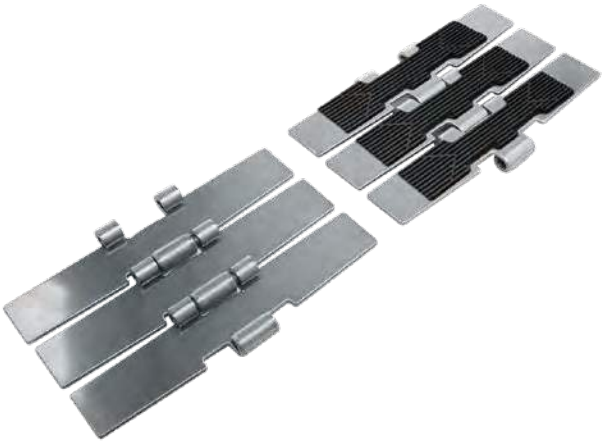

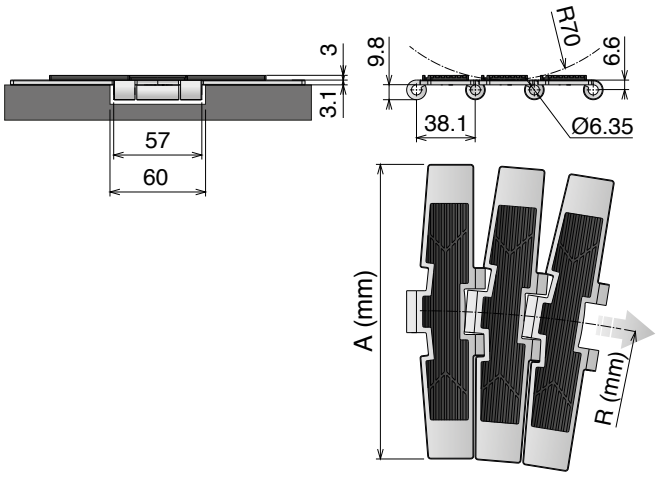

Magnetic System

10 feet 3.048 m — 80 links

pg. 87-97/110
pg. 131->136
pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate/Rubber Thickness mm
SSE *Specially treated Ferritic Stainless Steel (1.4589)* **- Hardened pins**							
10190107	**SSE 8857 M GT K750**	190,5	750	5,70	0,3	10000	Plate 3,1 Rubber 3


1874 TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: Easy | Standard

Backflex radius min.: 260 mm



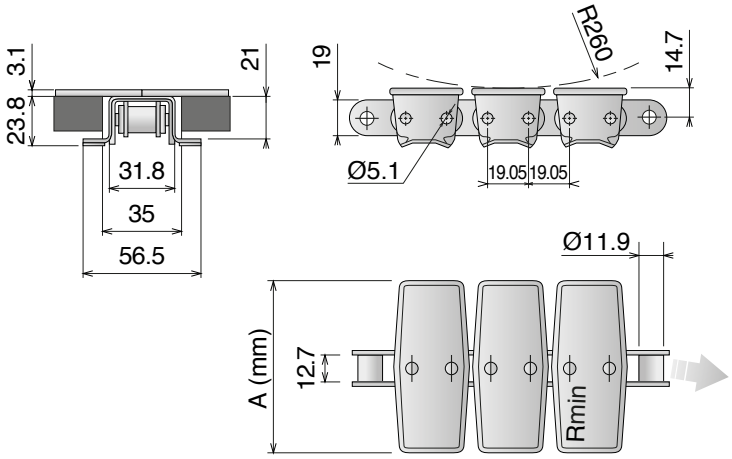

Standard lenght roller chain: 160 Pitches

Tab System

10 feet
3.048 m
80 links

SPROCKET
ASA 60
Standard on market

pg. 165/170
pg. 525->528

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
			Austenitic Stainless Steel				
10220202	SS 1874 TAB K325	82,5	381	4,20	0,5	4500	3,1
10220205	SS 1874 TAB K450	114,3	381	4,80	0,5		
10220206	SS 1874 TAB K600	152,4	457	5,70	0,5		
10220207	SS 1874 TAB K750	190,5	610	6,40	0,5		