
# 600

Pitch 31,75 mm
H= 12,7 mm

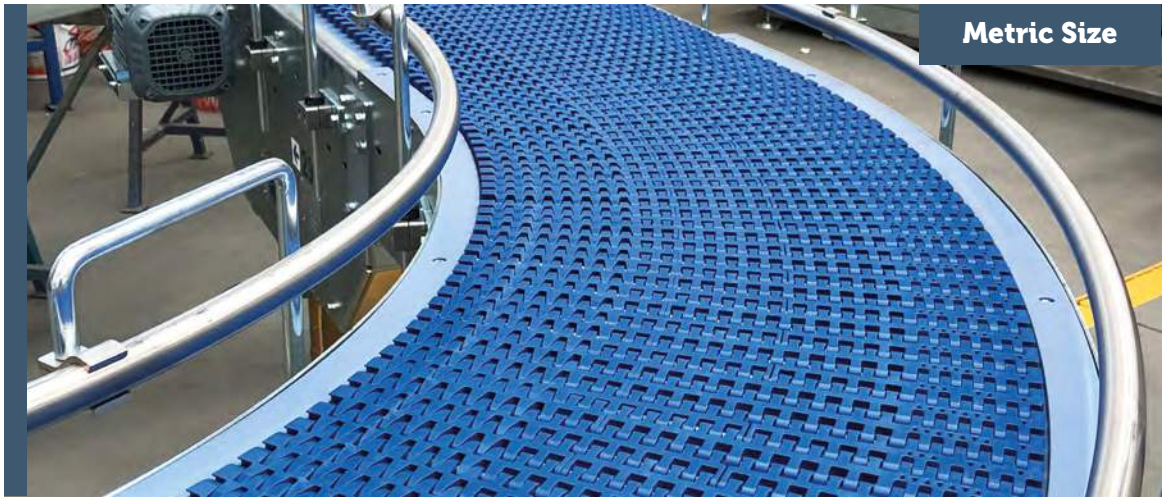

Metric Size

- 600 *Standard*
- 600 *Heavy duty*
- 600 *Heavy duty with Bearings*
- 600 *Small radius*
- 600 *Heavy duty/Small radius*
- 600 *Heavy duty/Small radius with Bearings*
- 600 *with pusher*
- 1047 *Heavy duty guide*


# 600 *with pusher*


**Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85**
***Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85***



**31.75 mm**
PITCH

pg. 283
pg. 516->524

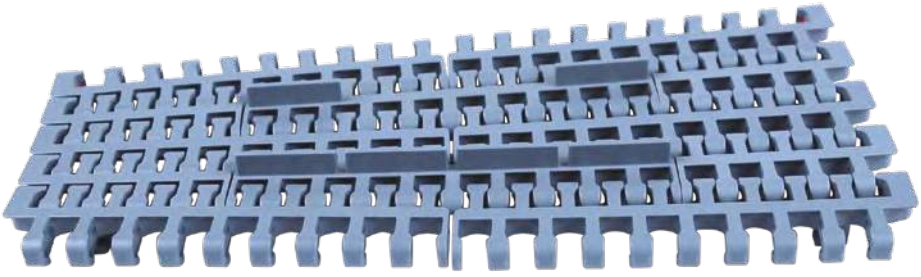

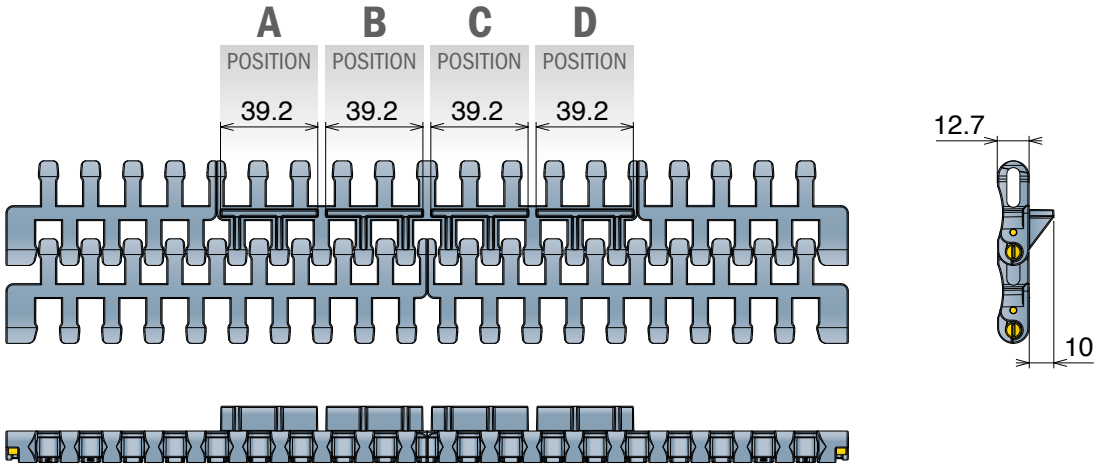


The pusher is applicable only for the center module, and there are available up to a maximum of 4 positions (**A**-**B**-**C**-**D**) or with different types of combinations (example **A**-**B**-**D** / **A**-**C** / **B**-**C**-**D**).


***Consult our engineering department for details.***

# 1047

**Guida tappeto**
***Belt side guide / Seitenführung für Mattenkette***

| Part | Article-Nr. | Material | Width |
|---|---|---|---|
| 1047 | 104700BC | BluLub | 3 m |



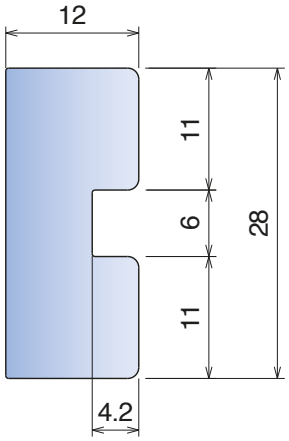


***Material:*** Polyethylene UHMW-PE with moleculardensity 9,200,000 g/mo.

***BluLub*** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*