
552 FT


Tappeto Modulare 552 FT, H=12,7 M=3”
Modular Belt Series 552 FT, H=12,7 M=3” / Modulare Mattenkette 552 FT, H=12,7 M=3”

CODE STRUCTURE GUIDE (Example)			
5341	01	0021	A
Series	*Material	Width	Version

pg. 279 | pg. 516->524 | pg. 492

Backflex radius min.: 25 mm

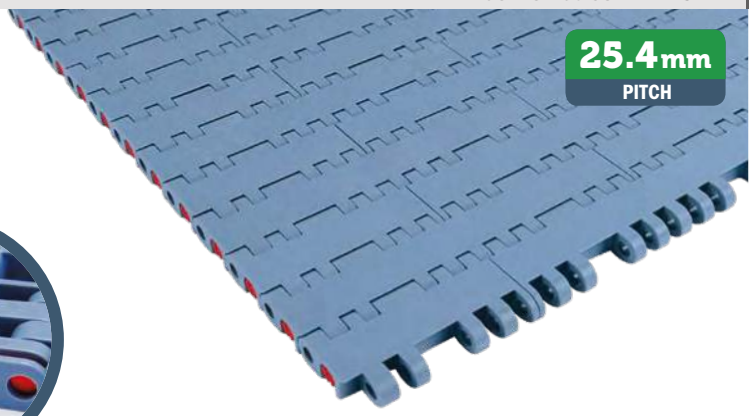



*Material

LFA - Code 01
Low friction Acetal

Easy Delivery

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	13,0 kg/m²
Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷60 °C
Pin material:	POM grey


MWX - Code 17
Polyamide Composite

Max w. load:	41500 N/m
Weight:	14,0 kg/m²
Temp. range dry:	-40÷104 °C
Temp. range wet:	NR
Pin material:	PBT white

MPX - Code 25
Lubricated Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

Version A - Standard

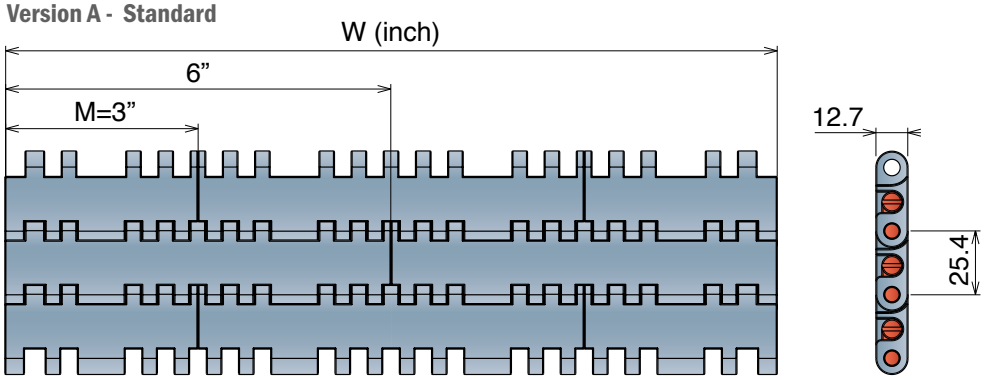

Version A - Standard

Series	Material	Width	Version
5341	*	0009	A
5341	*	0012	A
5341	*	0015	A
5341	*	0018	A
5341	*	0021	A
5341	*	0024	A
5341	*	0027	A
5341	*	0030	A
5341	*	0033	A
5341	*	0036	A
5341	*	0039	A
5341	*	0042	A
5341	*	0045	A
5341	*	0048	A
5341	*	0051	A
5341	*	0054	A


552 FT *One track Belt* Tappeto Modulare 552 FT, H=12,7


Modular Belt Series 552 FT, H=12,7 / Modulare Mattenkette 552 FT, H=12,7

CODE STRUCTURE GUIDE (Example)			
5341	01	0003	A
Series	*Material	Width	Version

pg. 279 pg. 516->524 pg. 493

Backflex radius min.: 25 mm

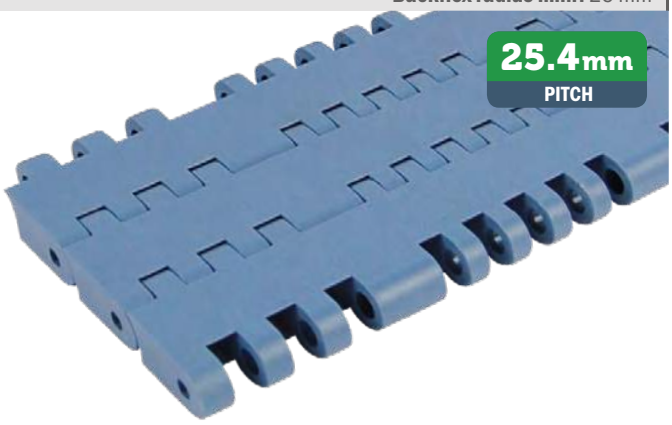



***Material**

LFA - Code 01
Low friction Acetal

Easy Delivery

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	13,0 kg/m²
Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷60 °C
Pin material:	POM grey


MWX - Code 17
Polyamide Composite

Max w. load:	41500 N/m
Weight:	14,0 kg/m²
Temp. range dry:	-40÷104 °C
Temp. range wet:	NR
Pin material:	PBT white


MPX - Code 25
Lubricated Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

Version A - Standard

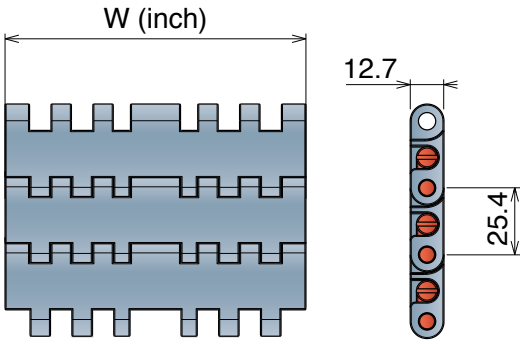

Version C - With 2 Positioner

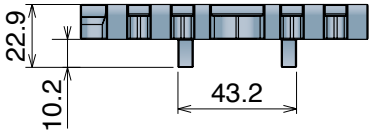

K300 - One track belt



Series	Material	Width	Version
5341	*	0003	A
5341	*	0003	C

K325 - One track belt



Series	Material	Width	Version
5341	*	9325	A
5341	*	9325	C

K450 - One track belt



Series	Material	Width	Version
5341	*	9450	A
5341	*	9450	C

K600 - One track belt



Series	Material	Width	Version
5341	*	0006	A
5341	*	0006	C

K750 - One track belt



Series	Material	Width	Version
5341	*	9750	A
5341	*	9750	C


552 FTT

Tappeto Modulare 552 FTT, H=12,7
Modular Belt Series 552 FTT, H=12,7 / Modulare Mattenkette 552 FTT, H=12,7

CODE STRUCTURE GUIDE (Example)			
5346	01	9450	C-R
Series	*Material	Width	Version

pg. 279 | pg. 516->524 | pg. 493

Backflex radius min.: 25 mm

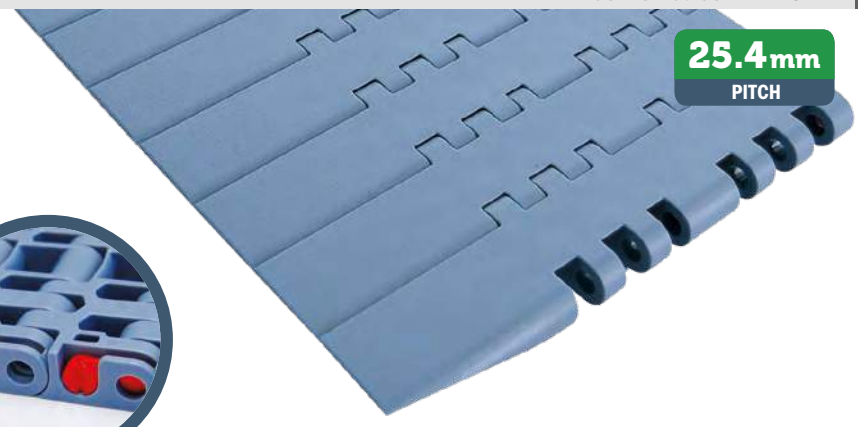

***Material**

LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	13,0 kg/m²
Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷60 °C
Pin material:	POM grey


MWX - Code 17
Polyamide Composite


Max w. load:	41500 N/m
Weight:	14,0 kg/m²
Temp. range dry:	-40÷104 °C
Temp. range wet:	NR
Pin material:	PBT white


MPX - Code 25
Lubricated Acetal

Max w. load:	41500 N/m
Weight:	13,5 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

552 FTT - DX Version

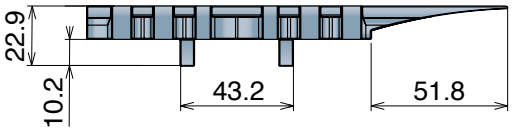

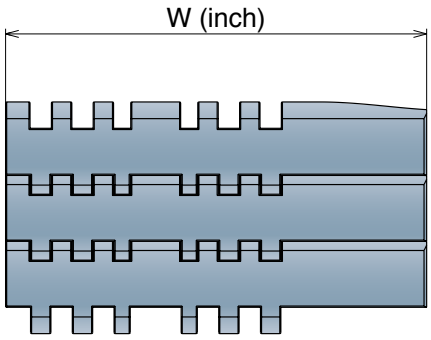






K450 / K750

Series	Material	Width	Version	Total width
5346	*	**9450**	**C - R**	160.3
5346	*	**9750**	**C - R**	237.4

552 FTT - SX Version

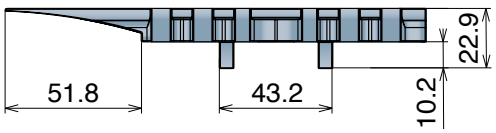

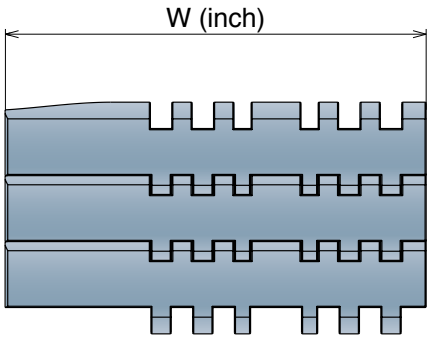



K450 / K750

Series	Material	Width	Version	Total width
5346	*	**9450**	**C - L**	160.3
5346	*	**9750**	**C - L**	237.4


552 PT Open Surface 8% Tappeto Modulare 552 PT, H=12,7 M=3”


Modular Belt Series 552 PT, H=12,7 M=3” / Modulare Mattenkette 552 PT, H=12,7 M=3”

CODE STRUCTURE GUIDE (Example)			
5342	01	0009	A
Series	*Material	Width	Version

pg. 279 pg. 516->524 pg. 492

Backflex radius min.: 25 mm

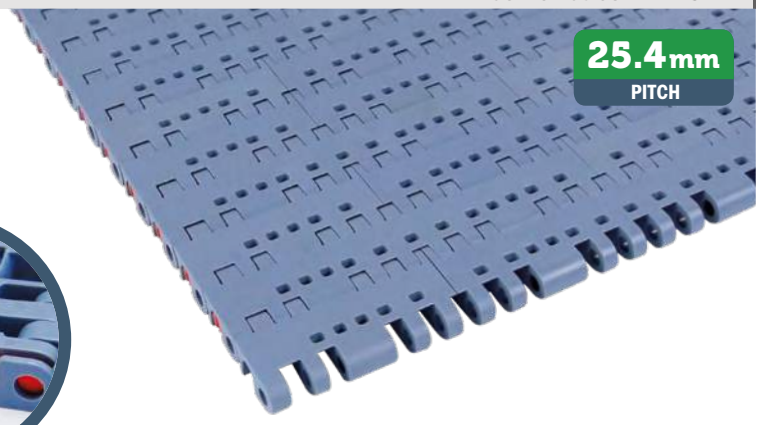



*Material

LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	13,2 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	12,7 kg/m²
Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷60 °C
Pin material:	POM grey


MWX - Code 17
Polyamide Composite

Max w. load:	41500 N/m
Weight:	13,7 kg/m²
Temp. range dry:	-40÷104 °C
Temp. range wet:	NR
Pin material:	PBT white

MPX - Code 25
Lubricated Acetal

Max w. load:	41500 N/m
Weight:	13,2 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

Version A - Standard

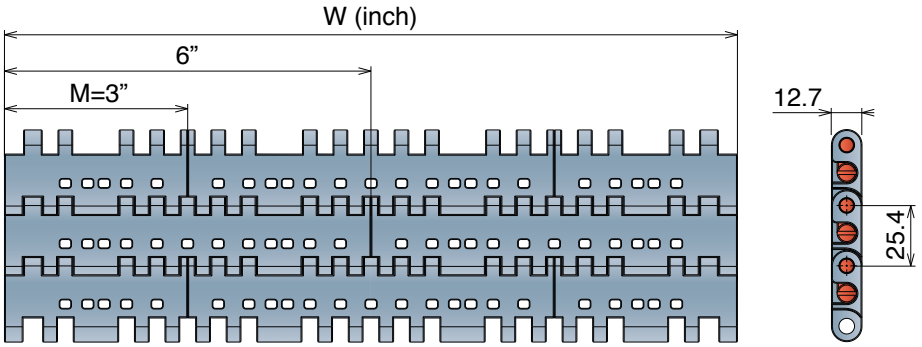

Version A - Standard


Series	Material	Width	Version
5342	*	0009	A
5342	*	0012	A
5342	*	0015	A
5342	*	0018	A
5342	*	0021	A
5342	*	0024	A
5342	*	0027	A
5342	*	0030	A
5342	*	0033	A
5342	*	0036	A
5342	*	0039	A
5342	*	0042	A
5342	*	0045	A
5342	*	0048	A
5342	*	0051	A
5342	*	0054	A


552 PT *One track Belt* Open Surface 8% Tappeto Modulare 552 PT, H=12,7 M=3"

Modular Belt Series 552 PT, H=12,7 M=3" / Modulare Mattenkette 552 PT, H=12,7 M=3"

CODE STRUCTURE GUIDE (Example)			
5342	01	0003	A
Series	*Material	Width	Version

Backflex radius min.: 25 mm

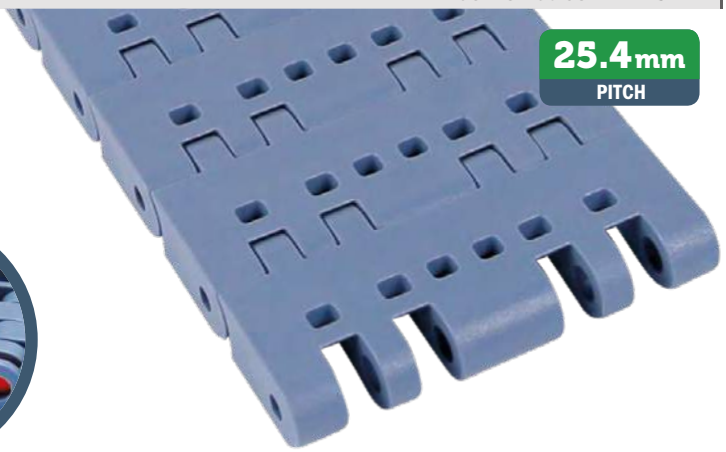



pg. 279
pg. 516->524

*Material

LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	13,2 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT

Max w. load:	33500 N/m
Weight:	12,7 kg/m²
Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷60 °C
Pin material:	POM grey


MWX - Code 17
Polyamide Composite

Max w. load:	41500 N/m
Weight:	13,7 kg/m²
Temp. range dry:	-40÷104 °C
Temp. range wet:	NR
Pin material:	PBT white


MPX - Code 25
Lubricated Acetal

Max w. load:	41500 N/m
Weight:	13,2 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

Version A - Standard

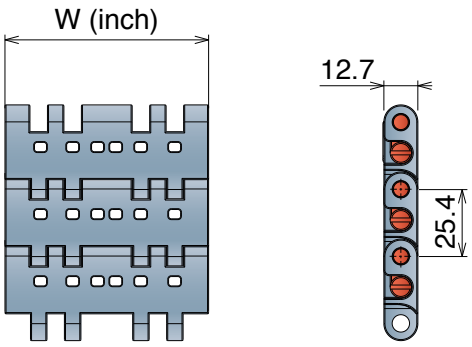

Version C - With 2 Positioner



Version A - Standard

Series	Material	Width	Version
5342	*	0003	A
5342	*	0006	A

Version C - With 2 Positioners

Series	Material	Width	Version
5342	*	0003	C
5342	*	0006	C


552 GT


Tappeto Modulare 552 GT, H=12,7 M=3”
Modular Belt Series 552 GT, H=12,7 M=3” / Modulare Mattenkette 552 GT, H=12,7 M=3”

CODE STRUCTURE GUIDE (Example)			
5343	01	0009	A-S
Series	*Material	Width	Version

pg. 279 | pg. 516->524 | pg. 492

Backflex radius min.: 25 mm

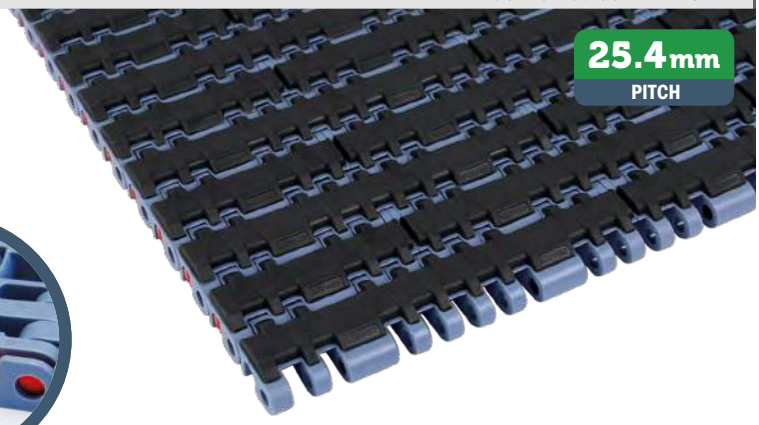



*Material


LFA - Code 01
Low friction Acetal

Max w. load:	41500 N/m
Weight:	15,5 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white
Hardness of Grip top Rubber:	50 ShA

PP - Code 02
Polypropylene

Max w. load:	27000 N/m
Weight:	13,5 kg/m²
Temp. range dry:	4÷80 °C
Temp. range wet:	4÷65 °C
Pin material:	PP blu
Hardness of Grip top Rubber:	50 ShA

Version A - Standard

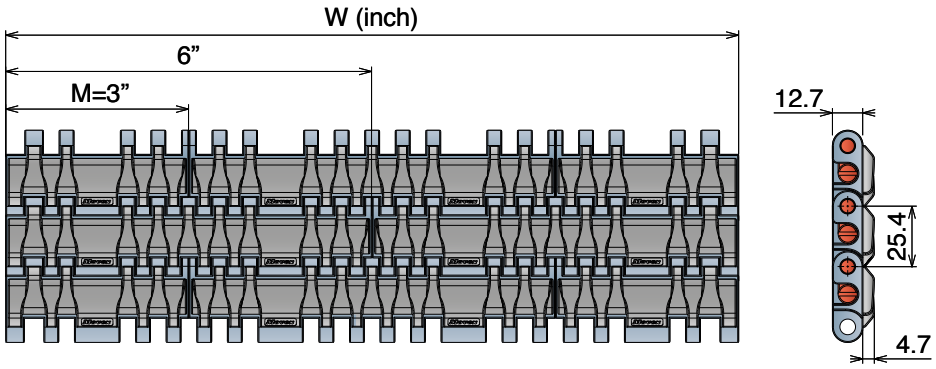

Version A - Standard

Series	Material	Width	Version
5343	*	0009	A
5343	*	0012	A
5343	*	0015	A
5343	*	0018	A
5343	*	0021	A
5343	*	0024	A
5343	*	0027	A
5343	*	0030	A
5343	*	0033	A
5343	*	0036	A
5343	*	0039	A
5343	*	0042	A
5343	*	0045	A
5343	*	0048	A
5343	*	0051	A
5343	*	0054	A



Rubber Thickness 4.7 mm


552 GT *Side indent* Tappeto Modulare 552 GT SI, H=12,7 M=3”


Modular Belt Series 552 GT SI, H=12,7 M=3” / Modulare Mattenkette 552 GT SI, H=12,7 M=3”

CODE STRUCTURE GUIDE (Example)			
5345	01	0009	A-S
Series	*Material	Width	Version

pg. 279 | pg. 516->524 | pg. 492

Backflex radius min.: 25 mm

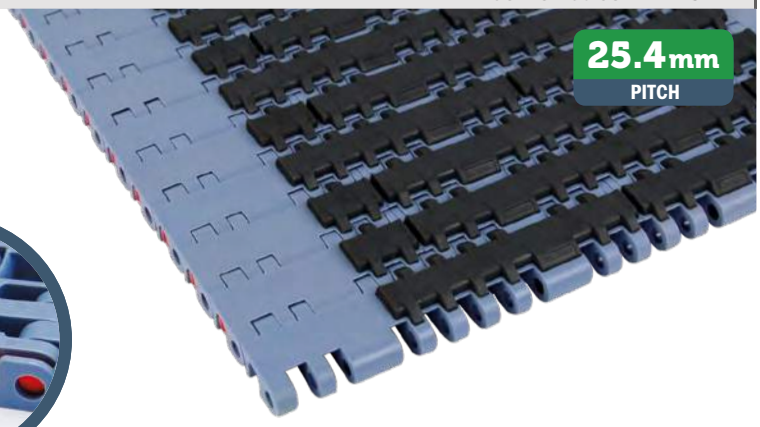



***Material**

LFA - Code 01
Low friction Acetal


Max w. load:	41500 N/m
Weight:	15,5 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white
Hardness of Grip top Rubber:	50 ShA

PP - Code 02
Polypropylene

Max w. load:	27000 N/m
Weight:	13,5 kg/m²
Temp. range dry:	4÷80 °C
Temp. range wet:	4÷65 °C
Pin material:	PP blu
Hardness of Grip top Rubber:	50 ShA

Available also with 75 ShA Rubber

Version A - Standard

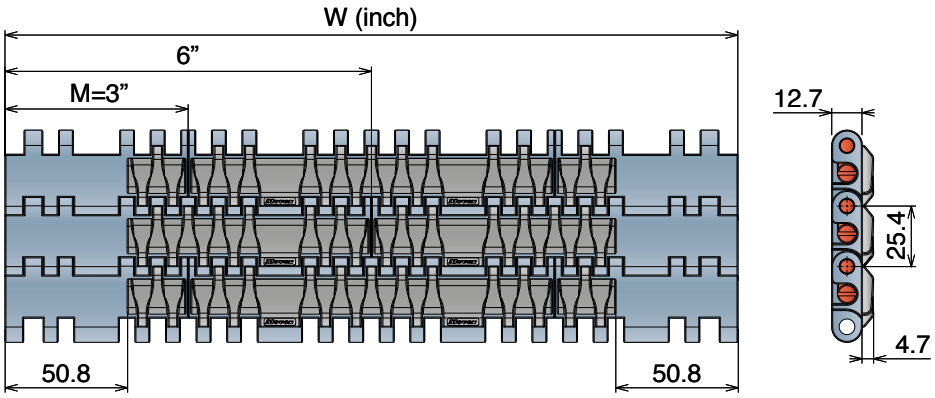

Version A - Standard

Series	Material	Width	Version
5345	*	0009	A
5345	*	0012	A
5345	*	0015	A
5345	*	0018	A
5345	*	0021	A
5345	*	0024	A
5345	*	0027	A
5345	*	0030	A
5345	*	0033	A
5345	*	0036	A
5345	*	0039	A
5345	*	0042	A
5345	*	0045	A
5345	*	0048	A
5345	*	0051	A
5345	*	0054	A



Rubber Thickness 4.7 mm