550

Pitch 25,4 mm
H= 8,7 mm



Metric Size

550 FT
550 FT *One track Belt*
550 FTT
550 FG
550 FG *One track Belt*
550 GT
550 GT *Side indent*
550 PRO FT
550 PRO M

Movex®


550 FG *One track Belt* Open Surface 25% Tappeto Modulare 550 FG, H=8,7 K330

Modular Belt Series 550 FG, H=8,7 K330 / Modulare Mattenkette 550 FG, H=8,7 K330

CODE STRUCTURE GUIDE (Example)			
5222	01	9330	A
Series	*Material	Width	Version

pg. 273-274 pg. 516->524

Backflex radius min.: 25 mm

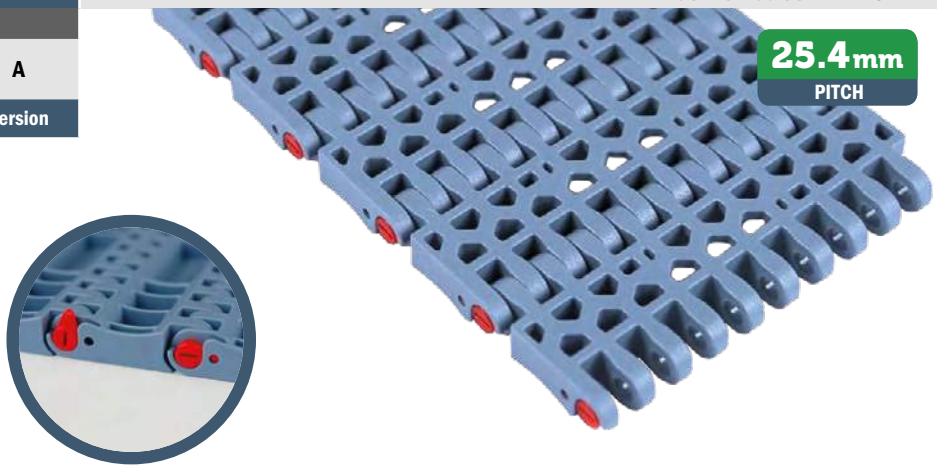

*Material

LFA - Code 01
Low friction Acetal

Easy Delivery

Max w. load:	27500 N/m
Weight:	7,0 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

MX - Code 03
Performance PBT


Max w. load:	22000 N/m
Weight:	6,7 kg/m²
Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷60 °C
Pin material:	POM grey

PFX - Code 30
Extra performance PBT


Max w. load:	22000 N/m
Weight:	6,7 kg/m²
Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷60 °C
Pin material:	POM grey

THE BEST CHOICE FOR DRY RUNNING APPLICATIONS

Version A - Standard

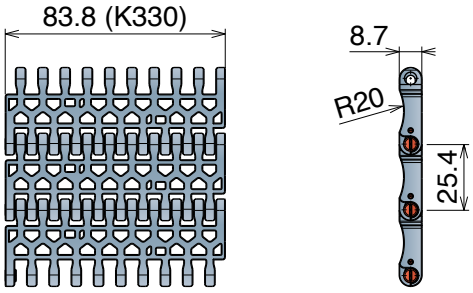

Version C - With 2 Positioner

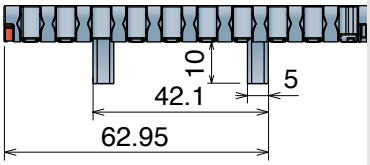

Version A - Standard

Series	Material	Width	Version
5222	*	9330	A

Version C - With 2 Positioners

Series	Material	Width	Version
5222	*	9330	C