
6&8 Extruded Profiles




Z-Profile

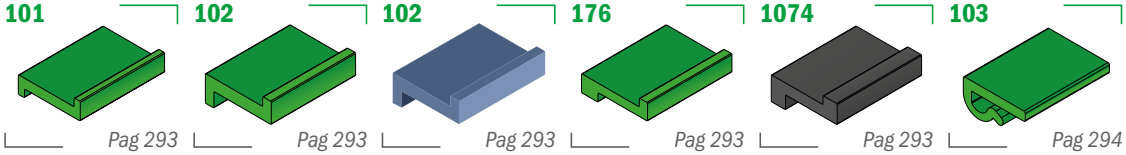


101 Pag 293
102 Pag 293
102 Pag 293
176 Pag 293
1074 Pag 293
103 Pag 294
104 Pag 294
179 Pag 294

L-Profile

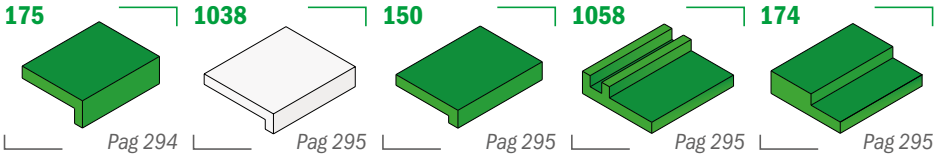

175 Pag 294
1038 Pag 295
150 Pag 295
1058 Pag 295
174 Pag 295

J-Profile

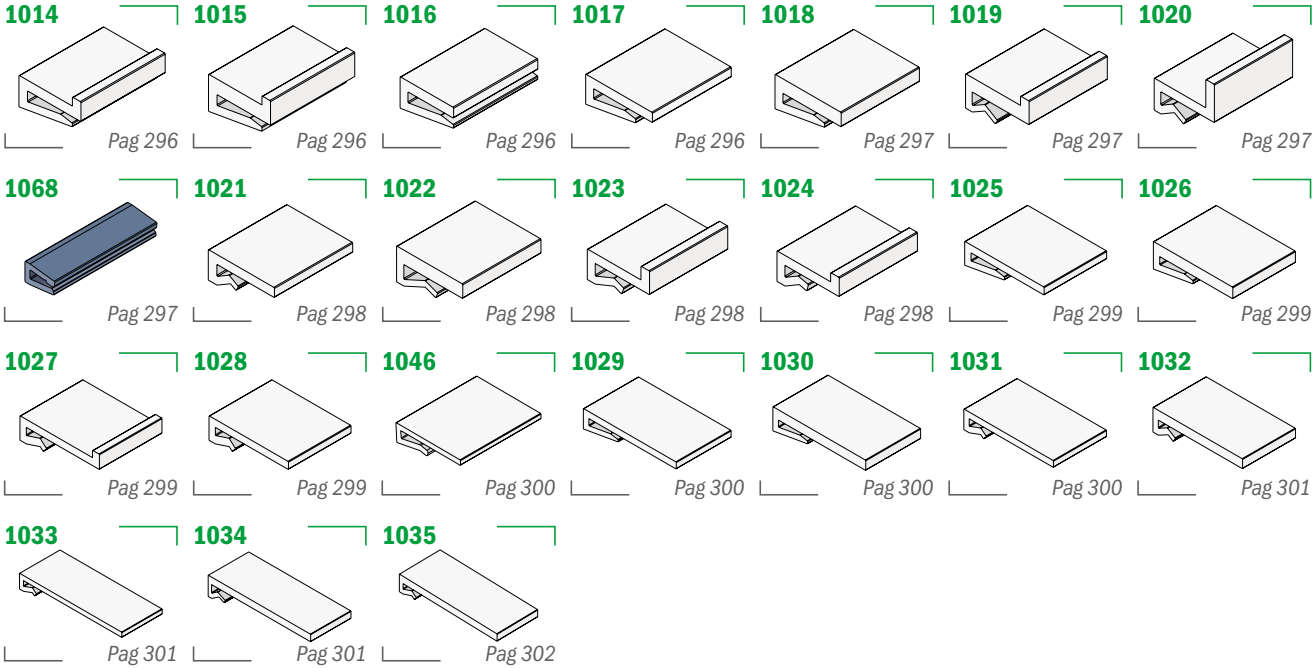


1014 Pag 296
1015 Pag 296
1016 Pag 296
1017 Pag 296
1018 Pag 297
1019 Pag 297
1020 Pag 297
1068 Pag 297
1021 Pag 298
1022 Pag 298
1023 Pag 298
1024 Pag 298
1025 Pag 299
1026 Pag 299
1027 Pag 299
1028 Pag 299
1046 Pag 300
1029 Pag 300
1030 Pag 300
1031 Pag 300
1032 Pag 301
1033 Pag 301
1034 Pag 301
1035 Pag 302

Extruded Profiles


Flat profile

105



Pag 302


106



Pag 302

Wear strip


107



Pag 303

T-profile


108



Pag 303


Flat clip-on

109




Pag 303

110



Pag 304


156



Pag 304

Stainless steel profile


112



Pag 304

Aluminum profile


147



Pag 305


Profile assembled clip-on

133




Pag 305

148



Pag 305


157



Pag 306


Bar cover

180




Pag 310

181



Pag 310


1052



Pag 310


D- Profile and U-profile

118




Pag 306

149




Pag 307

177




Pag 307

1059




Pag 307

178




Pag 308

111




Pag 308

1060




Pag 308

199




Pag 309

U-PROFILE



Pag 309


U-PROFILE SV



Pag 309


Bar cap

1000




Pag 311

1001




Pag 311

1002




Pag 311

1003




Pag 311

1004




Pag 312

1006




Pag 312

153




Pag 312

1007




Pag 313

1008




Pag 313

1009




Pag 313

1010




Pag 313

1011




Pag 314

1012



Pag 314


1013



Pag 314

Belt side guide

1040



Pag 314

Guide rail

119

Pag 315

120

Pag 315

121

Pag 315


152


Pag 316


1067


Pag 316


Guide rail T-shape


122  Pag 316


123  Pag 317


140  Pag 317

146  Pag 317


124  Pag 318


143  Pag 318

141  Pag 318


142  Pag 319


Guide rail L-shape

125  Pag 319


144  Pag 319

Guide rail for chain and Guide rail for label protection


184  Pag 320


191  Pag 320

Belt side guide


145  Pag 320

Aluminum rail for bottle guide

130  Pag 321

188  Pag 321

Plastic rail for bottle guide


131  Pag 321


Bending machine and Roller


199  Pag 321


151  Pag 322/323


Neck guide


170  Pag 324


168  Pag 324


169  Pag 324


1036  Pag 324


1037  Pag 325


167  Pag 325


171  Pag 325


172  Pag 325

173  Pag 326


192  Pag 326


1062  Pag 326


1072  Pag 326


1073  Pag 327

Profile for aluminum guide


163  Pag 328


160  Pag 328

161  Pag 328


162  Pag 329


Aluminum guide


164  Pag 329

165  Pag 329

Side and Standard guide rail


154  Pag 330


155  Pag 330


134  Pag 330


Extruded Profiles


C-Profile


1041

Pag 331


1042

Pag 331

1043

Pag 331


1044

Pag 332


1045

Pag 332

137

Pag 333


137

Pag 333


Bar cover

1053

Pag 332


1054

Pag 333

Stainless steel guide

117

Pag 334

1055

Pag 334


Aluminum guide

159

Pag 334

Side guide rail

135

Pag 335


136

Pag 335


1063


Pag 336


1064


Pag 336


158

Pag 337


158

Pag 337


182

Pag 338


1065

Pag 338


189

Pag 339


189

Pag 339


193

Pag 340


187

Pag 340

1056

Pag 341


1057

Pag 341


186

Pag 342

1061

Pag 342

183

Pag 343

Profile for steel rods

166

Pag 343

1039

Pag 343

Central wear strip shoe

113

Pag 344

113

Pag 344

Side transfer guide shoe

116

Pag 345

116

Pag 345

Fixing clamp

114

Pag 344

Connecting element

115

Pag 345


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


101


Profilo "Z" / *Z-Profile / Z-Profil*

Delivery: **Easy** **Standard** On request available in white color

Part	Article-Nr.	Colour	Availability	Supply
101	10101	black	Stock item	60 m coils
101	10102	green	Stock item	60 m coils





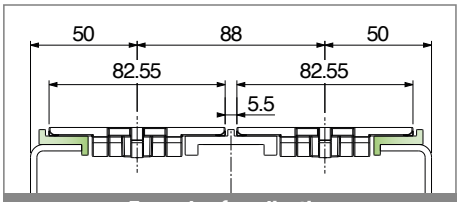


Example of application


102

Profilo Z-clip rinforzato/ *Z-clip profile reinforced / Z Profil verstärkt*


Delivery: **Easy** **Standard** On request available in white color


Part	Article-Nr.	Colour	Availability	Supply
102	10201	black	Stock item	60 m coils
102	10202	green	Stock item	60 m coils
102	10202B	BluLub	Stock item	60 m coils




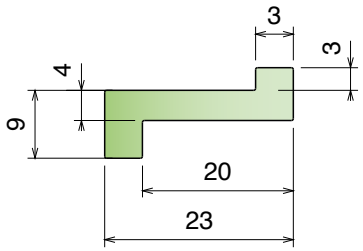

Part	Article-Nr.	Colour	Availability	Supply
102	10297	black	Stock item	60 m coils
102	10298	green	Stock item	60 m coils
102	10299B	BluLub	Stock item	60 m coils



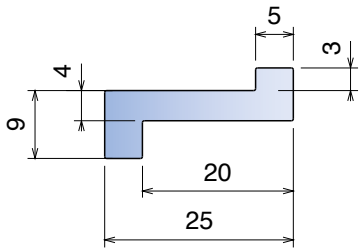

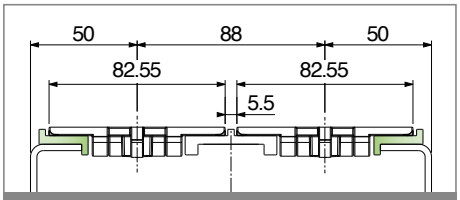


Example of application


176


Profilo "Z" / *Z-Profile / Z-Profil*

On request available in white color

Part	Article-Nr.	Colour	Availability	Supply
176	17601	black	Stock item	60 m coils
176	17602	green	Stock item	60 m coils



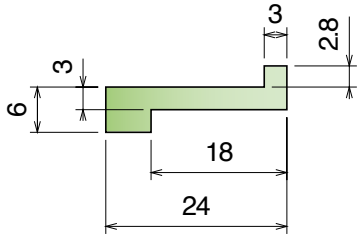

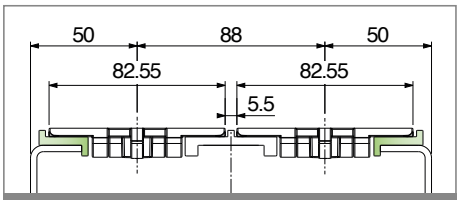


Example of application


1074


Profilo "Z" / *Z-Profile / Z-Profil*

On request available in white color

Part	Article-Nr.	Colour	Availability	Supply
1074	107401	black	Stock item	60 m coils



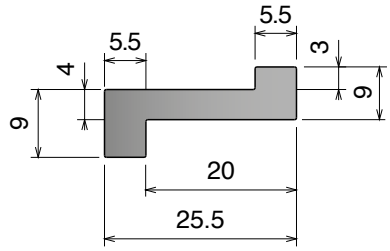

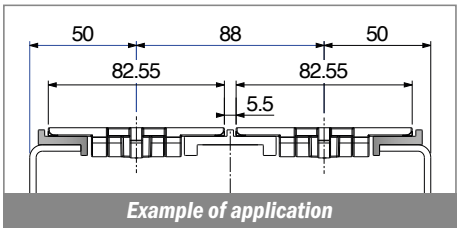


Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)

103


Profilo Z-clip senza bordo / *Z-clip profile without nose / Z Profil ohne Nase*

Delivery: **Easy** **Standard** Fit on 2,5 to 3,5 mm



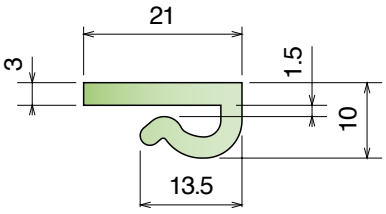

Part	Article-Nr.	Colour	Availability	Supply
103	10301	black	Stock item	60 m coils
103	10302	green	Stock item	60 m coils
103	10303	white	Stock item	60 m coils
103	10300B-30	BluLub	Stock item	30 m coils

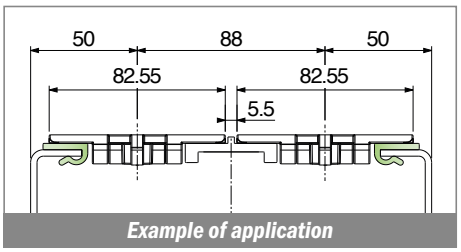



Example of application

104


Profilo Z-clip con bordo / *Z-clip profile with nose / Z Profil mit Nase*

Delivery: **Easy** **Standard** Fit on 2,5 to 3,5 mm



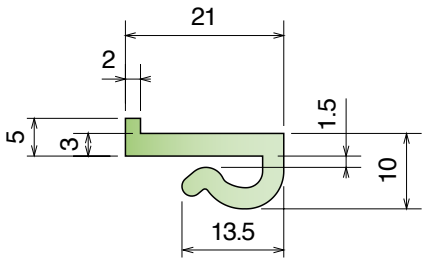

Part	Article-Nr.	Colour	Availability	Supply
104	10401	black	Stock item	60 m coils
104	10402	green	Stock item	60 m coils
104	10403	white	Stock item	60 m coils
103	10400B	BluLub	Stock item	30 m coils

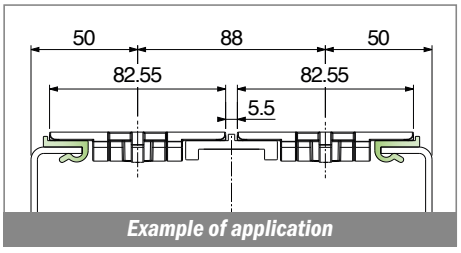



Example of application

179


Profilo Z-clip con bordo / *Z-clip profile with nose / Z Profil mit Nase*

Delivery: **Easy** **Standard** On request available in white color | Fit on 2,5 to 3,5 mm



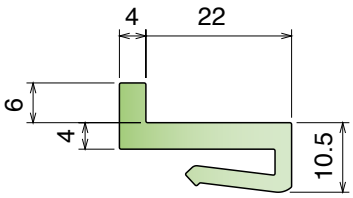

Part	Article-Nr.	L	Colour	Availability	Supply
179	17901C	3 m	black	Stock item	3 m bars
179	17901	6 m	black	On request	6 m bars
179	17902C	3 m	green	Stock item	3 m bars
179	17902	6 m	green	On request	6 m bars
179	17902-60	60 m	green	Stock item	60 m coils

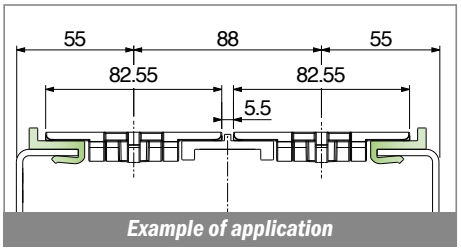



Example of application

175


Profilo "L" / *L-Profile / L-Profil*

On request available in white color





Part	Article-Nr.	Colour	Availability	Supply
175	17501	black	Stock item	60 m coils
175	17502	green	Stock item	60 m coils

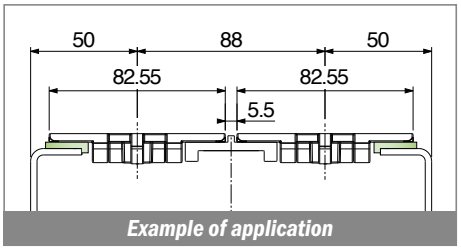

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1038


Profilo "L" / *L-Profile / L-Profil*

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1038	103803	60 m	white	On request	60 m coils





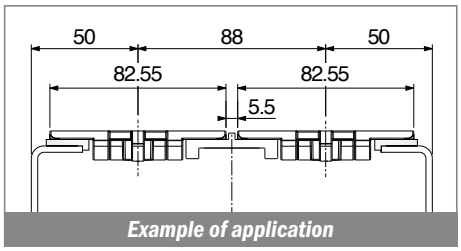


Example of application


150


Profilo "L" / *L-Profile / L-Profil*

Delivery: **Easy** **Standard** On request available in white color

Part	Article-Nr.	Colour	Availability	Supply
150	15001	black	Stock item	60 m coils
150	15002	green	Stock item	60 m coils





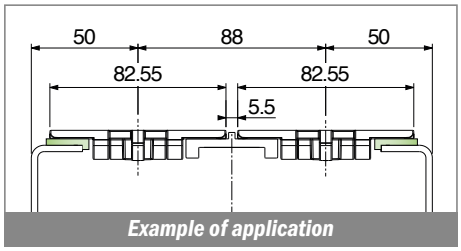


Example of application


1058


Profilo "L" / *L-Profile / L-Profil*

On request available in white color

Part	Article-Nr.	L	Colour	Availability	Supply
1058	105801C	3 m	black	Stock item	3 m bars
1058	105801	6 m	black	On request	6 m bars
1058	105802C	3 m	green	Stock item	3 m bars
1058	105802	6 m	green	On request	6 m bars



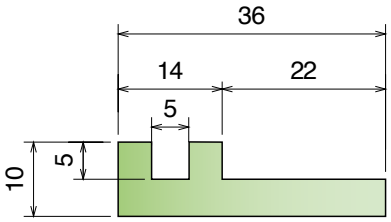

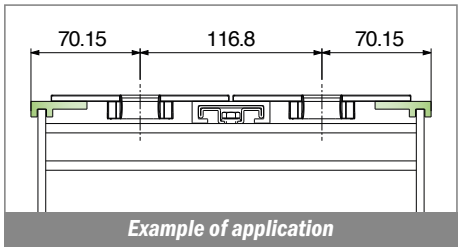


Example of application


174


Profilo "L" / *L-Profile / L-Profil*

On request available in white color

Part	Article-Nr.	L	Colour	Availability	Supply
174	17401C	3 m	black	Stock item	3 m bars
174	17401	6 m	black	On request	6 m bars
174	17402C	3 m	green	Stock item	3 m bars
174	17402	6 m	green	On request	6 m bars



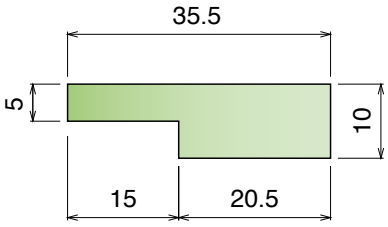

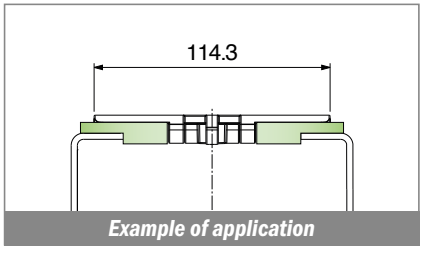

Example of application

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1014


Profilo J-Leg 19.05 / *J-Leg Profile 19.05 / J Profil mit Nase 19.05*


North America STANDARD

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1014	101403C	3 m	white	On request	3 m bars
1014	101403	6 m	white	On request	6 m bars



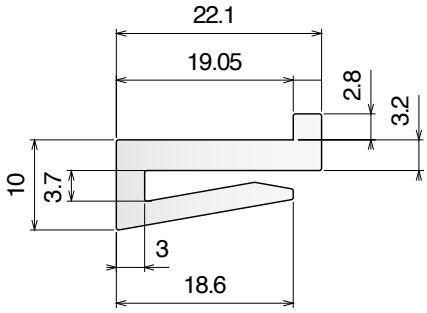

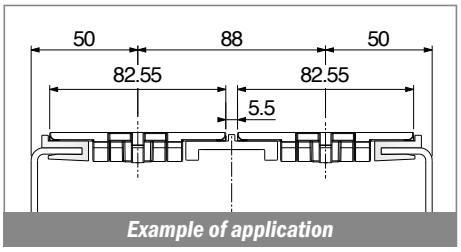

Example of application


1015


Profilo J-Leg 19.05 / *J-Leg Profile 19.05 / J Profil mit Nase 19.05*


North America STANDARD

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1015	101503C	3 m	white	On request	3 m bars
1015	101503	6 m	white	On request	6 m bars



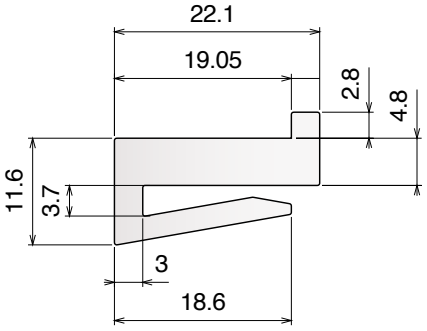

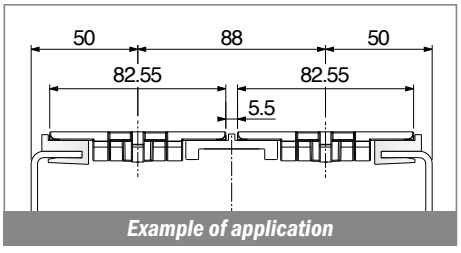

Example of application


1016


Profilo J-Leg 19.05 / *J-Leg Profile 19.05 / J Profil 19.05*


North America STANDARD

Delivery: Easy Standard | Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1016	101603C	3 m	white	On request	3 m bars
1016	101603	6 m	white	On request	6 m bars
1016	101603-30	30 m	white	On request	30 m coils



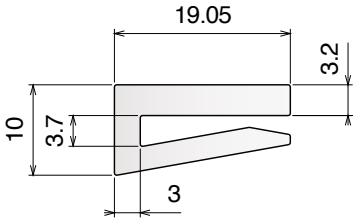

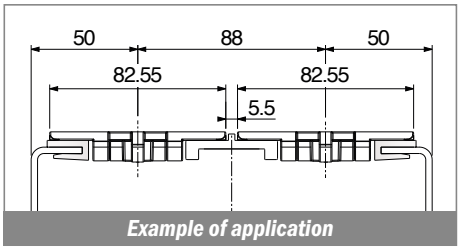

Example of application


1017


Profilo J-Leg 25.4 / *J-Leg Profile 25.4 / J Profil 25.4*


North America STANDARD

Delivery: Easy Standard | Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1017	101703C	3 m	white	On request	3 m bars
1017	101703	6 m	white	On request	6 m bars
1017	101703-30	30 m	white	On request	30 m coils
1017	101703-75	75 m	white	On request	75 m coils



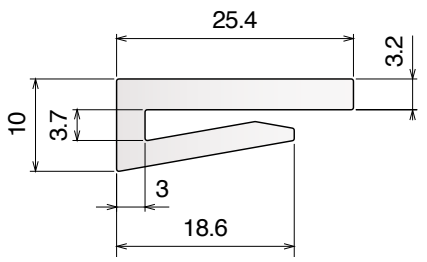

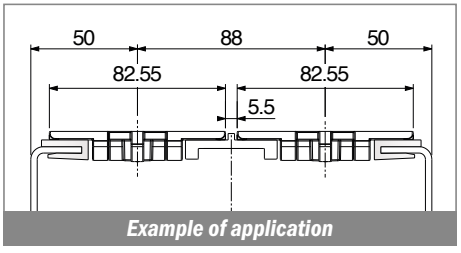

Example of application


1018


Profilo J-Leg 25.4 / *J-Leg Profile 25.4 / J Profil 25.4*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1018	101803C	3 m	white	On request	3 m bars
1018	101803	6 m	white	On request	6 m bars



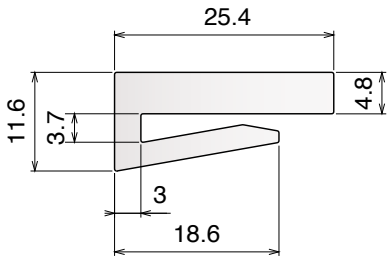

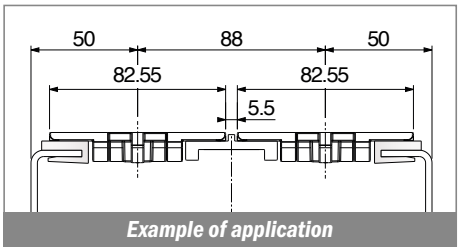

Example of application


1019


Profilo J-Leg 25.4 / *J-Leg Profile 25.4 / J Profil 25.4*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1019	101903C	3 m	white	On request	3 m bars
1019	101903	6 m	white	On request	6 m bars



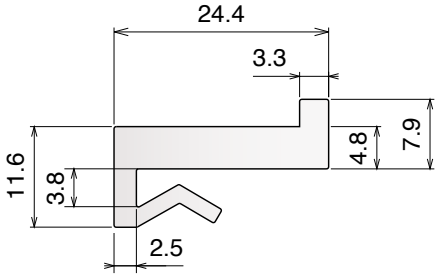

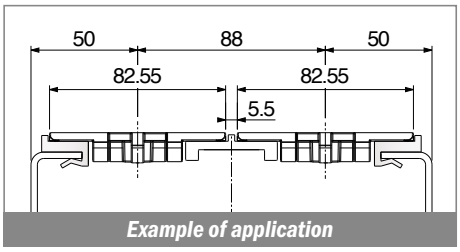

Example of application


1020


Profilo J-Leg 25.4 / *J-Leg Profile 25.4 / J Profil 25.4*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1020	102003C	3 m	white	On request	3 m bars
1020	102003	6 m	white	On request	6 m bars



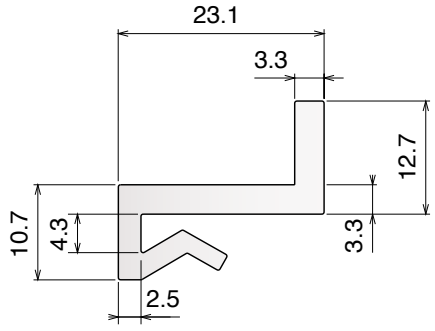

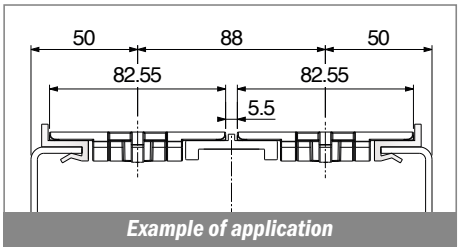


Example of application


1068


Guida collo / *Neck guide / Nackenführung*

Fit on 1.8 - 2 mm

Part	Article-Nr.	L	Material	Availability	Supply
1068	106800B	30 m	BluLub	Stock item	30 m coils





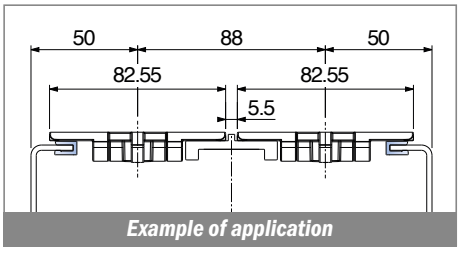

Example of application

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1021


Profilo J-Leg 25.4 / *J-Leg Profile 25.4 / J Profil 25.4*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1021	102103C	3 m	white	On request	3 m bars
1021	102103	6 m	white	On request	6 m bars
1021	102103-30	30 m	white	On request	30 m coils
1021	102103-75	75 m	white	On request	75 m coils



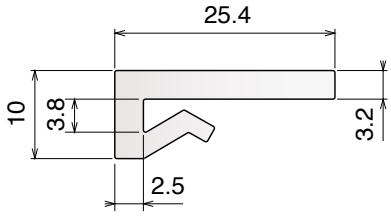

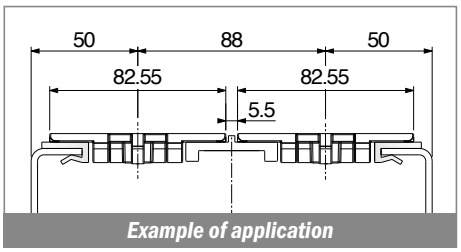

Example of application


1022


Profilo J-Leg 25.4 / *J-Leg Profile 25.4 / J Profil 25.4*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1022	102203C	3 m	white	On request	3 m bars
1022	102203	6 m	white	On request	6 m bars
1022	102203-30	30 m	white	On request	30 m coils



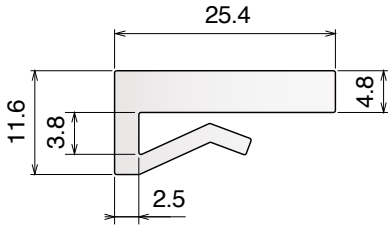

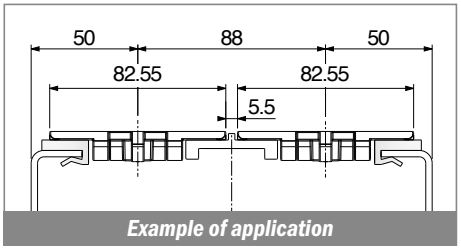

Example of application


1023


Profilo J-Leg 25.4 / *J-Leg Profile 25.4 / J Profil 25.4*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1023	102303C	3 m	white	On request	3 m bars
1023	102303	6 m	white	On request	6 m bars



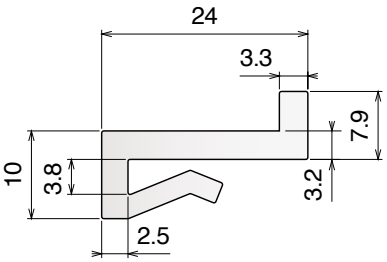

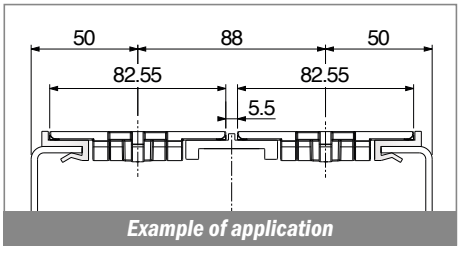

Example of application


1024


Profilo J-Leg 25.4 / *J-Leg Profile 25.4 / J Profil 25.4*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1024	102403C	3 m	white	On request	3 m bars
1024	102403	6 m	white	On request	6 m bars
1024	102403-30	30 m	white	On request	30 m coils
1024	102402	6 m	green	On request	6 m bars



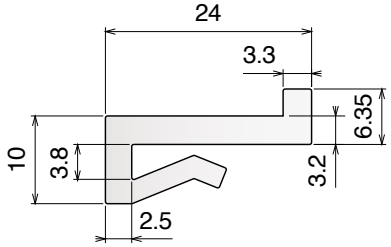

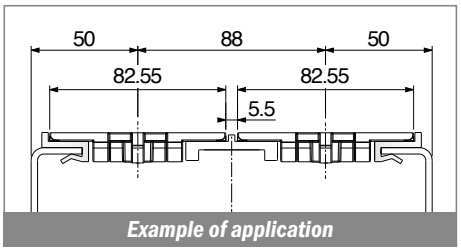

Example of application

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1025


Profilo J-Leg 38.1 / *J-Leg Profile 38.1 / J Profil 38.1*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1025	102503C	3 m	white	On request	3 m bars
1025	102503	6 m	white	On request	6 m bars
1025	102503-30	30 m	white	On request	30 m coils



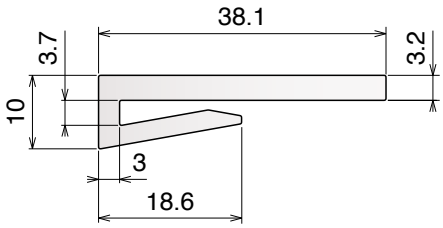

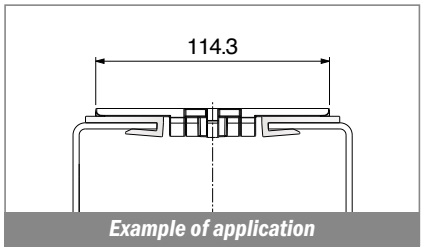

Example of application


1026


Profilo J-Leg 38.1 / *J-Leg Profile 38.1 / J Profil 38.1*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1026	102603C	3 m	white	On request	3 m bars
1026	102603	6 m	white	On request	6 m bars



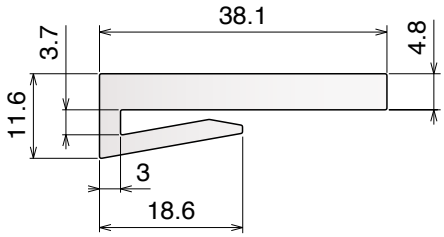

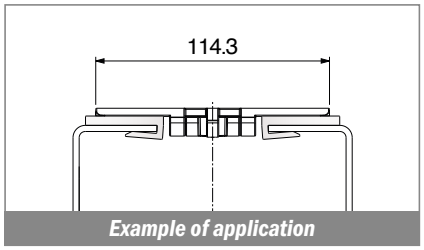

Example of application


1027


Profilo J-Leg 38.1 / *J-Leg Profile 38.1 / J Profil 38.1*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1027	102703C	3 m	white	On request	3 m bars
1027	102703	6 m	white	On request	6 m bars



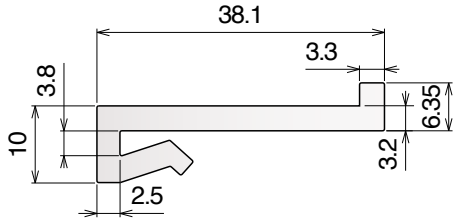

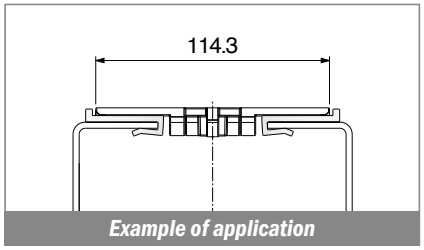

Example of application


1028


Profilo J-Leg 38.1 / *J-Leg Profile 38.1 / J Profil 38.1*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1028	102803C	3 m	white	On request	3 m bars
1028	102803	6 m	white	On request	6 m bars



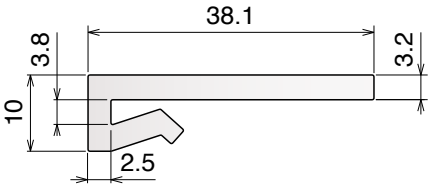

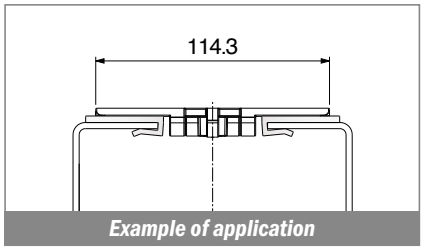

Example of application

1046-1029-1030-1031

Guide estruse / *Extruded profiles / Extrudiertes profil*

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1046


Profilo J-Leg 40 / *J-Leg Profile 40 / J Profil 40*


North America STANDARD

Delivery: Easy | Standard | Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1046	104602C	3 m	green	On request	3 m bars
1046	104603C	3 m	white	On request	3 m bars
1046	104602-30	30 m	green	On request	30 m coils



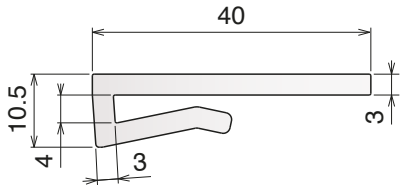

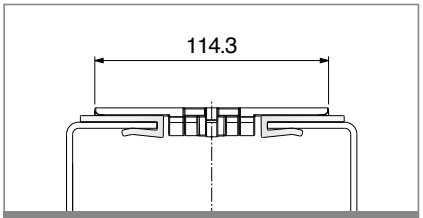

Example of application


1029


Profilo J-Leg 50.8 / *J-Leg Profile 50.8 / J Profil 50.8*


North America STANDARD

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1029	102903C	3 m	white	On request	3 m bars
1029	102903	6 m	white	On request	6 m bars

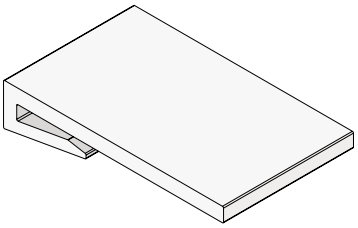

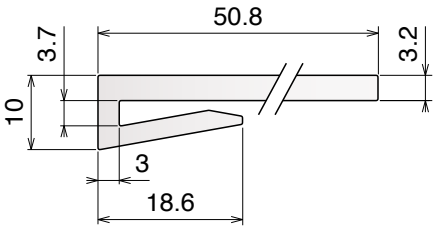

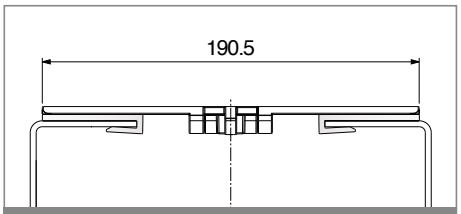

Example of application


1030


Profilo J-Leg 50.8 / *J-Leg Profile 50.8 / J Profil 50.8*


North America STANDARD

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1030	103003C	3 m	white	On request	3 m bars
1030	103003	6 m	white	On request	6 m bars

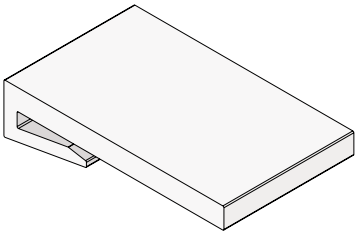

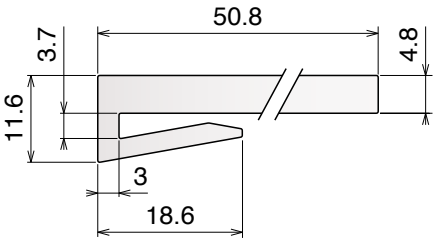

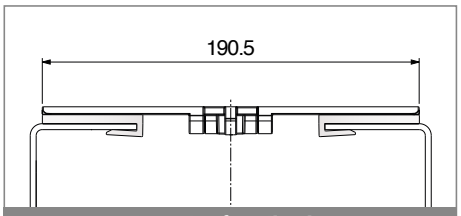

Example of application


1031


Profilo J-Leg 50.8 / *J-Leg Profile 50.8 / J Profil 50.8*


North America STANDARD

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1031	103103C	3 m	white	On request	3 m bars
1031	103103	6 m	white	On request	6 m bars

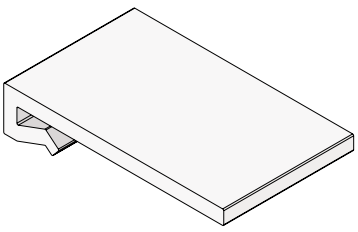

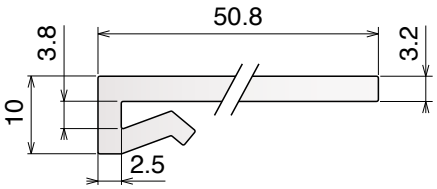

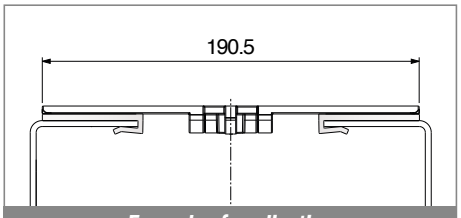

Example of application

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1032


Profilo J-Leg 50.8 / *J-Leg Profile 50.8 / J Profil 50.8*


Fit on 3 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1032	103203C	3 m	white	On request	3 m bars
1032	103203	6 m	white	On request	6 m bars

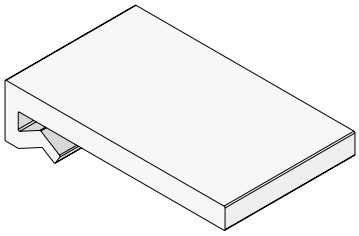

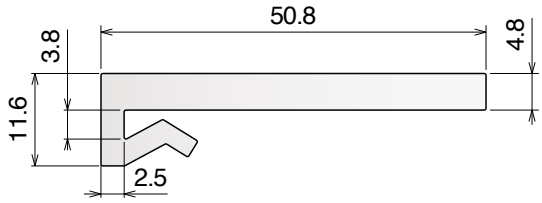

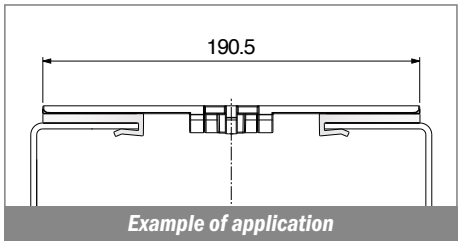

Example of application


1033


Profilo J-Leg 76.2 / *J-Leg Profile 76.2 / J Profil 76.2*

Fit on 3 mm


North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1033	103303C	3 m	white	On request	3 m bars
1033	103303	6 m	white	On request	6 m bars

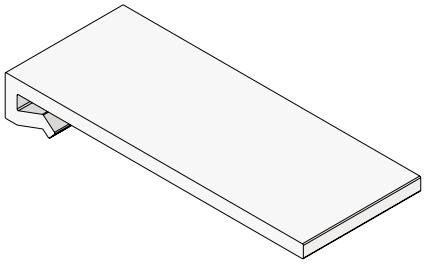

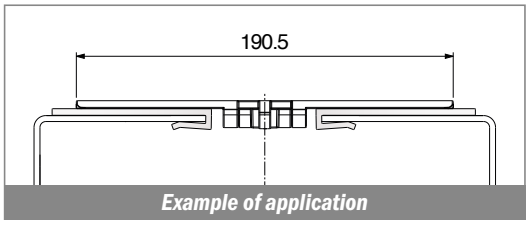

Example of application

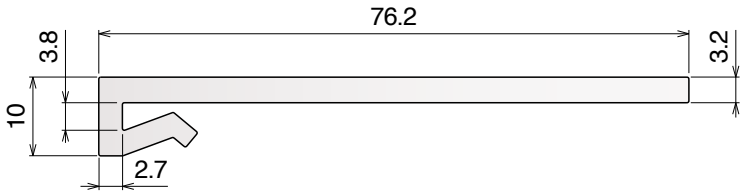


1034


Profilo J-Leg 76.2 / *J-Leg Profile 76.2 / J Profil 76.2*

Fit on 3 mm


North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1034	103403C	3 m	white	On request	3 m bars
1034	103403	6 m	white	On request	6 m bars

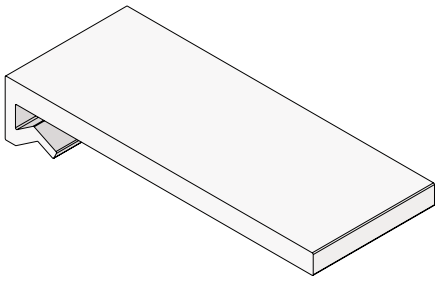

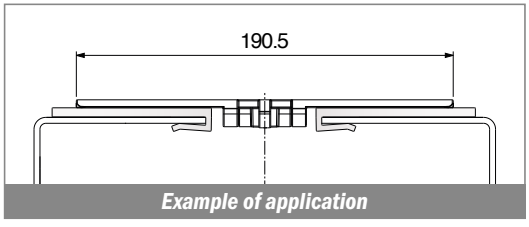

Example of application

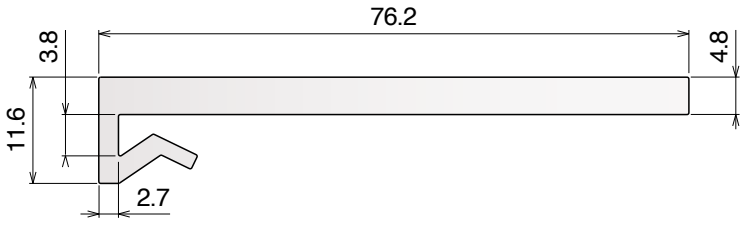

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1035


Profilo J-Leg 73 / *J-Leg Profile 73 / J Profil 73*

Fit on 3 mm


North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1035	103503C	3 m	white	On request	3 m bars
1035	103503	6 m	white	On request	6 m bars

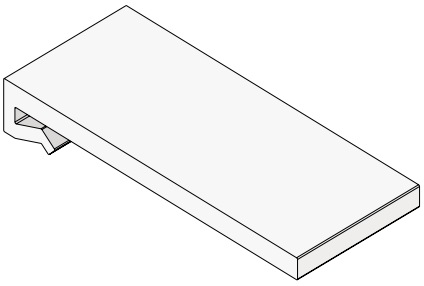

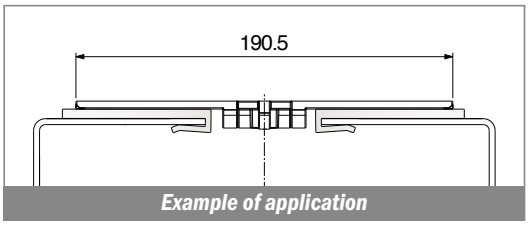

Example of application

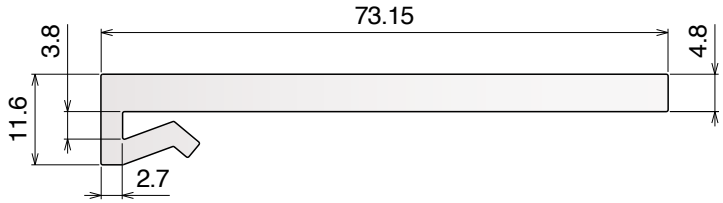



105


Profilo "Z" / *Z-Profile / Z-Profil*

Delivery: Easy Standard On request available in white color

Part	Article-Nr.	A	B	Colour	Availability	Supply
105	10501	20	3	black	Stock item	60 m coils
105	10502	20	3	green	Stock item	60 m coils
105	10503	20	5	black	Stock item	60 m coils
105	10504	20	5	green	Stock item	60 m coils
105	10595	25	3	green	Stock item	60 m coils
105	10592	30	3	green	On request	60 m coils
105	10594	30	5	green	On request	60 m coils
105	10596	40	3	green	Stock item	60 m coils
105	10597	50	3	green	On request	60 m coils
105	10505	60	3	black	Stock item	60 m coils
105	10506	60	3	green	Stock item	60 m coils
105	10507	70	3	black	Stock item	60 m coils
105	10508	70	3	green	Stock item	60 m coils
105	10509	100	3	black	On request	60 m coils
105	10510	100	3	green	Stock item	60 m coils





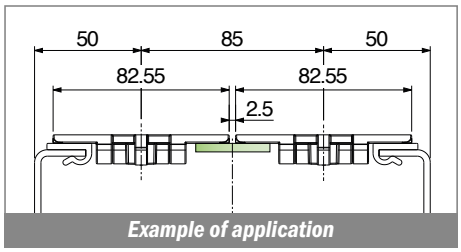


Example of application


106


Profilo guida catena / *Flat profile with nose / Flachprofil mit Nase*

On request available in white color

Part	Article-Nr.	Colour	Availability	Supply
106	10601	black	Stock item	60 m coils
106	10602	green	Stock item	60 m coils



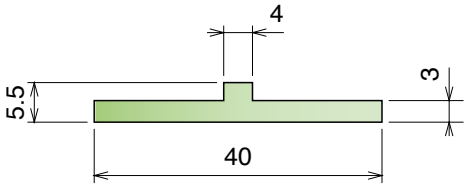

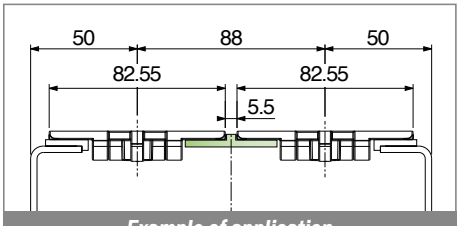

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


107

Profilo guida catena / *Wear strip / Rückführleiste*

Delivery: Easy | Standard | On request available in white color


Part	Article-Nr.	Colour	Availability	Supply
107	10701	black	Stock item	60 m coils
107	10702	green	Stock item	60 m coils





Supports Available:
PART 230-231
Pag 358



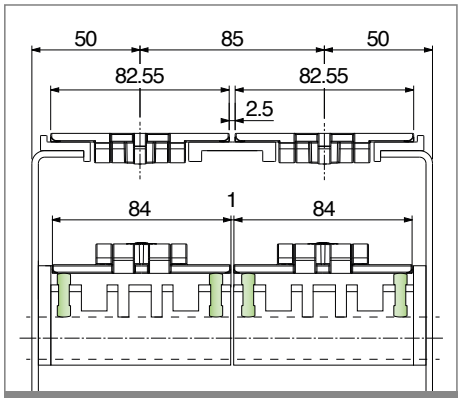


Example of application


108


Profilo T / *T-profile / T-Profil*

Delivery: Easy | Standard | On request available in white color

Part	Article-Nr.	L	Colour	Availability	Supply
108	10801C	3 m	black	Stock item	3 m bars
108	10801	6 m	black	On request	6 m bars
108	10802C	3 m	green	Stock item	3 m bars
108	10802	6 m	green	On request	6 m bars



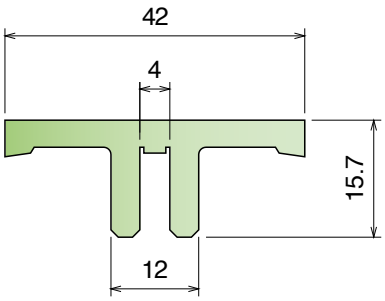

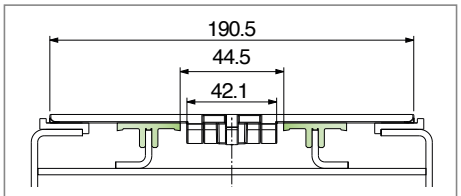

Ideal as intermediate plate support for wide chains.


Example of application


109


Profilo clip-on guida catena / *Flat clip-on wear strip / U-Profil Clip-on*

Delivery: Easy | Standard

Part	Article-Nr.	L	Colour	Availability	Supply
109	10901C	3 m	black	Stock item	3 m bars
109	10901	6 m	black	On request	6 m bars
109	10902C	3 m	green	Stock item	3 m bars
109	10902	6 m	green	On request	6 m bars
109	10903C	3 m	white	Stock item	3 m bars
109	10903	6 m	white	Stock item	6 m bars
109	10901BC	3 m	BluLub	Stock item	3 m bars
109	10901B	6 m	BluLub	On request	6 m bars
109	10901B-30	30 m	BluLub	On request	30 m colis



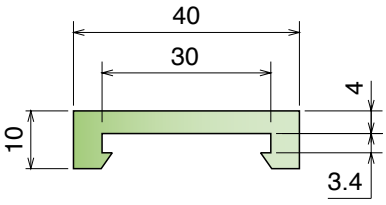

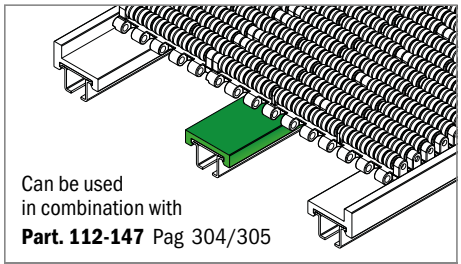

Can be used
in combination with
Part. 112-147 Pag 304/305

Example of application

110-156-112


Guide estruse / *Extruded profiles / Extrudiertes profil*


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)

110


Profilo clip-on guida catena con bordo / *Flat clip-on wear strip with nose / U-Profil Clip-on mit Nase*

On request available in white color



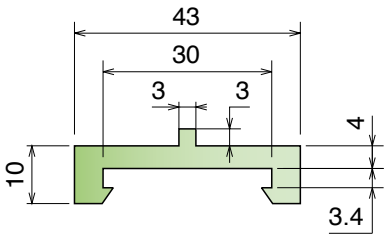

Part	Article-Nr.	L	Colour	Availability	Supply
110	11001C	3 m	black	Stock item	3 m bars
110	11001	6 m	black	On request	6 m bars
110	11002C	3 m	green	Stock item	3 m bars
110	11002	6 m	green	On request	6 m bars

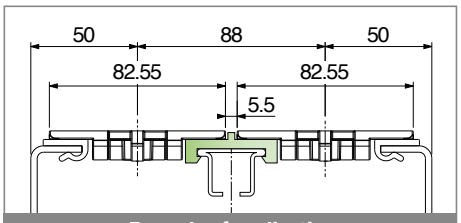



Example of application

156


Profilo clip-on guida tappeto / *Clip-on wear strip for belt / Clip-on m. Seitenführung*


Delivery: Easy Standard — On request available in white color



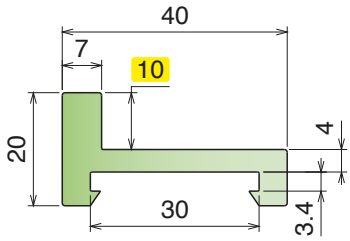


Part	Article-Nr.	L	Colour	Availability	Supply
156	15601C	3 m	black	Stock item	3 m bars
156	15601	6 m	black	On request	6 m bars
156	15602C	3 m	green	Stock item	3 m bars
156	15602	6 m	green	On request	6 m bars



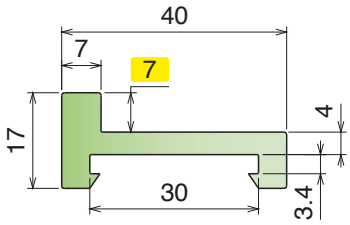

Part	Article-Nr.	L	Colour	Availability	Supply
156	15699C	3 m	green	On request	3 m bars

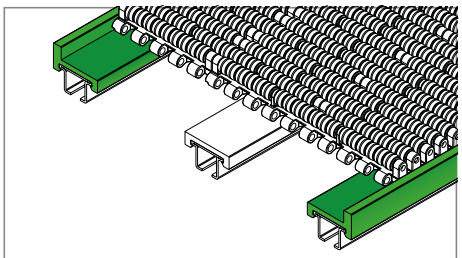



Example of application

112


Profilo / *Profile / Profil*

Delivery: Easy Standard





Part	Article-Nr.	L	Material	Availability	Supply
112	11201C	3 m	AISI 304	Stock item	3 m bars
112	11201	6 m	AISI 304	On request	6 m bars
112	11202C	3 m	AISI 430	Stock item	3 m bars
112	11202	6 m	AISI 430	On request	6 m bars

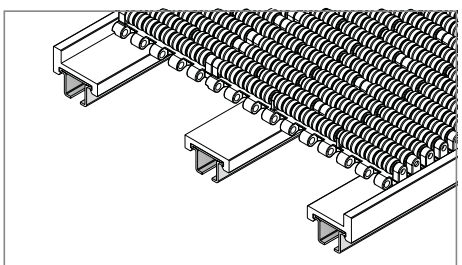

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


147


Profilo in alluminio / *Aluminum profile / Aluminium-Profil*

Delivery: Easy Standard

Part	Article-Nr.	L	Material	Availability	Supply
147	14701C	3 m	Aluminium	Stock item	3 m bars
147	14701	6 m	Aluminium	On request	6 m bars





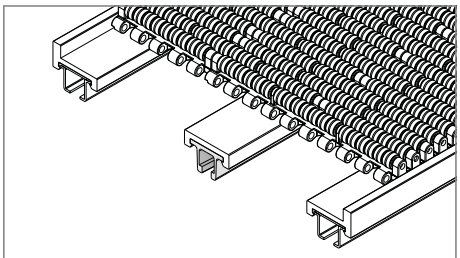

Example of application


133


Profilo assemblato clip-on / *Profile assembled clip-on / Profile montiert clip-on*

Delivery: Easy Standard On request available in white color

Part	Article-Nr.	L	Material	Colour	Availability	Supply
133	13301C	3 m	AISI 304	green	Stock item	3 m bars
133	13301	6 m	AISI 304	green	On request	6 m bars
133	13302C	3 m	AISI 430	green	Stock item	3 m bars
133	13302	6 m	AISI 430	green	On request	6 m bars
133	13303C	3 m	AISI 304	black	Stock item	3 m bars
133	13303	6 m	AISI 304	black	On request	6 m bars
133	13304C	3 m	AISI 430	black	Stock item	3 m bars
133	13304	6 m	AISI 430	black	On request	6 m bars
133	13305BC	3 m	AISI 304	BluLub	Stock item	3 m bars
133	13305B	6 m	AISI 304	BluLub	On request	6 m bars
133	13306BC	3 m	AISI 430	BluLub	Stock item	3 m bars
133	13306B	6 m	AISI 430	BluLub	On request	6 m bars





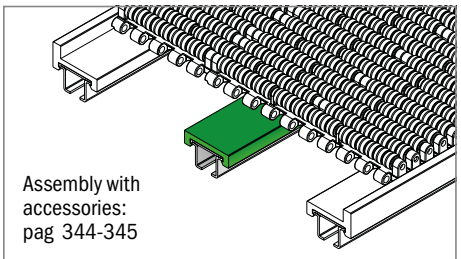

Assembly with accessories: pag 344-345
Example of application


148


Profilo assemblato clip-on / *Profile assembled clip-on / Profile montiert clip-on*

Delivery: Easy Standard

Part	Article-Nr.	L	Material	Colour	Availability	Supply
148	14801C	3 m	Aluminium	green	Stock item	3 m bars
148	14801	6 m	Aluminium	green	On request	6 m bars
148	14801BC	3 m	Aluminium	BluLub	Stock item	3 m bars
148	14801B	6 m	Aluminium	BluLub	On request	6 m bars
148	14802C	3 m	Aluminium	black	Stock item	3 m bars
148	14802	6 m	Aluminium	black	On request	6 m bars
148	14803C	3 m	Aluminium	white	Stock item	3 m bars





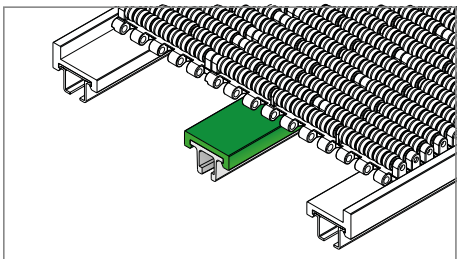
Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


157


Profilo guida tappeto assemblato / *Wear strip assembled for belt / Gleitleiste für mattenketten kpl montiert*

Delivery: Easy | Standard | On request available in white color

Part	Article-Nr.	L	Material	Colour	Availability	Supply
157	15701C	3 m	AISI 304	green	Stock item	3 m bars
157	15701	6 m	AISI 304	green	On request	6 m bars
157	15702C	3 m	AISI 430	green	Stock item	3 m bars
157	15702	6 m	AISI 430	green	On request	6 m bars




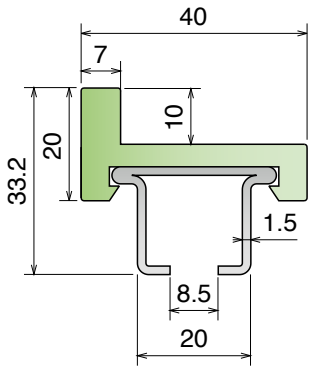


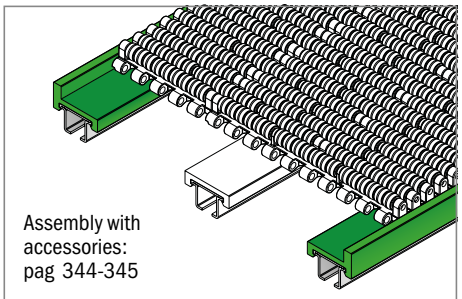


Example of application

Part	Article-Nr.	L	Material	Colour	Availability	Supply
157	15799C	3 m	AISI 304	green	On request	3 m bars



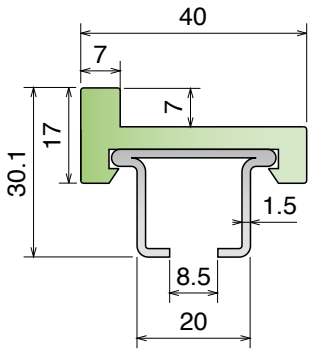

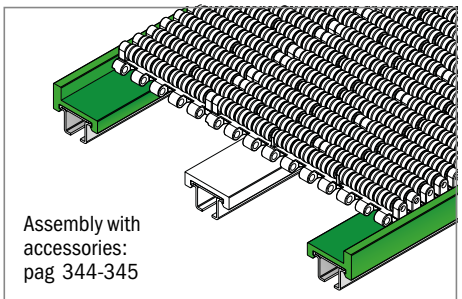


Example of application


118


Profilo Delta / *D-Profile / D-Profil*

Delivery: Easy | Standard

Part	Article-Nr.	L	Material	Availability	Supply
118	11801C	3 m	AISI 304	Stock item	3 m bars
118	11801	6 m	AISI 304	On request	6 m bars
118	11802C	3 m	AISI 430	Stock item	3 m bars
118	11802	6 m	AISI 430	On request	6 m bars





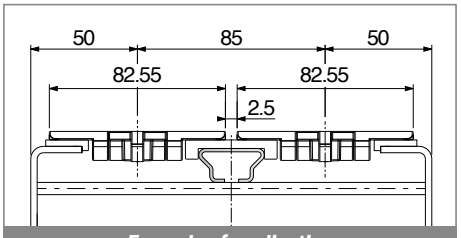


Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)

149


Profilo ad "U" con bordo */U-profile with nose / U-Profil mit Nase*

On request available in white color | Coils available



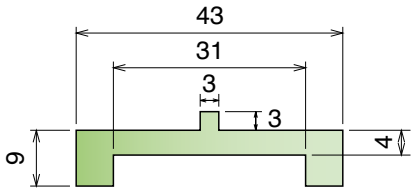

Part	Article-Nr.	L	Colour	Availability	Supply
149	14950C	3 m	black	Stock item	3 m bars
149	14950	6 m	black	On request	6 m bars
149	14952C	3 m	green	Stock item	3 m bars
149	14952	6 m	green	On request	6 m bars

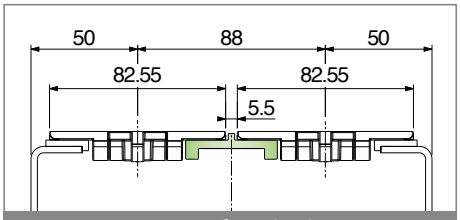



Example of application

177


Profilo ad "U" */ U-profile / U-Profil*

Delivery: Easy Standard | On request available in white color



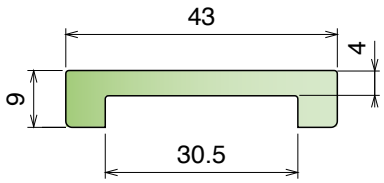

Part	Article-Nr.	L	Colour	Availability	Supply
177	17701C	3 m	black	Stock item	3 m bars
177	17701	6 m	black	On request	6 m bars
177	17702C	3 m	green	Stock item	3 m bars
177	17702	6 m	green	On request	6 m bars
177	17701BC	3 m	BluLub	Stock item	3 m bars
177	17701B	6 m	BluLub	On request	6 m bars
177	17702-30	30 m	green	On request	30 m coils

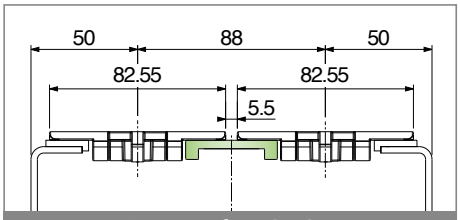



Example of application

1059


Profilo ad "U" */ U-profile / U-Profil*

Delivery: Easy Standard | On request available in white color
Coils available



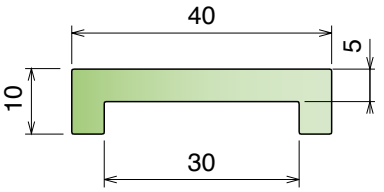

Part	Article-Nr.	L	Colour	Availability	Supply
1059	105901C	3 m	black	Stock item	3 m bars
1059	105901	6 m	black	On request	6 m bars
1059	105902C	3 m	green	Stock item	3 m bars
1059	105902	6 m	green	On request	6 m bars
1059	105901BC	3 m	BluLub	Stock item	3 m bars
1059	105901B	6 m	BluLub	On request	6 m bars

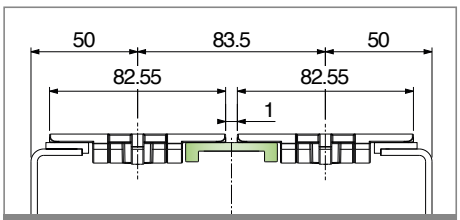


Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)

178


Profilo ad "U" / *U-profile / U-Profil*

Delivery: Easy | Standard | On request available in white color | Coils available



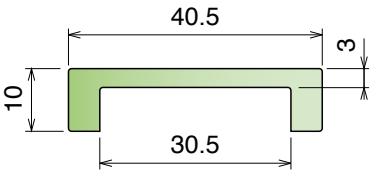

Part	Article-Nr.	L	Colour	Availability	Supply
178	17801C	3 m	black	Stock item	3 m bars
178	17801	6 m	black	On request	6 m bars
178	17802C	3 m	green	Stock item	3 m bars
178	17802	6 m	green	On request	6 m bars
178	17801BC	3 m	BluLub	Stock item	3 m bars
178	17801B	6 m	BluLub	On request	6 m bars

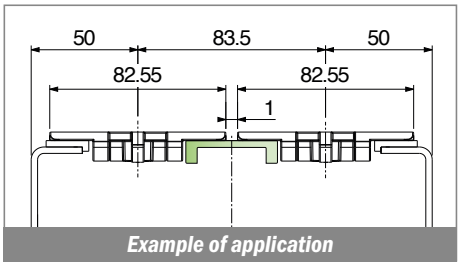



Example of application

111


Profilo ad "U" / *U-profile / U-Profil*

Delivery: Easy | Standard | On request available in white color



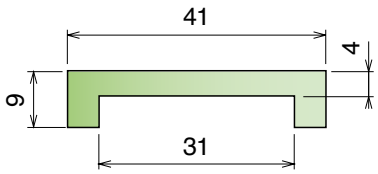

Part	Article-Nr.	L	Colour	Availability	Supply
111	11101C	3 m	black	Stock item	3 m bars
111	11101	6 m	black	On request	6 m bars
111	11102C	3 m	green	Stock item	3 m bars
111	11102	6 m	green	On request	6 m bars
111	11101-60	60 m	black	On request	60 m coils
111	11102-60	60 m	green	On request	60 m coils
111	11101BC	3 m	BluLub	Stock item	3 m bars
111	11101B	6 m	BluLub	On request	6 m bars

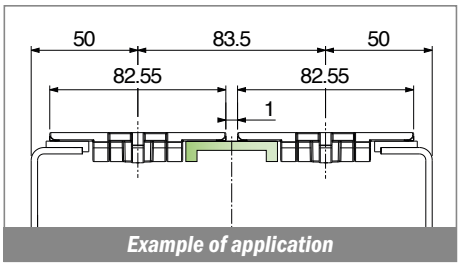



Example of application

1060


Profilo ad "U" / *U-profile / U-Profil*

Delivery: Easy | Standard | On request available in white color
Coils available

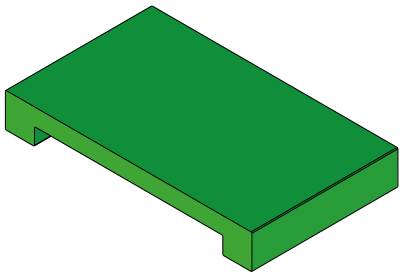

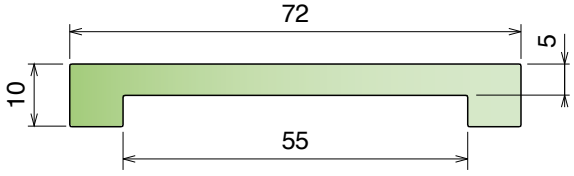

Part	Article-Nr.	L	Colour	Availability	Supply
1060	106001C	3 m	black	Stock item	3 m bars
1060	106001	6 m	black	On request	6 m bars
1060	106002C	3 m	green	Stock item	3 m bars
1060	106002	6 m	green	On request	6 m bars

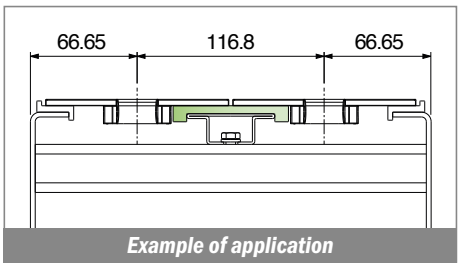

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


199


Profilo ad "U" / *U-profile / U-Profil*

On request available in white color | Coils available

Part	Article-Nr.	L	Colour	Availability	Supply
199	19976	6 m	white	On request	6 m bars

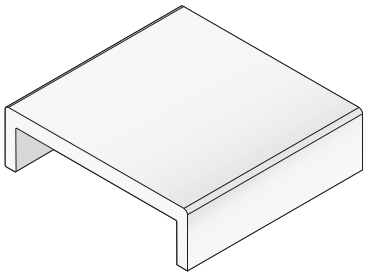

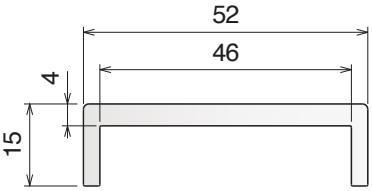

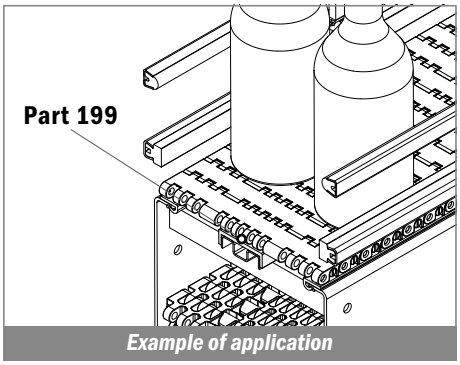


Example of application


U-Profile

Profilo ad "U" *42 mm/ U-profile 42 mm/ U-Profil 42 mm*

On request available in white color


Part	Article-Nr.	L	Colour	Availability	Supply
199	19944B-30	30 m	BluLub	On request	30 m bars




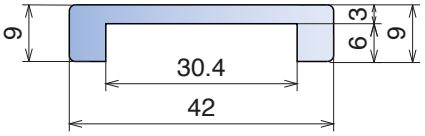


Staggered version


Part	Article-Nr.	L	Colour	Availability	Supply
199	19945-30	30 m	black	Stock item	30 m bars
199	19945B-30	30 m	BluLub	Stock item	30 m bars
199	19946-30	30 m	green	Stock item	30 m bars



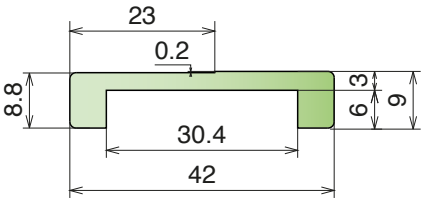

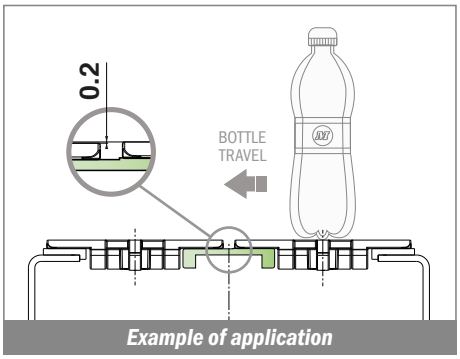

Example of application

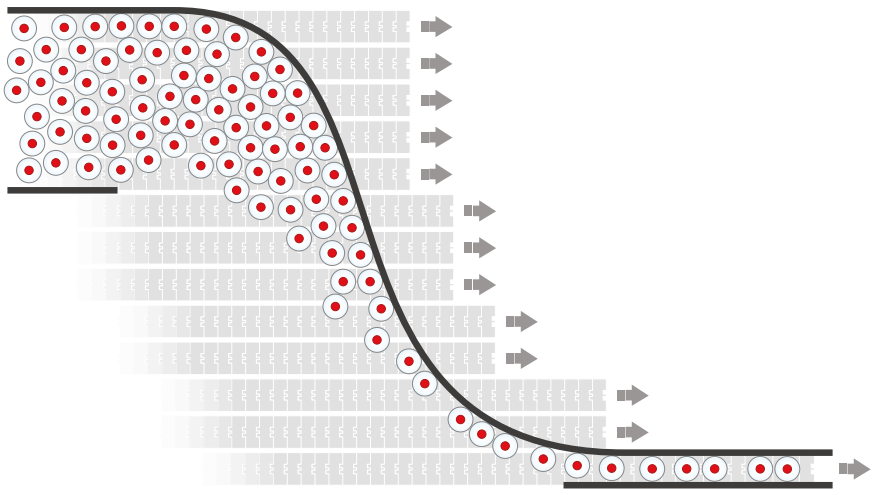



Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


180

Copri profilo / *Bar cover / Abdeckprofil*

Part	Article-Nr.	L	Colour	Availability	Supply
180	18003C	3 m	white	Stock item	3 m bars
180	18003	6 m	white	On request	6 m bars



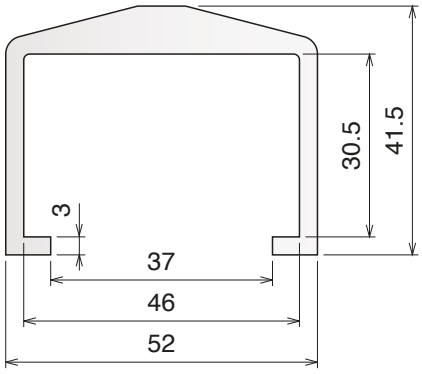

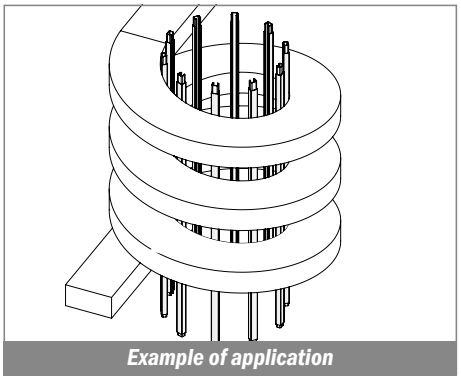

Example of application


181


Copri profilo 25.4 x 25.4 / *Bar cover 25.4 x 25.4 / Abdeckprofil 25.4 x 25.4*

Fit on 25.4 x 25.4 mm

Part	Article-Nr.	L	Colour	Availability	Supply
181	18103C	3 m	white	Stock item	3 m bars
181	18103	6 m	white	On request	6 m bars





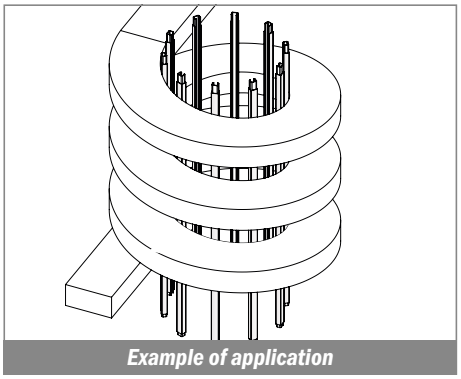

Example of application


1052


Copri profilo 38.1 x 50.8 / *Bar cover 38.1 x 50.8 / Abdeckprofil 38.1 x 50.8*

Fit on 38.1 x 50.8 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1052	105203C	3 m	white	Stock item	3 m bars
1052	105203	6 m	white	On request	6 m bars



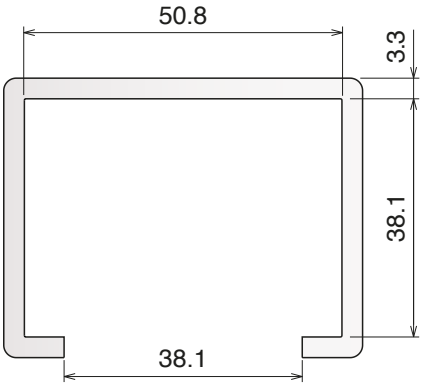

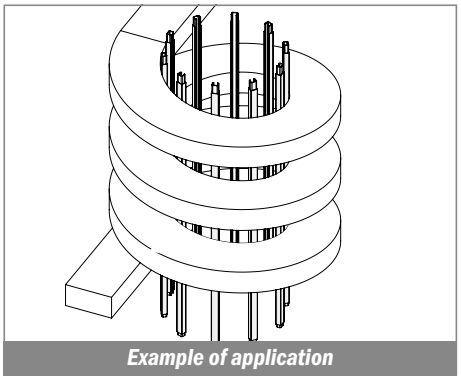
Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1000


Copri profilo 1.5 mm / *Bar cap 1.5 mm / Abdeckprofil 1.5 mm*

Fit on 1.5 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1000	100003-30	30 m	white	On request	30 m coils





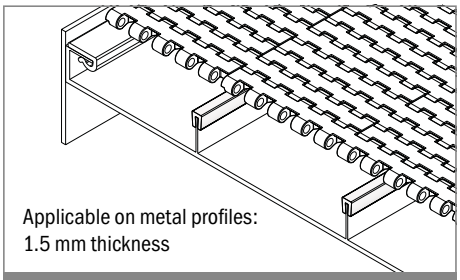

Applicable on metal profiles:
1.5 mm thickness
Example of application


1001


Copri profilo 1.5 mm / *Bar cap 1.5 mm / Abdeckprofil 1.5 mm*

Fit on 1.5 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1001	100103-30	30 m	white	On request	30 m coils





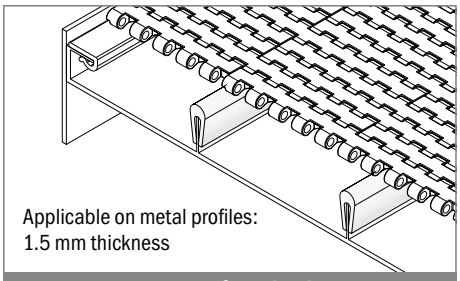

Applicable on metal profiles:
1.5 mm thickness
Example of application


1002


Copri profilo 3 mm / *Bar cap 3 mm / Abdeckprofil 3 mm*

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1002	100203-30	30 m	white	On request	30 m coils





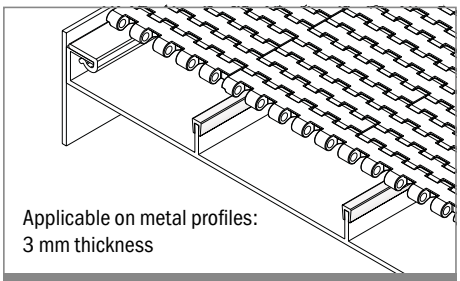

Applicable on metal profiles:
3 mm thickness
Example of application


1003


Copri profilo 3 mm / *Bar cap 3 mm / Abdeckprofil 3 mm*

Delivery: Easy Standard | Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1003	100303-30	30 m	white	On request	30 m coils





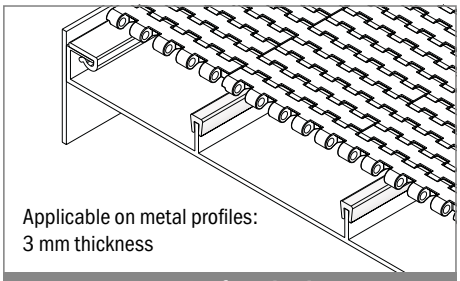
Applicable on metal profiles:
3 mm thickness
Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1004


Copri profilo 3 mm / *Bar cap 3 mm / Abdeckprofil 3 mm*

Delivery: Easy Standard | Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1004	100403-30	30 m	white	On request	30 m coils





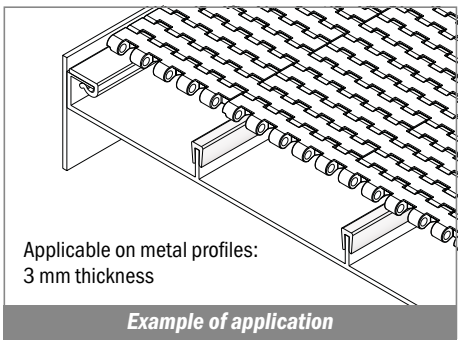


Example of application


1006


Copri profilo 5 mm / *Bar cap 5 mm / Abdeckprofil 5 mm*

Fit on 5 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1006	100603-30	30 m	white	On request	30 m coils





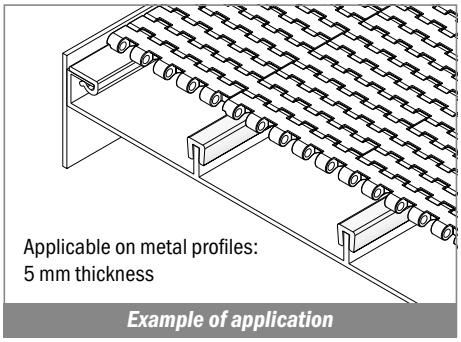


Example of application


153


Copri profilo 5 mm / *Bar cap 5 mm / Abdeckprofil 5 mm*

Delivery: Easy Standard | Fit on 4/5 mm

Part	Article-Nr.	L	Colour	Availability	Supply
153	15302	6 m	green	On request	30 m coils
153	15302C	3 m	green	On request	3 m bars
153	15303	6 m	white	On request	6 m bars
153	15303-30	30 m	white	Stock item	30 m coils
153	15300	6 m	BluLub	Stock item	6 m bars
153	15300-30	30 m	BluLub	Stock item	30 m coils
153	15300C	3 m	BluLub	On request	3 m bars



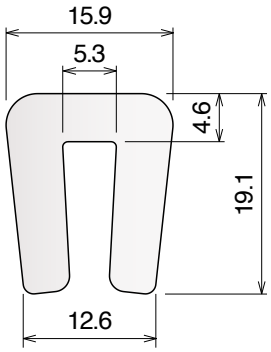

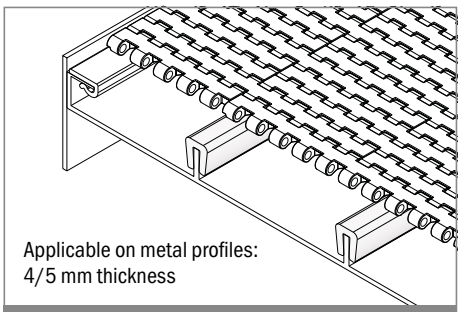

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1007


Copri profilo 5 mm / *Bar cap 5 mm / Abdeckprofil 5 mm*

Fit on 5 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1007	100703	6 m	white	On request	6 m bars
1007	100703B	6 m	BluLub	On request	6 m bars



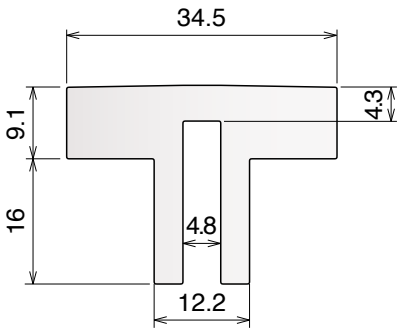

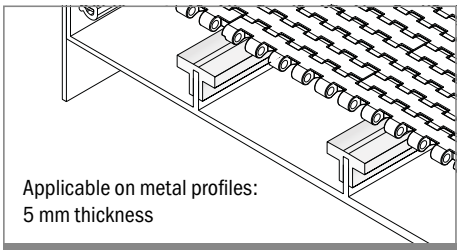


Example of application


1008


Copri profilo 5 mm / *Bar cap 5 mm / Abdeckprofil 5 mm*

Fit on 5 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1008	100803	6 m	white	On request	6 m bars
1008	100803B	6 m	BluLub	On request	6 m bars



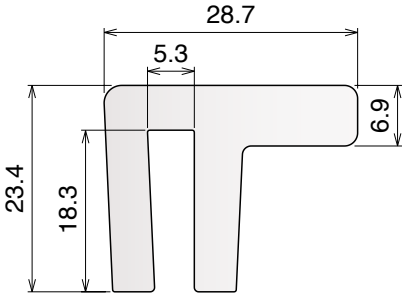

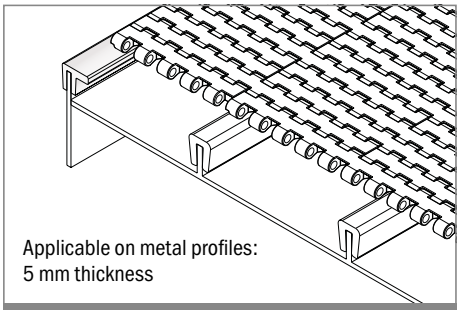


Example of application


1009


Copri profilo 6 mm / *Bar cap 6 mm / Abdeckprofil 6 mm*

Delivery: Easy **Standard** Fit on 6 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1009	100903-30	30 m	white	On request	30 m coils





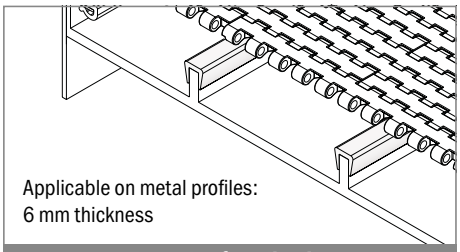


Example of application


1010


Copri profilo 6 mm / *Bar cap 6 mm / Abdeckprofil 6 mm*

Fit on 6 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1010	101003-30	30 m	white	On request	30 m coils





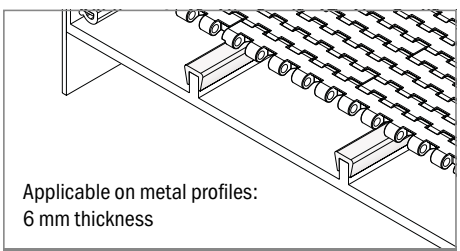

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1011


Copri profilo 10 mm / *Bar cap 10 mm / Abdeckprofil 10 mm*

Fit on 10 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1011	101103-30	30 m	white	On request	30 m coils
1011	101103-60	60 m	white	On request	60 m coils





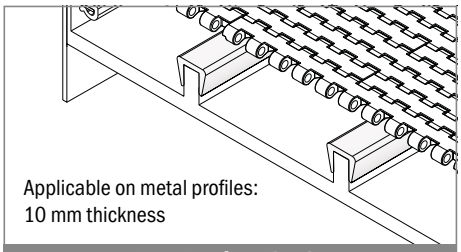


Example of application


1012


Copri profilo 12-13 mm / *Bar cap 12-13 mm / Abdeckprofil 12-13 mm*

Fit on 12/13 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1012	101203-30	30 m	white	On request	30 m coils





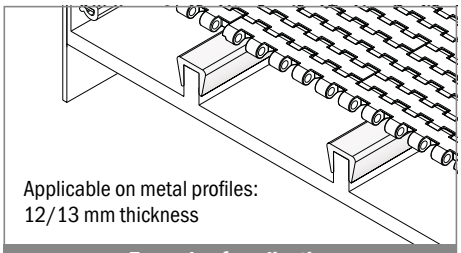


Example of application


1013


Copri profilo 10 mm / *Bar cap 10 mm / Abdeckprofil 10 mm*

Fit on 10 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1013	101303	6 m	white	On request	6 m coils





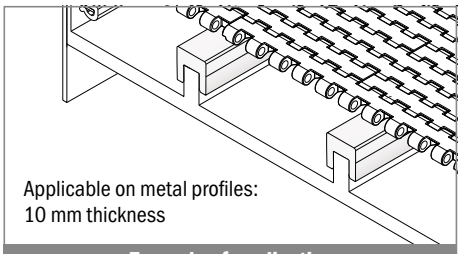


Example of application


1040


Guide tappeto / *Belt side guide / Seitentükuung für matterkette*

Fit on 3 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1040	104003C	3 m	white	On request	3 m bars
1040	104003	6 m	white	On request	6 m bars



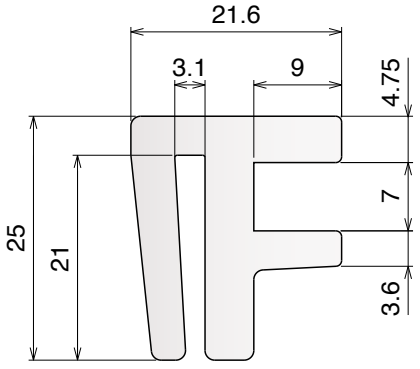

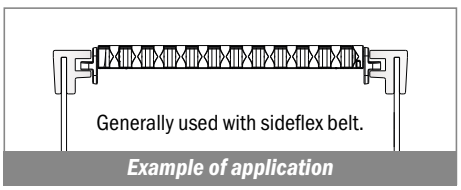



Example of application

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


119 Guida conica tonda / *Guide rail round / konische Führung rund*

Delivery: Easy Standard Supply: 3/6 m bars






Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
119	11963	3 m	1.9	AISI 304	white	Stock item	
119	11967	6 m	1.9	AISI 304	white	On request	
119	11963B	3 m	1.9	AISI 304	BluLub	On request	
119	11967B	6 m	1.9	AISI 304	BluLub	On request	
119	11901C	3 m	1.5	AISI 304	white	Stock item	
119	11901	6 m	1.5	AISI 304	white	Stock item	
119	11901BC	3 m	1.5	AISI 304	BluLub	Stock item	
119	11901B	6 m	1.5	AISI 304	BluLub	Stock item	

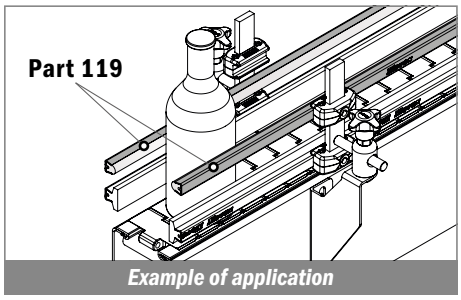


Example of application


120 Guida conica semitonda / *Guide rail modified / konische Führung halbrund*

Delivery: Easy Standard Supply: 3/6 m bars






Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
120	12063	3 m	1.9	AISI 304	white	Stock item	
120	12067	6 m	1.9	AISI 304	white	On request	
120	12063B	3 m	1.9	AISI 304	BluLub	On request	
120	12067B	6 m	1.9	AISI 304	BluLub	On request	
120	12001C	3 m	1.5	AISI 304	white	Stock item	
120	12001	6 m	1.5	AISI 304	white	Stock item	
120	12001BC	3 m	1.5	AISI 304	BluLub	Stock item	
120	12001B	6 m	1.5	AISI 304	BluLub	Stock item	

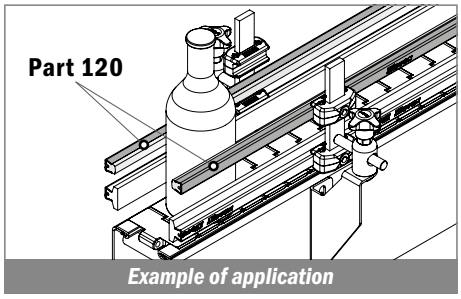


Example of application


121 Guida conica piatta / *Guide rail flat / konische Führung flach*

Delivery: Easy Standard Supply: 3/6 m bars





Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
121	12163	3 m	1.9	AISI 304	white	On request	
121	12167	6 m	1.9	AISI 304	white	On request	
121	12163B	3 m	1.9	AISI 304	BluLub	On request	
121	12167B	6 m	1.9	AISI 304	BluLub	On request	
121	12101C	3 m	1.5	AISI 304	white	Stock item	
121	12101	6 m	1.5	AISI 304	white	Stock item	
121	12101BC	3 m	1.5	AISI 304	BluLub	Stock item	
121	12101B	6 m	1.5	AISI 304	BluLub	Stock item	

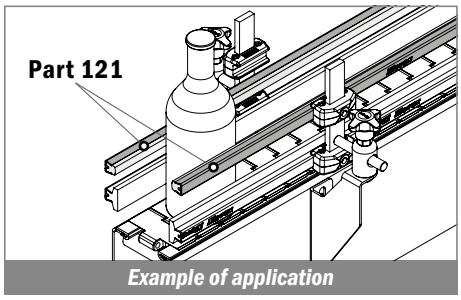

Example of application


Material:
Metal profile: Stainless steel
Plastic profile: UHMW-PE


152


Guida conica 25° / *Guide rail 25° / konische Führung 25°*

Delivery: Easy Standard Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
152	15263	3 m	1.9	AISI 304	white	On request	
152	15201C	3 m	1.5	AISI 304	white	Stock item	





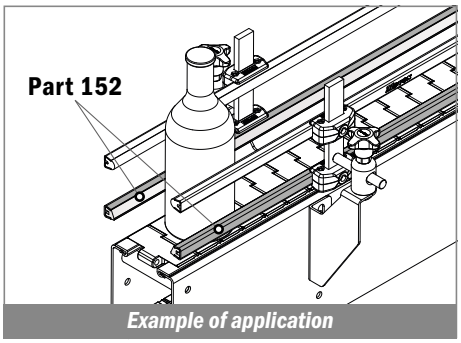


Example of application


1067


Guida conica H 18 / *Guide rail H 18 / konische Führung H 18*

Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
1067	106763	3 m	1.9	AISI 304	white	On request	
1067	106701C	3 m	1.5	AISI 304	white	On request	





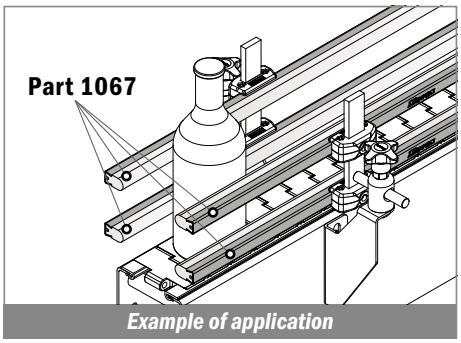


Example of application


122


Guida conica profilo a T 25,4 mm / *Guide rail T-shape 25,4 mm / konische Führung flach (T) 25,4 mm*

Delivery: Easy Standard Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
122	12263	3 m	1.9	AISI 304	white	Stock item	
122	12201C	3 m	1.5	AISI 304	white	Stock item	





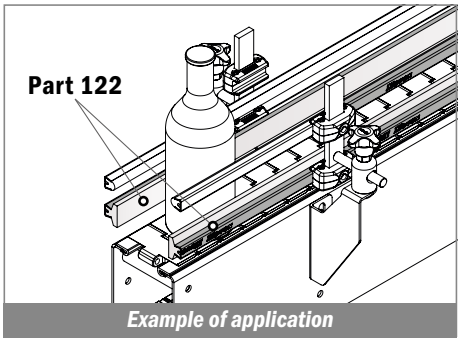

Example of application


Material:
Metal profile: Stainless steel
Plastic profile: UHMW-PE


123


Guida conica profilo a T 31,75 mm / *Guide rail T-shape 31,75 mm / konische Führung flach (T) 31,75 mm*

Delivery: Easy Standard | Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
123	12363	3 m	1.9	AISI 304	white	Stock item	
123	12301C	3 m	1.5	AISI 304	white	Stock item	





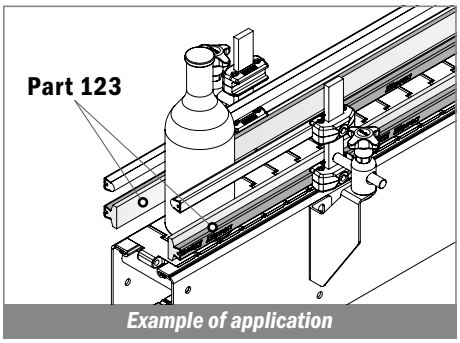


Example of application


140


Guida conica profilo a T 25,4 mm / *Guide rail T-shape 25,4 mm / konische Führung flach (T) 25,4 mm*

Delivery: Easy Standard | Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
140	14063	3 m	1.9	AISI 304	white	Stock item	
140	14001C	3 m	1.5	AISI 304	white	Stock item	





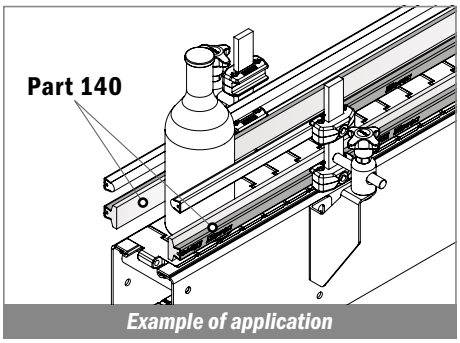


Example of application


146


Guida conica profilo a T 31,75 mm / *Guide rail T-shape 31,75 mm / konische Führung flach (T) 31,75 mm*

Delivery: Easy Standard | Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
146	14663	3 m	1.9	AISI 304	white	On request	
146	14601C	3 m	1.5	AISI 304	white	Stock item	





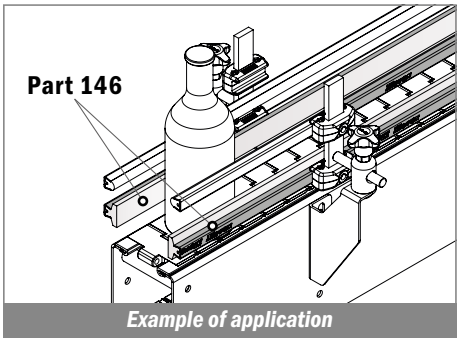

Example of application


Material:
Metal profile: Stainless steel
Plastic profile: UHMW-PE


124


Guida conica profilo a T 40 mm / *Guide rail T-shape 40 mm / konische Führung flach (T) 40 mm*

Delivery: Easy Standard Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
124	12463	3 m	1.9	AISI 304	white	On request	
124	12401C	3 m	1.5	AISI 304	white	Stock item	





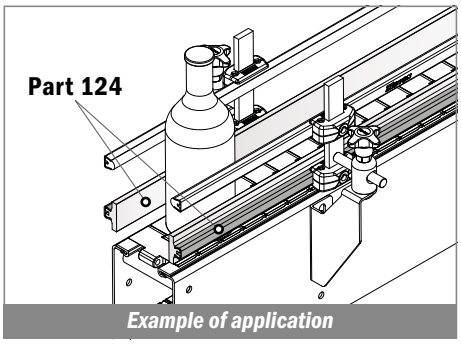


Example of application


143


Guida conica profilo a "T" 19,05 mm / *Guide rail T-shape 19,05 mm / konische Führung flach (T) 19,05 mm*

Delivery: Easy Standard Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
143	14363	3 m	1.9	AISI 304	white	On request	
143	14301C	3 m	1.5	AISI 304	white	Stock item	





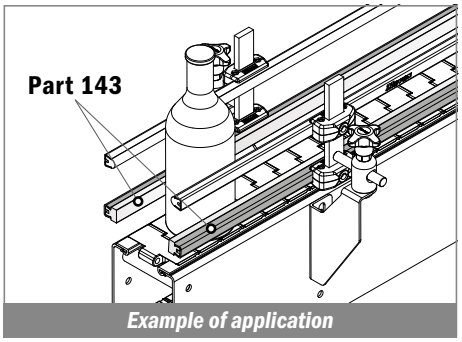


Example of application


141


Guida conica profilo a "T" 57,15 mm / *Guide rail T-shape 57,15 mm / konische Führung flach (T) 57,15 mm*

Delivery: Easy Standard Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
141	14163	3 m	1.9	AISI 304	white	On request	
141	14101C	3 m	1.5	AISI 304	white	Stock item	



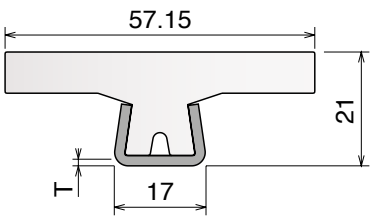

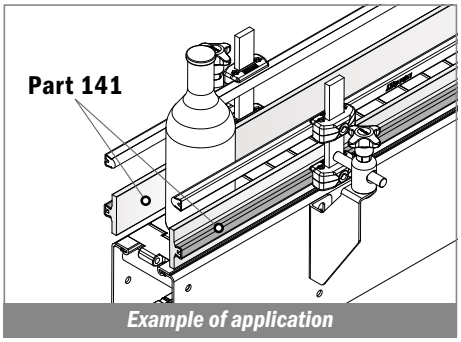


Example of application


Material:
Metal profile: Stainless steel
Plastic profile: UHMW-PE


142 Guida conica profilo a "T" 43,2 mm / *Guide rail T-shape 43,2 mm / konische Führung flach (T) 43,2 mm*

Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
142	14263	3 m	1.9	AISI 304	white	On request	
142	14201C	3 m	1.5	AISI 304	white	Stock item	





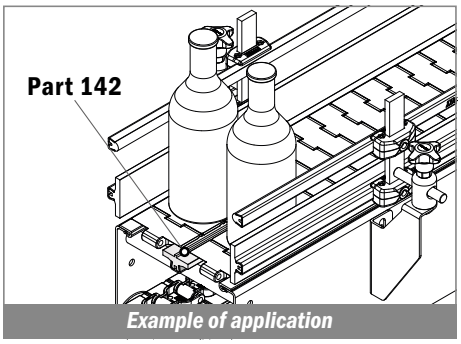



Example of application

125 Guida conica profilo a "L" 31,75 mm / *Guide rail L-shape 31,75 mm / konische Führung flach (L) 31,75 mm*


Delivery: Easy Standard — Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
125	12563	3 m	1.9	AISI 304	white	Stock item	
125	12501C	3 m	1.5	AISI 304	white	Stock item	






PART **12563**



PART **12501C**

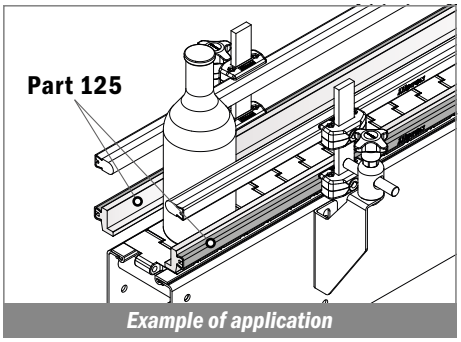



Example of application

144 Guida conica profilo a "L" 31,75 mm / *Guide rail L-shape 31,75 mm / konische Führung flach (L) 31,75 mm*


Delivery: Easy Standard — Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
144	14463	3 m	1.9	AISI 304	white	Stock item	
144	14401C	3 m	1.5	AISI 304	white	Stock item	






PART **14463**



PART **14401C**

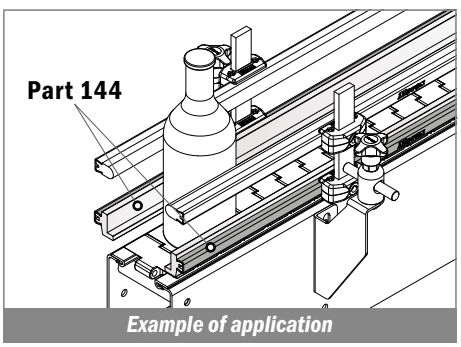


Example of application


Material:
Metal profile: Stainless steel
Plastic profile: UHMW-PE


184 Guida conica per catena / *Guide rail for chain / konische Führung*

Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability	Type
184	18463	3 m	1.9	AISI 304	white	On request	
184	18401C	3 m	1.5	AISI 304	white	Stock item	





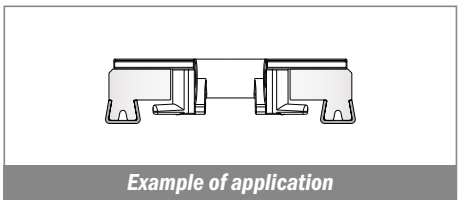



Example of application


191 Guida conica per catena / *Guide rail for chain / konische Führung*

Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Colour	Availability
191	19101C	3 m	1.9	AISI 304	white	On request





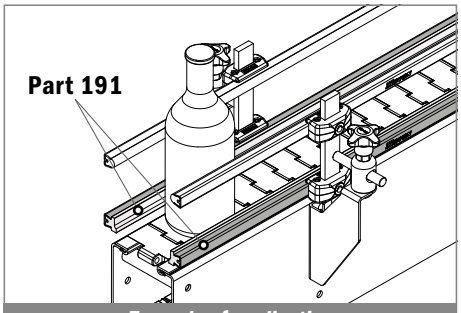



Example of application


145 Guida tappeto / *Belt side guide / Seitenführung für Mattenkette*

Supply: 3 m bars

Part	Article-Nr.	L	T	Metal profile	Material	Availability	Type
145	14563	3 m	1.9	AISI 304	BluLub	On request	
145	14503C	3 m	1.5	AISI 304	BluLub	Stock item	







Bendable profile, generally used with sideflexing belt 600 series.

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


130

Profilo in alluminio / *Aluminum rail for bottle guide / Aluminium profil*


Delivery: Easy | Standard

Part	Article-Nr.	L	Material	Type	Availability	Supply
130	13001C	3 m	Aluminium	A	Stock item	3 m bars
130	13001	6 m	Aluminium	A	On request	6 m bars
130	13002C	3 m	Aluminium	B	On request	3 m bars






Type A



Type B

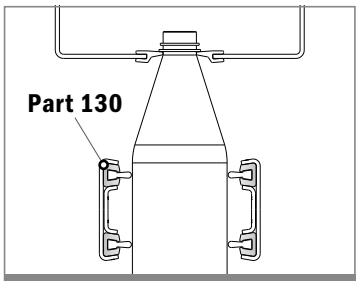


Example of application


188


Profilo in alluminio / *Aluminum rail for bottle guide / Aluminium profil*

Delivery: Easy | Standard

Part	Article-Nr.	L	Material	Availability	Supply
188	18801C	3 m	Aluminium	Stock item	3 m bars
188	18801	6 m	Aluminium	On request	6 m bars





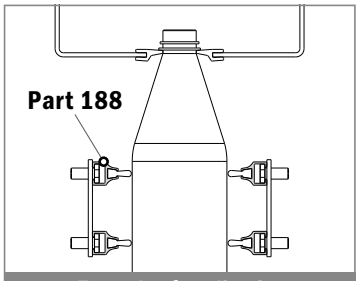


Example of application


131

Profilo guida bottiglia / *Plastic rail for bottle guide / Flaschenführungs profil*


Delivery: Easy | Standard

Part	Article-Nr.	Type	Colour	Availability	Supply
131	13101B	A	BluLub	Stock item	30 m coils
131	13101	A	grey	Stock item	30 m coils
131	13102B	B	BluLub	On request	30 m coils
131	13102	B	grey	On request	30 m coils






Type A



Type B

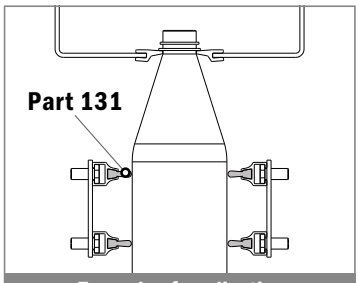

Example of application

199

Macchina curvatrice / *Bending machine / Biegemaschine*

Delivery: Easy | Standard

Part	Article-Nr.
199	19999



Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)

151 Rulli per macchina curvatrice / *Roller for bending machine / Rollen für Biegemaschine*




Internal curve




External curve


Part	Article-Nr.	Suitable for Part.
151	15101	119 - 120 - 121 - 152










Part	Article-Nr.	Suitable for Part.
151	15102	122 - 123 - 124 - 142 - 140 - 146

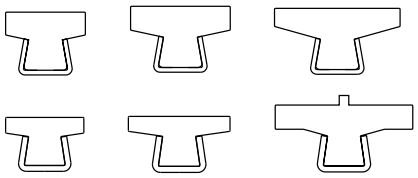








Part	Article-Nr.	Suitable for Part.
151	15103	141










Part	Article-Nr.	Suitable for Part.
151	15104	144









Part	Article-Nr.	Suitable for Part.
151	15105	*for Ø8-Ø10-Ø12 - Ø1/2"-Ø5/8"*







Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)

151 Rulli per macchina curvatrice / *Roller for bending machine / Rollen für Biegemaschine*




Internal curve




External curve

Part	Article-Nr.	Suitable for Part.
151	15109	358










Part	Article-Nr.	Suitable for Part.
151	15110	360










Part	Article-Nr.	Suitable for Part.
151	15106	359









Part	Article-Nr.	Suitable for Part.
151	15107	361









Part	Article-Nr.	Suitable for Part.
151	15108	117









Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. **BluLub®** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*


170

Guida collo / *Neck guide / Nackenführung*

Part	Article-Nr.	L	Material	Availability	Supply
170	17001B	3 m	BluLub	Stock item	3 m bars
170	17002B	6 m	BluLub	On request	6 m bars
170	17000B	30 m	BluLub	On request	30 m coils






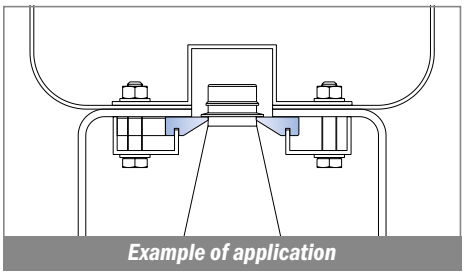

Example of application


168

Guida collo / *Neck guide / Nackenführung*

Part	Article-Nr.	L	Material	Availability	Supply
168	16801B	3 m	BluLub	Stock item	3 m bars
168	16802B	6 m	BluLub	On request	6 m bars
168	16800B	30 m	BluLub	On request	30 m coils






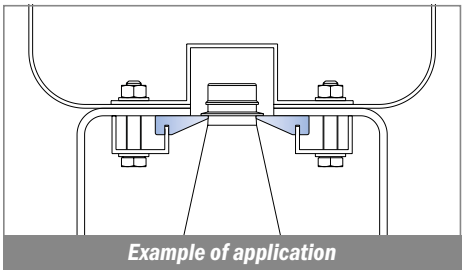

Example of application


169

Guida collo / *Neck guide / Nackenführung*

Part	Article-Nr.	L	Material	Availability	Supply
169	16901B	3 m	BluLub	Stock item	3 m bars
169	16902B	6 m	BluLub	On request	6 m bars
169	16900B	30 m	BluLub	On request	30 m coils

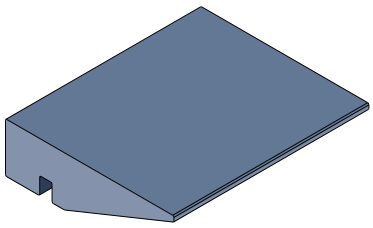



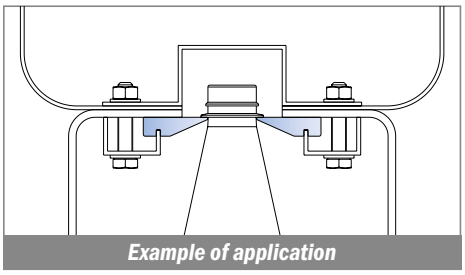

Example of application


1036


Guida collo / *Neck guide / Nackenführung*

Fit on 1.8 - 2 mm

Part	Article-Nr.	L	Material	Availability	Supply
1036	103600B	30 m	BluLub	Stock item	30 m coils





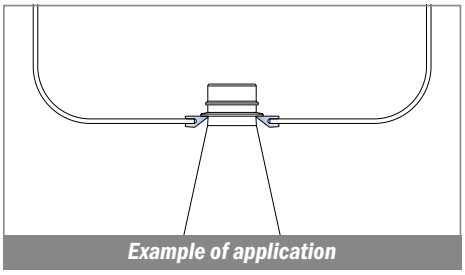
Example of application


Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. ***BluLub*** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*


1037


Guida collo / *Neck guide* / *Nackenführung*

Delivery: Easy | Standard | Fit on 3 mm

Part	Article-Nr.	L	Material	Availability	Supply
1037	103700B	30 m	BluLub	Stock item	30 m coils





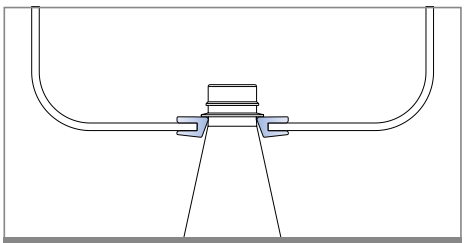

Example of application


167


Guida collo / *Neck guide* / *Nackenführung*

Delivery: Easy | Standard | Fit on 1.8 - 2 mm

Part	Article-Nr.	L	Material	Availability	Supply
167	16700BC	3 m	BluLub	Stock item	3 m bars
167	16700B	6 m	BluLub	Stock item	6 m bars
167	16700B-30	30 m	BluLub	Stock item	30 m coils
167	16700B-75	75 m	BluLub	Stock item	75 m coils





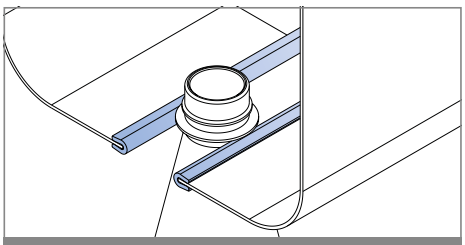

Example of application


171


Guida collo / *Neck guide* / *Nackenführung*

Delivery: Easy | Standard | Fit on 3 mm

Part	Article-Nr.	L	Material	Availability	Supply
171	17100B	30 m	BluLub	Stock item	30 m coils





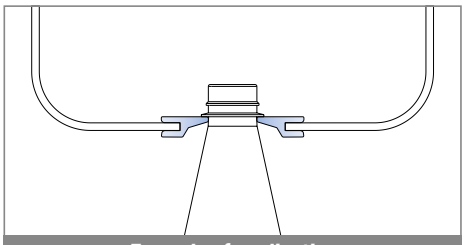

Example of application


172


Guida collo / *Neck guide* / *Nackenführung*

Delivery: Easy | Standard | Fit on 3 mm

Part	Article-Nr.	L	Material	Availability	Supply
172	17200B	30 m	BluLub	Stock item	30 m coils





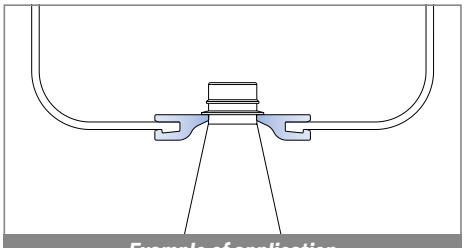
Example of application

173-192-1062-1072

Guide estruse / *Extruded profiles / Extrudiertes profil*


Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. **BluLub®** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*


173


Guida collo / *Neck guide / Nackenführung*

Delivery: Easy Standard | Fit on 1.8 - 2 mm

Part	Article-Nr.	L	Material	Availability	Supply
173	17300B	30 m	BluLub	Stock item	30 m coils





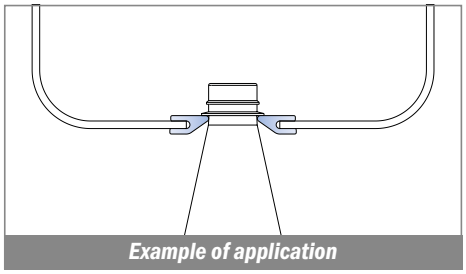



192


Guida collo / *Neck guide / Nackenführung*

Fit on 1.8 - 2 mm

Part	Article-Nr.	L	Material	Availability	Supply
192	19200B	30 m	BluLub	Stock item	30 m coils





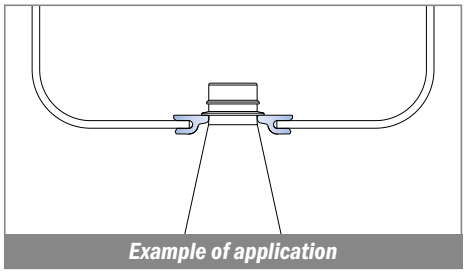



1062


Guida collo / *Neck guide / Nackenführung*

Delivery: Easy Standard | Fit on 1.8 - 2 mm

Part	Article-Nr.	L	Material	Availability	Supply
1062	106200B	30 m	BluLub	Stock item	30 m coils





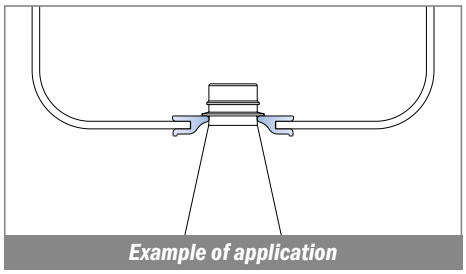



1072


Guida collo / *Neck guide / Nackenführung*

Delivery: Easy Standard | Fit on 1.8 - 2 mm

Part	Article-Nr.	L	Material	Availability	Supply
1072	107200B	30 m	BluLub	Stock item	30 m coils





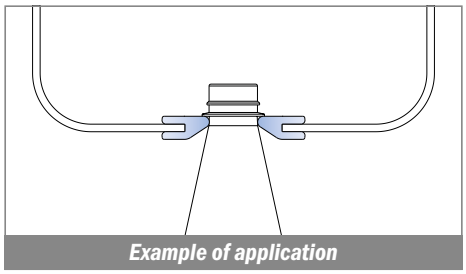



Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo.
BluLub *new material with reduced coefficient of friction and higher wear resistence.*
BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176 °F (-40 to +80 °C)


1073

Guida collo / *Neck guide / Nackenführung*

Delivery:	Easy	Standard	Fit on 1.8 - 2 mm	Part	Article-Nr.	L	Material	Availability	Supply
				1073	107300B	30 m	BluLub	Stock item	30 m coils





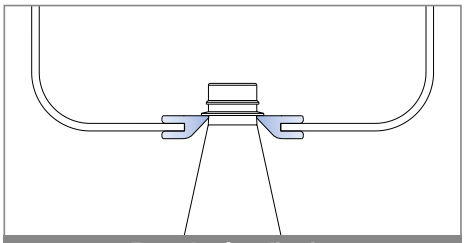


Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)

163


Profilo 25 mm per guida in alluminio / *Profile 25 mm for aluminum guide / C-Profil f. Aluminiumprofil*

Coils available





Part	Article-Nr.	A	L	Colour	Availability	Supply
163	16303C	25,4	3 m	white	Stock item	3 m bars
163	16303	25,4	6 m	white	On request	6 m bars
163	16313C	31,75	3 m	white	Stock item	3 m bars
163	16313	31,75	6 m	white	On request	6 m bars
163	16323C	35,0	3 m	white	Stock item	3 m bars
163	16323	35,0	6 m	white	On request	6 m bars
163	16324C	38,1	3 m	white	Stock item	3 m bars
163	16324	38,1	6 m	white	On request	6 m bars

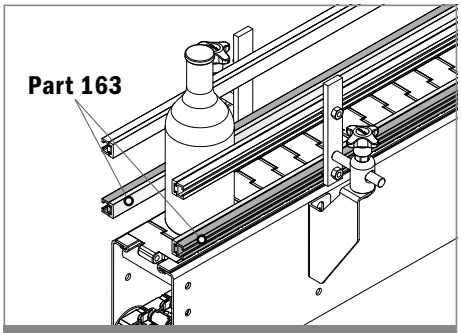



Example of application

160


Profilo 20 mm per guida in alluminio / *Profile 20 mm for aluminum guide / C-Profil f. Aluminiumprofil*

Coils available





Part	Article-Nr.	L	Colour	Availability	Supply
160	16003C	3 m	white	Stock item	3 m bars
160	16003	6 m	white	On request	6 m bars

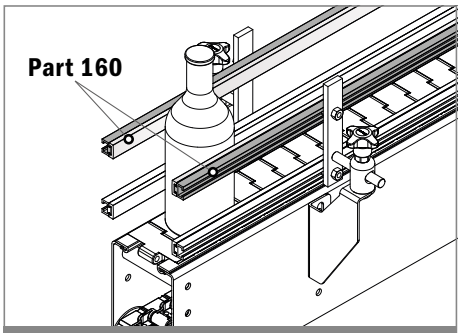



Example of application

161


Profilo 20 mm per guida in alluminio / *Profile 20 mm for aluminum guide / C-Profil f. Aluminiumprofil*

Delivery: Easy Standard Coils available





Part	Article-Nr.	L	Colour	Availability	Supply
161	16103C	3 m	white	Stock item	3 m bars
161	16103	6 m	white	On request	6 m bars

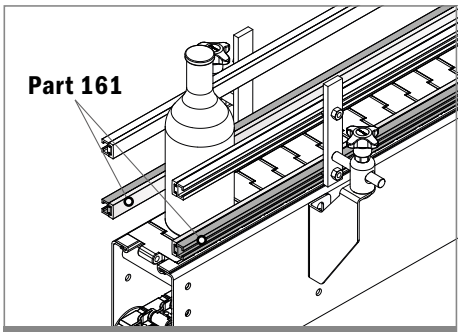

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


162


Profilo tondo per guida in alluminio / *Round profile for aluminum guide / Pilzprofil f. Aluminiumprofil*

Coils available

Part	Article-Nr.	L	Colour	Availability	Supply
162	16202C	3 m	green	Stock item	3 m bars
162	16202	6 m	green	On request	6 m bars
162	16203C	3 m	white	Stock item	3 m bars
162	16203	6 m	white	On request	6 m bars





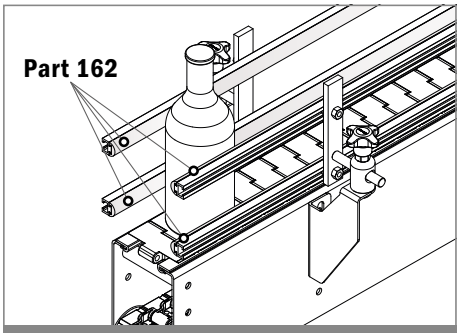


Example of application


164


Guida in alluminio / *Aluminum guide / Aluminiumprofil*

Delivery: Easy Standard

Part	Article-Nr.	L	Material	Availability	Supply
164	16401C	3 m	Aluminium	Stock item	3 m bars
164	16401	6 m	Aluminium	On request	6 m bars





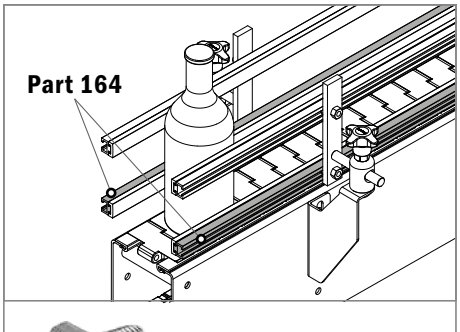



Fixing screw: M8 hex.head
or **PART 362** Pag 394


Example of application


165

Guida in alluminio / *Aluminum guide / Aluminiumprofil*

Part	Article-Nr.	L	Material	Availability	Supply
165	16501C	3 m	Aluminium	Stock item	3 m bars
165	16501	6 m	Aluminium	On request	6 m bars





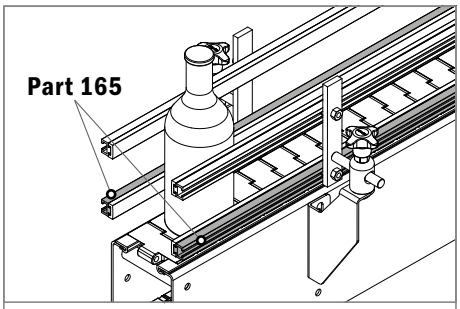


Fixing screw: M8 hex.head
or **PART 362** Pag 394


Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


154 Guida laterale / *Side guide rail / Seitenführungen*

Delivery: Easy | Standard

Part	Article-Nr.	L	Colour	Availability	Supply
154	15401C	3 m	white	Stock item	3 m bars
154	15401	6 m	white	On request	6 m bars
154	15401BC	3 m	BluLub	Stock item	3 m bars
154	15401B	6 m	BluLub	On request	6 m bars






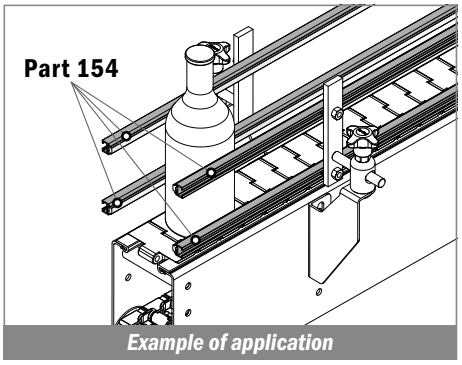



Example of application

155 Guida laterale / *Side guide rail / Seitenführungen*

Part	Article-Nr.	L	Colour	Availability	Supply
155	15501C	3 m	green	Stock item	3 m bars
155	15501	6 m	green	On request	6 m bars





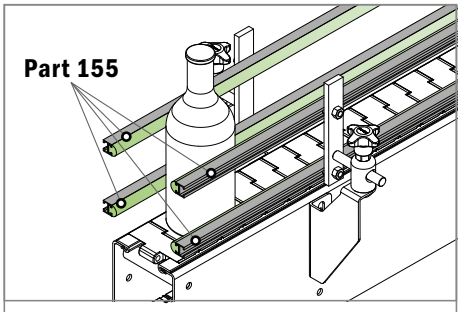



Fixing screw: M8 hex.head
or **PART 362** Pag 394


Example of application


134 Guida standard / *Standard guide rail / Seitenführung*

Delivery: Easy | Standard

Part	Article-Nr.	L	Colour	Availability	Supply
134	13401C	3 m	green	Stock item	3 m bars
134	13401	6 m	green	On request	6 m bars





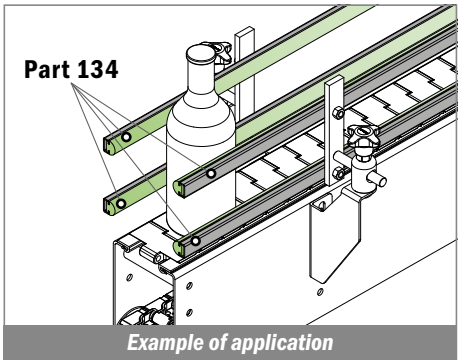

Example of application

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1041


Profilo "C" / *C-Profile / C-Profil*


Fit on 5 x 25 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1041	104103C	3 m	white	On request	3 m bars
1041	104103	6 m	white	On request	6 m bars



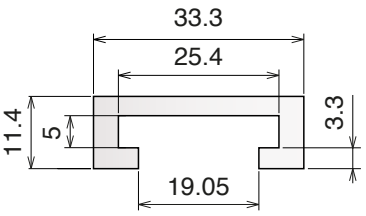

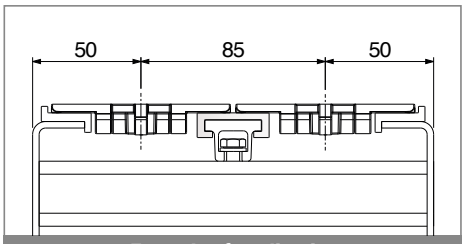

Example of application


1042


Profilo "C" / *C-Profile / C-Profil*


Fit on 6 x 50 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1042	104203C	3 m	white	On request	3 m bars
1042	104203	6 m	white	On request	6 m bars



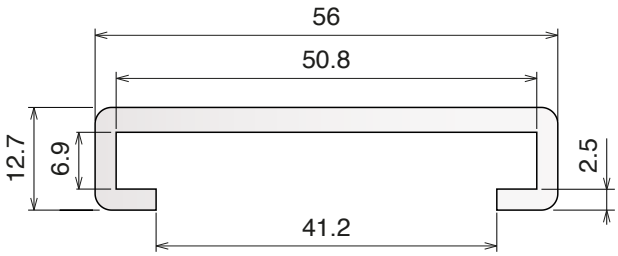

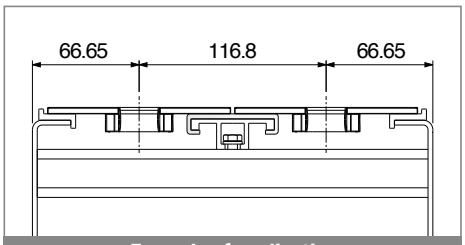

Example of application


1043


Profilo "C" / *C-Profile / C-Profil*


Fit on 6 x 50 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1043	104303C	3 m	white	On request	3 m bars
1043	104303	6 m	white	On request	6 m bars

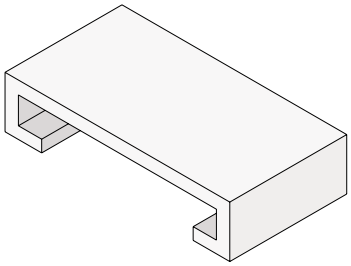

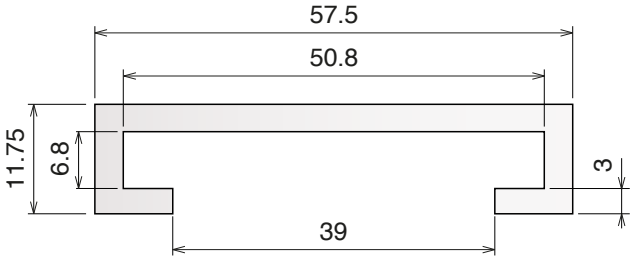

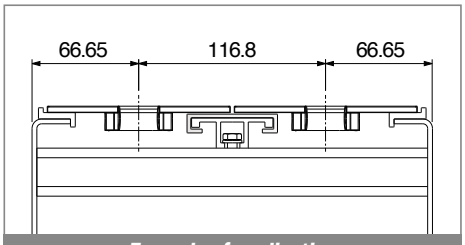

Example of application

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1044


Profilo "C" / *C-Profile / C-Profil*


Fit on 12.7 x 38.1 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1044	104403C	3 m	white	On request	3 m bars
1044	104403	6 m	white	On request	6 m bars



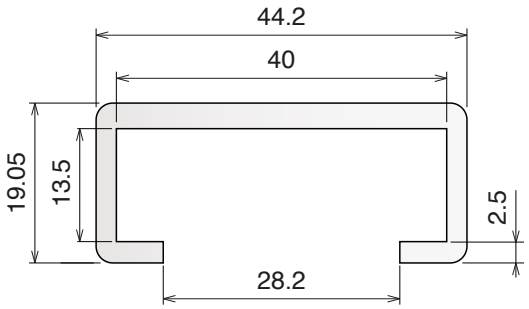

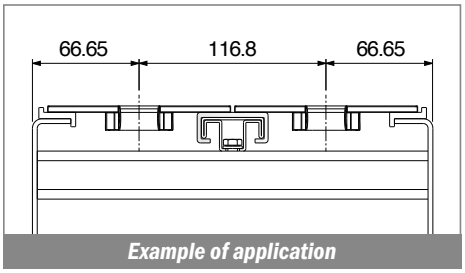

Example of application


1045


Profilo "C" / *C-Profile / C-Profil*


Fit on 12.7 x 50.8 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1045	104503C	3 m	white	On request	3 m bars
1045	104503	6 m	white	On request	6 m bars



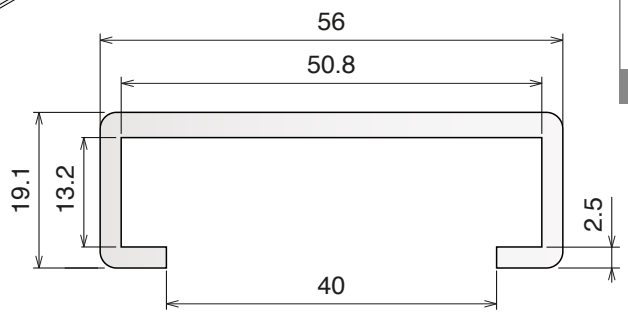

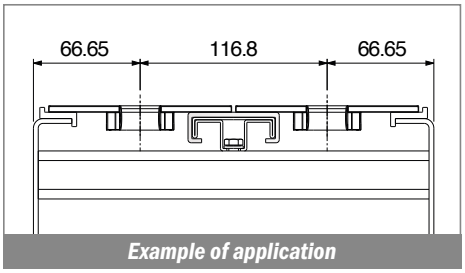

Example of application


1053


Copri profilo / *Bar cover / Abdeckprofil*


Fit on 6.35 x 38.1 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1053	105303C	3 m	white	On request	3 m bars
1053	105303	6 m	white	On request	6 m bars



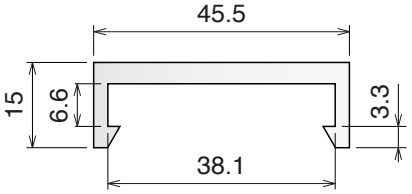

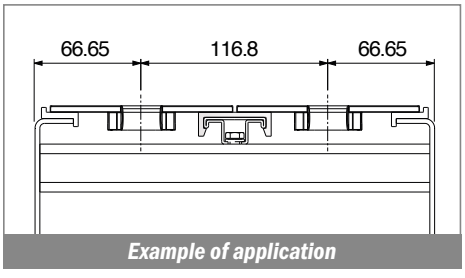

Example of application

Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1054


Copri profilo / *Bar cover / Abdeckprofil*


Fit on 6.35 x 38.1 mm

North America STANDARD

Part	Article-Nr.	L	Colour	Availability	Supply
1054	105403C	3 m	white	On request	3 m bars
1054	105403	6 m	white	On request	6 m bars



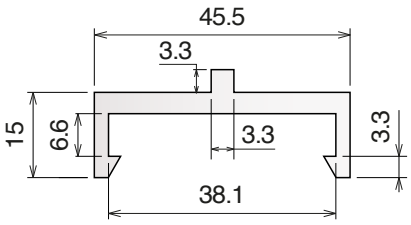

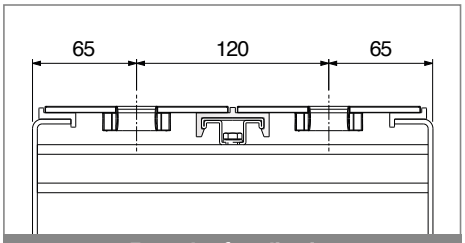


Example of application


137

Profilo "C" / *C-Profile / C-Profil*


Delivery: Easy | Standard

Part	Article-Nr.	L	A	B	Colour	Availability	Supply
137	13701C	3 m	8,5	14	green	Stock item	3 m bars
137	13701	6 m	8,5	14	green	On request	6 m bars
137	13701BC	3 m	8,5	14	BluLub	Stock item	3 m bars
137	13701B	6 m	8,5	14	BluLub	On request	6 m bars
137	13702C	3 m	8,5	14	black	Stock item	3 m bars
137	13702	6 m	8,5	14	black	On request	6 m bars
137	13711C	3 m	10,5	16	green	Stock item	3 m bars
137	13711	6 m	10,5	16	green	On request	6 m bars
137	13711BC	3 m	10,5	16	BluLub	Stock item	3 m bars
137	13711B	6 m	10,5	16	BluLub	On request	6 m bars




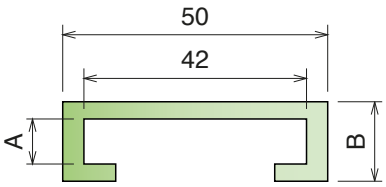


USE WITH STEEL
40 x 8 mm or 40 x 10 mm

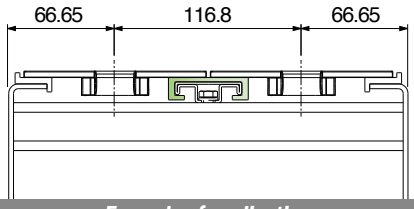


Example of application



Part	Article-Nr.	L	Colour	Availability	Supply
137	13720	6 m	white	On request	6 m bars

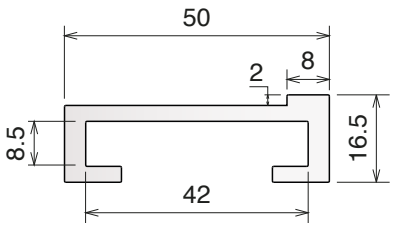

USE WITH STEEL
40 x 8 mm

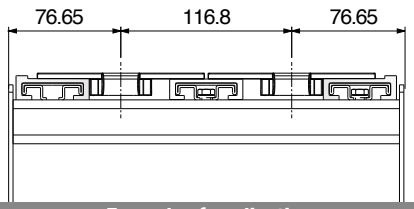


Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: 1.1x10^{-4} °F^{-1} (2x10^{-4} °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


117 Profilo Omega / *M-Profile / M-Profil*

Delivery: Easy Standard

Part	Article-Nr.	L	A	Material	Availability	Supply
117	11701C	3 m	8	AISI 304	Stock item	3 m bars
117	11701	6 m	8	AISI 304	On request	6 m bars
117	11702C	3 m	10	AISI 304	Stock item	3 m bars
117	11702	6 m	10	AISI 304	On request	6 m bars
117	11703C	3 m	6	AISI 304	Stock item	3 m bars
117	11703	6 m	6	AISI 304	On request	6 m bars



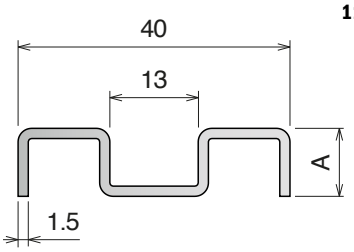

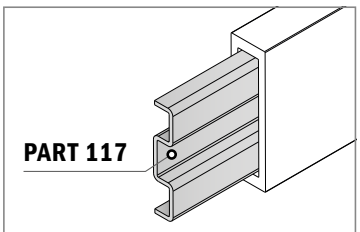



Example of application

1055 Guida in acciaio inox / *Stainless steel guide / Edelstahlprofil*


Delivery: Easy Standard

Part	Article-Nr.	L	Material	Availability	Supply
1055	105501C	3 m	AISI 304	Stock item	3 m bars
1055	105501	6 m	AISI 304	On request	6 m bars



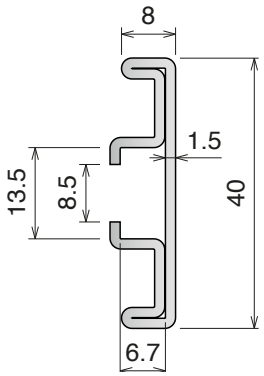


40x8
Used with part:
13701C / 13701BC Pag 333
18914C Pag 339
18301C Pag 343





Example of application

159 Guida in alluminio / *Aluminum guide / Aluminiumprofil*

Part	Article-Nr.	L	Material	Availability	Supply
159	15901C	3 m	Aluminium	Stock item	3 m bars
159	15901	6 m	Aluminium	On request	6 m bars



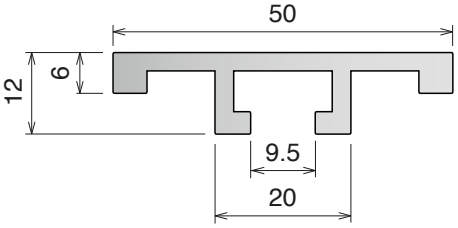

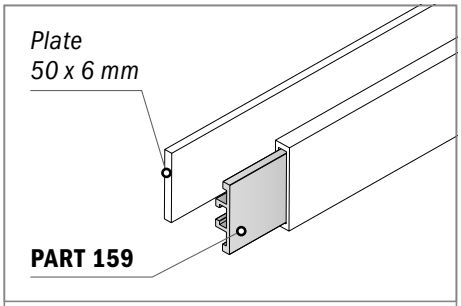



Fixing screw: M8 hex.head
or **PART 362** Pag 394


Example of application


135


Guida laterale H.78 mm / *Side guide H.78 mm* / *Seitenführung H.78 mm*

Delivery: **Easy** **Standard** For plate: 60 x 6 mm

Part	Article-Nr.	L	Colour	Availability	Supply
135	13501C	3 m	black	Stock item	3 m bars
135	13501	6 m	black	On request	6 m bars
135	13502C	3 m	blu	Stock item	3 m bars
135	13502	6 m	blu	On request	6 m bars

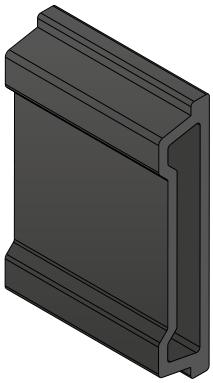

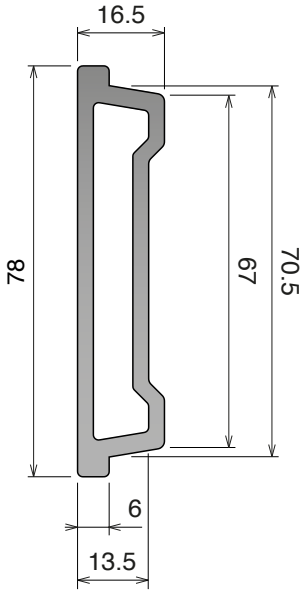

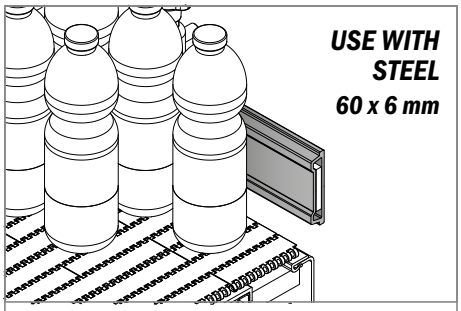



Used with: **PART 394** Pag 376
or **PART 331** Pag 377


Example of application


136


Guida laterale H.87 mm / *Side guide H.87 mm* / *Seitenführung H.87 mm*

Delivery: **Easy** **Standard** For plate: 60 x 6 mm

Part	Article-Nr.	L	Colour	Availability	Supply
136	13601C	3 m	black	Stock item	3 m bars
136	13601	6 m	black	On request	6 m bars
136	13602C	3 m	blu	Stock item	3 m bars
136	13602	6 m	blu	On request	6 m bars

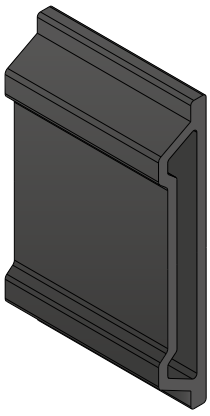

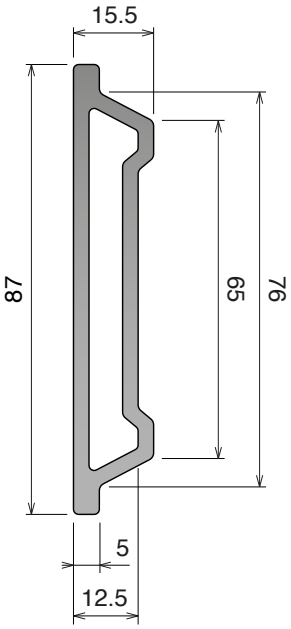

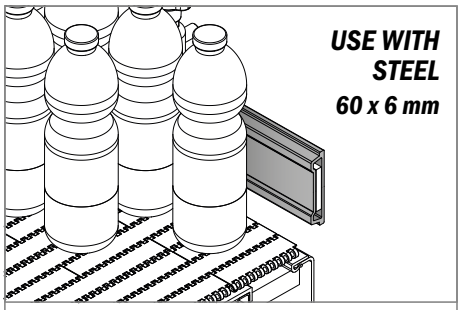



Used with: **PART 394** Pag 376
or **PART 345** Pag 378

Example of application


Material:
Polyethylene UHMW-PE with molecular density 5,600,000 g/mol
Linear expansion coefficient: $1.1x10^{-4}$ °F^{-1} ($2x10^{-4}$ °C^{-1})
Operating temperature: -40 to 176°F (-40 to +80°C)


1063


Guida laterale / *Side guide rail / Seitenführung*

Delivery: Easy Standard — For plate: 30 x 4 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1063	106301C	3 m	black	Stock item	3 m bars
1063	106302C	3 m	green	Stock item	3 m bars

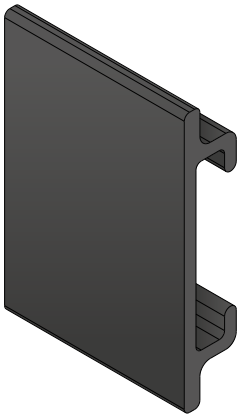

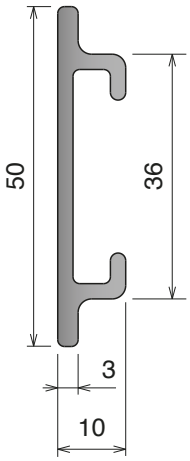

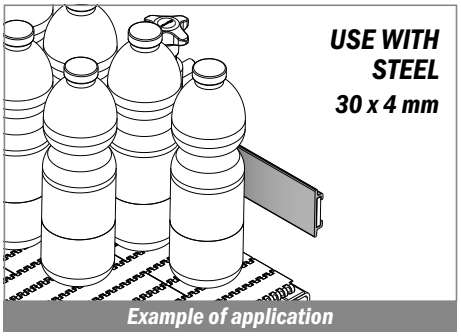



1064


Guida laterale / *Side guide rail / Seitenführung*

Delivery: Easy Standard — For plate: 55 x 4 mm

Part	Article-Nr.	L	Colour	Availability	Supply
1064	106401C	3 m	black	Stock item	3 m bars

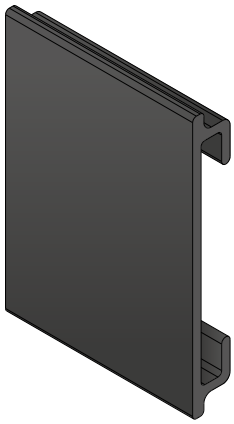

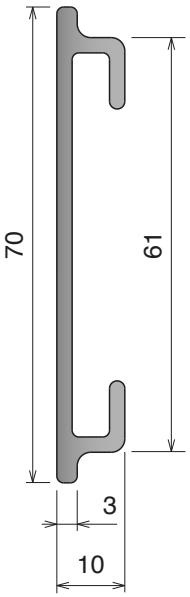

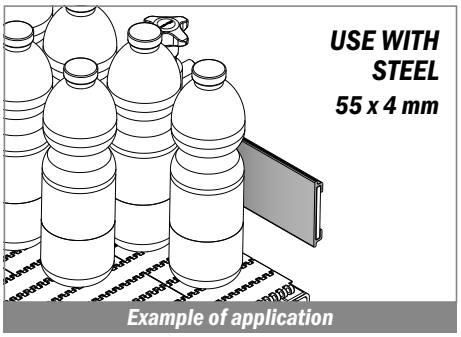



Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. ***BluLub®*** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176 °F (-40 to +80 °C)*


158 Guida laterale / *Side guide rail / Seitenführung*

Delivery: Easy Standard

Part	Article-Nr.	L	Material	Availability	Supply
158	15800C	3 m	grey	Stock item	3 m bars
158	15800BC	3 m	BluLub	Stock item	3 m bars

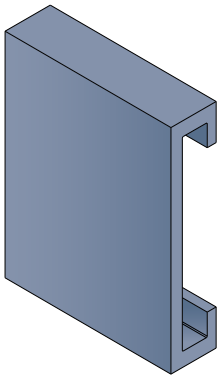

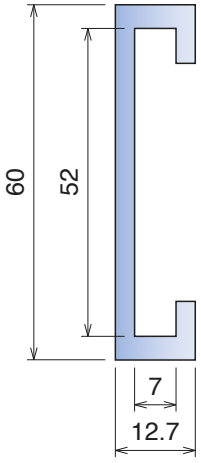


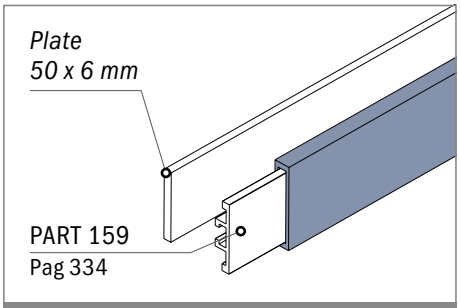


Example of application


Guida laterale / *Side guide rail / Seitenführung*

Part	Article-Nr.	L	A	Material	Availability	Supply	Design
158	15801C	3 m	90	grey	On request	3 m bars	A
158	15801BC	3 m	90	BluLub	Stock item	3 m bars	A
158	15802C	3 m	100	grey	On request	3 m bars	A
158	15802BC	3 m	100	BluLub	Stock item	3 m bars	A
158	15803C	3 m	120	grey	On request	3 m bars	B
158	15803BC	3 m	120	BluLub	Stock item	3 m bars	B

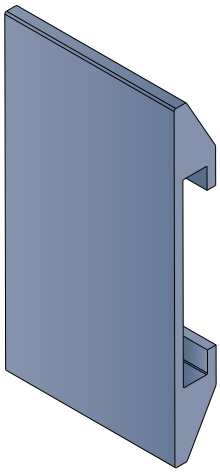


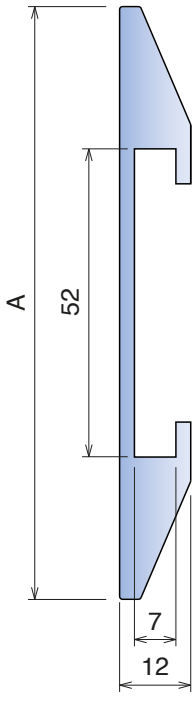

DESIGN **A**

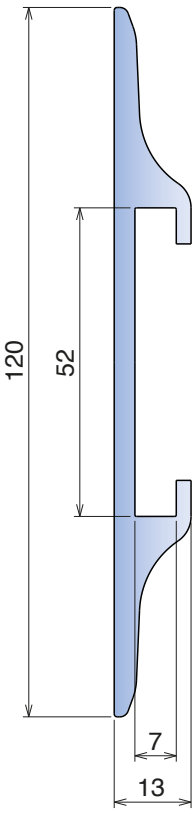

DESIGN **B**

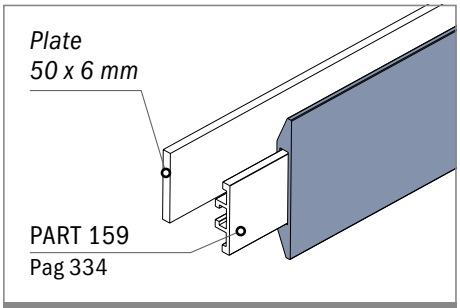


Example of application


Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. ***BluLub®*** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*


182

Guida laterale / *Side guide rail / Seitenführung*

Part	Article-Nr.	L	For plate	Material	Availability	Supply
182	18214C	3 m	40 x 8 mm	grey	On request	3 m bars
182	18210BC	3 m	40 x 8 mm	BluLub	On request	3 m bars
182	18204C	3 m	50 x 6 mm	grey	Stock item	3 m bars
182	18200BC	3 m	50 x 6 mm	BluLub	Stock item	3 m bars

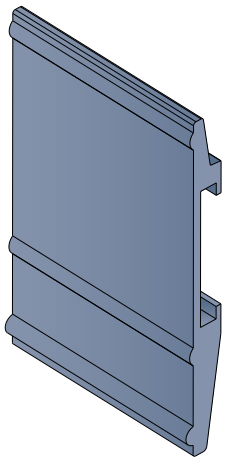

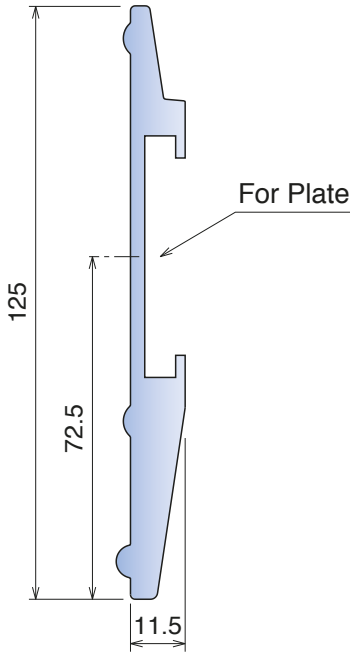

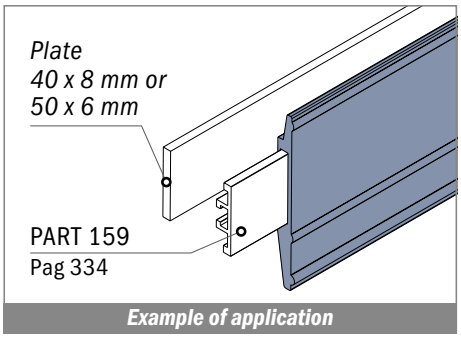


Example of application


1065


Guida laterale / *Side guide rail / Seitenführung*

For plate: 50 x 6 mm

Part	Article-Nr.	L	Material	Availability	Supply
1065	106504C	3 m	grey	On request	3 m bars
1065	106500BC	3 m	BluLub	On request	3 m bars

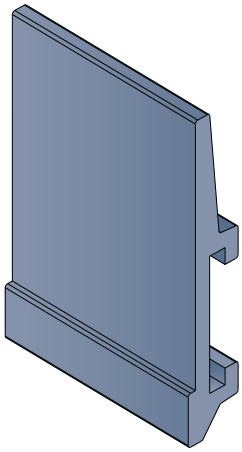

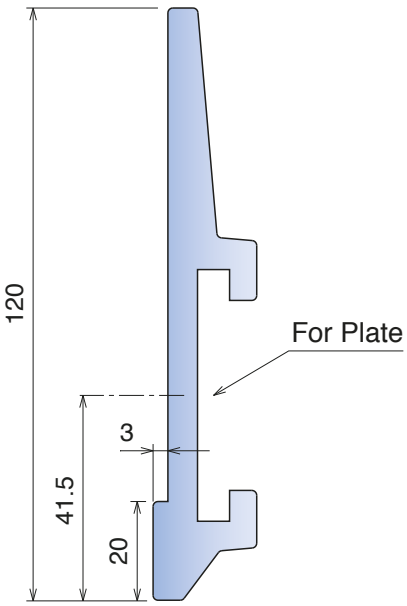

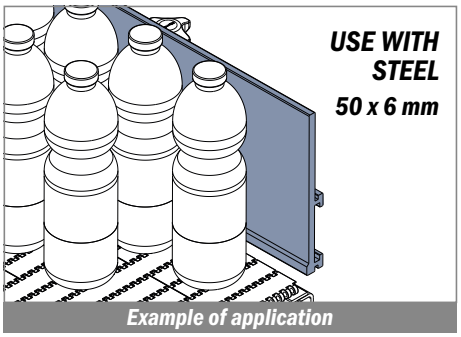

Example of application





Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. ***BluLub*** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176 °F (-40 to +80 °C)*


189 Guida laterale / *Side guide rail / Seitenführung*

Delivery: Easy | Standard

Part	Article-Nr.	L	For plate	Material	Availability	Supply
189	18914C	3 m	40 x 8 mm	grey	On request	3 m bars
189	18910BC	3 m	40 x 8 mm	BluLub	Stock item	3 m bars
189	18904C	3 m	50 x 6 mm	grey	On request	3 m bars
189	18900BC	3 m	50 x 6 mm	BluLub	Stock item	3 m bars

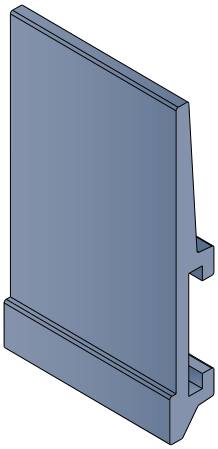

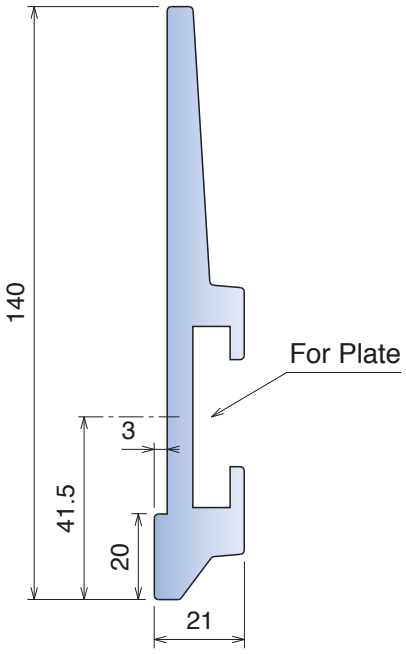


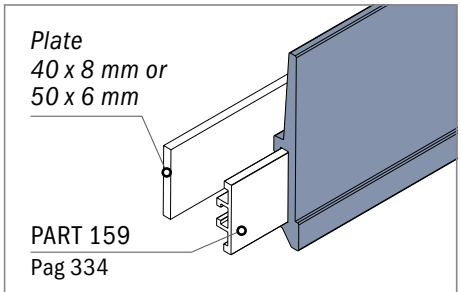



Example of application

Guida laterale / *Side guide rail / Seitenführung*

Part	Article-Nr.	L	A	For plate	Material	Availability	Supply
189	18944C	3 m	40	60 x 5 mm	grey	Stock item	3 m bars
189	18940BC	3 m	40	60 x 5 mm	BluLub	Stock item	3 m bars
189	18924C	3 m	20	60 x 6 mm	grey	Stock item	3 m bars
189	18920BC	3 m	20	60 x 6 mm	BluLub	Stock item	3 m bars
189	18934C	3 m	40	60 x 6 mm	grey	Stock item	3 m bars
189	18930BC	3 m	40	60 x 6 mm	BluLub	Stock item	3 m bars

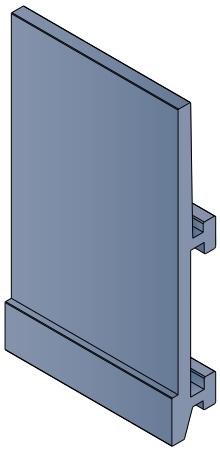

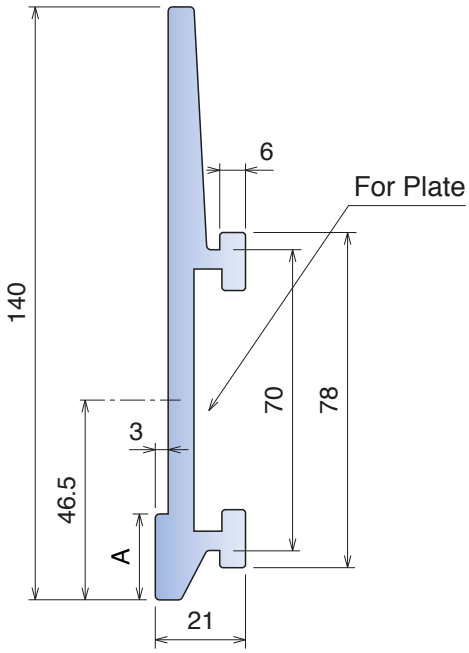

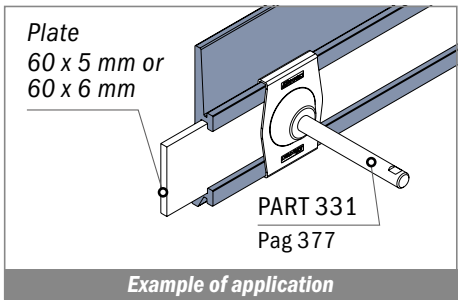

Example of application


Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. ***BluLub®*** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*


193


Guida laterale / *Side guide rail / Seitenführung*

Delivery: Easy Standard — For plate: 60 x 6 mm

Part	Article-Nr.	L	Material	Availability	Supply
193	19324C	3 m	grey	Stock item	3 m bars
193	19320BC	3 m	BluLub	Stock item	3 m bars

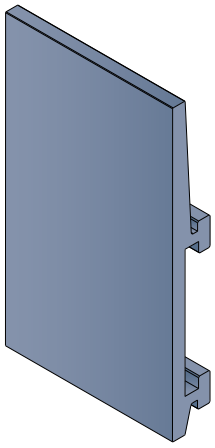

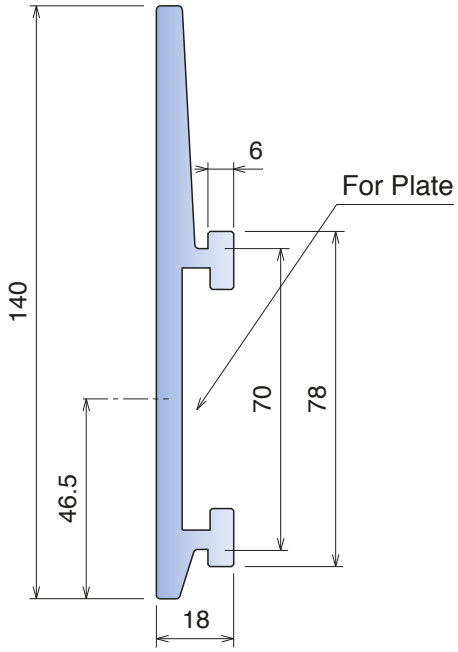

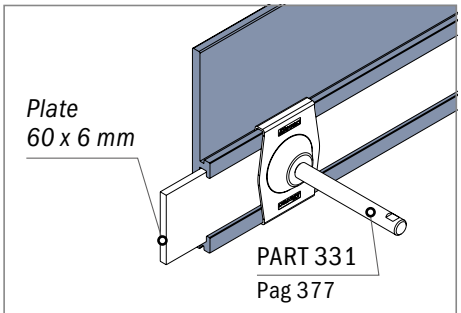


Example of application


187


Guida laterale / *Side guide rail / Seitenführung*

For plate: 60 x 6 mm

Part	Article-Nr.	L	A	Material	Availability	Supply
187	18724C	3 m	12	grey	Stock item	3 m bars
187	18720BC	3 m	12	BluLub	Stock item	3 m bars
187	18734C	3 m	20	grey	Stock item	3 m bars
187	18730BC	3 m	20	BluLub	Stock item	3 m bars
187	18744C	3 m	40	grey	Stock item	3 m bars
187	18740BC	3 m	40	BluLub	Stock item	3 m bars

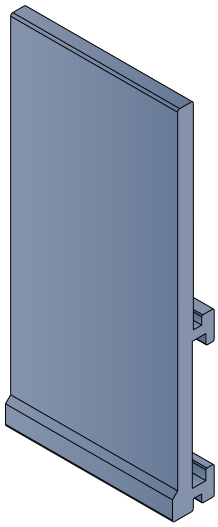

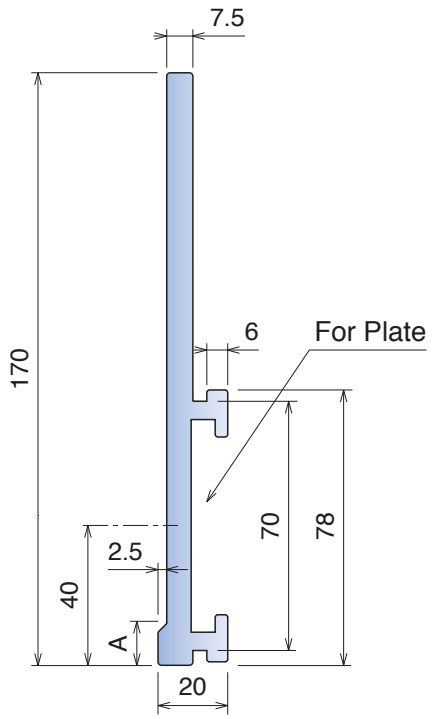

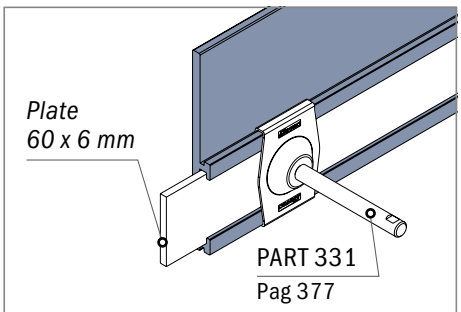

Example of application


Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. **BluLub®** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*


1056


Guida laterale / *Side guide rail / Seitenführung*

For plate: 60 x 6 mm

Part	Article-Nr.	L	A	Material	Availability	Supply
1056	105604C	3 m	10	grey	Stock item	3 m bars
1056	105600BC	3 m	10	BluLub	Stock item	3 m bars
1056	105634C	3 m	40	grey	Stock item	3 m bars
1056	105630BC	3 m	40	BluLub	Stock item	3 m bars

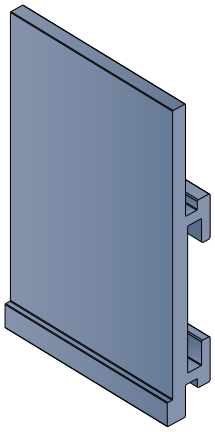

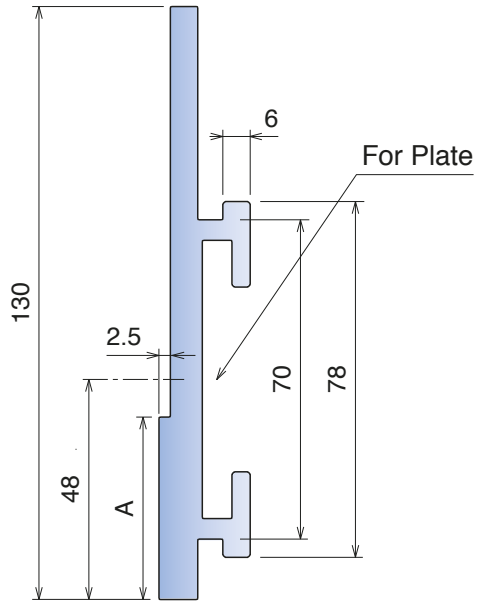

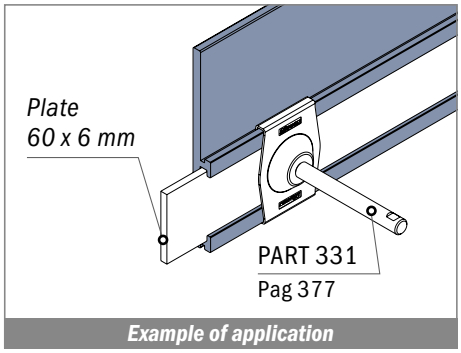


Example of application


1057


Guida laterale / *Side guide rail / Seitenführung*

Delivery: Easy | Standard — **For plate: 60 x 6 mm**

Part	Article-Nr.	L	Material	Availability	Supply
1057	105704C	3 m	grey	Stock item	3 m bars
1057	105700BC	3 m	BluLub	Stock item	3 m bars



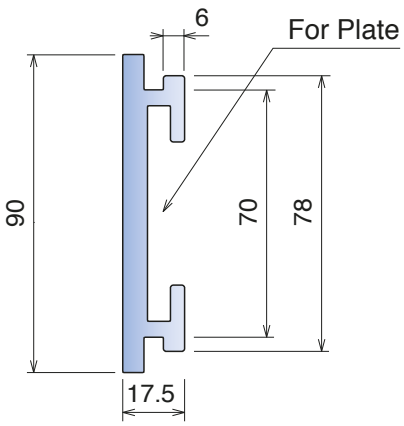

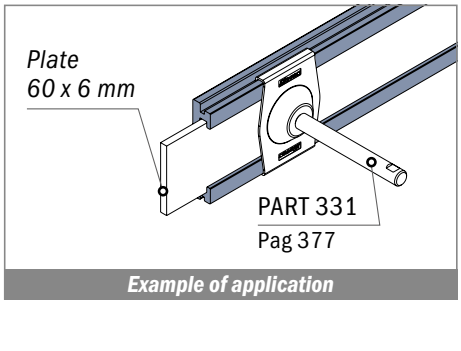

Example of application


Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. ***BluLub®*** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*


186


Guida laterale / *Side guide rail / Seitenführung*

For plate: 50 x 6 mm

Part	Article-Nr.	L	Material	Availability	Supply
186	18604C	3 m	grey	On request	3 m bars
186	18600BC	3 m	BluLub	On request	3 m bars

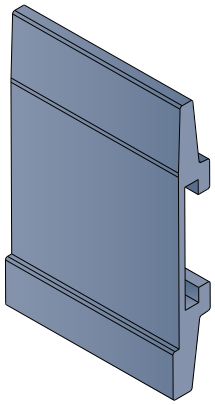

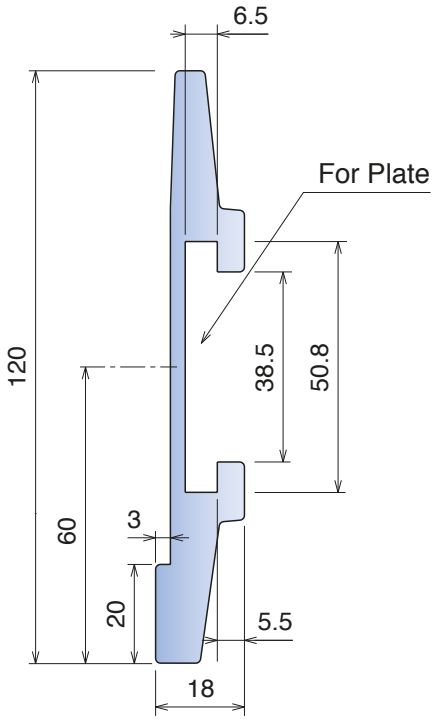

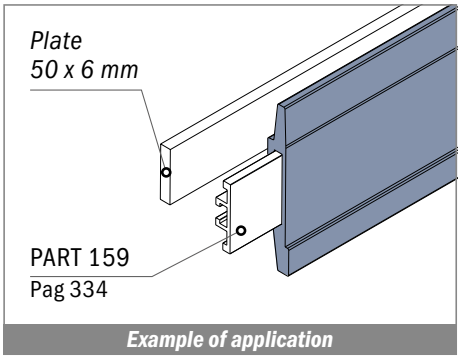


Example of application


1061


Guida laterale / *Side guide rail / Seitenführung*

For plate: 60 x 6 mm

Part	Article-Nr.	L	Material	Availability	Supply
1061	106104C	3 m	grey	On request	3 m bars
1061	106104BC	3 m	BluLub	On request	3 m bars

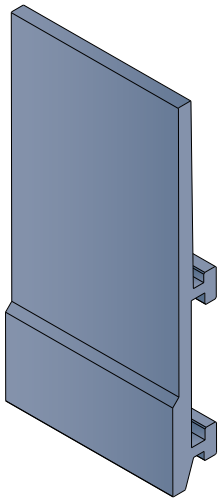

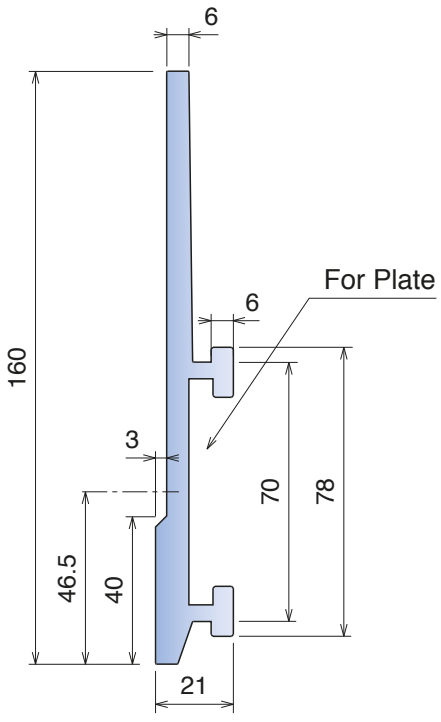

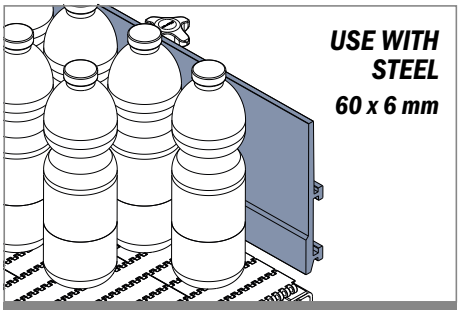

Example of application


Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo. ***BluLub®*** *new material with reduced coefficient of friction and higher wear resistence. BluLub complies with the code of Federal Regulations of FDA. Linear expansion coefficient: 1.1x10⁻⁴ °F⁻¹ (2x10⁻⁴ °C⁻¹) Operating temperature: -40 to 176°F (-40 to +80°C)*


183


Guida laterale / *Side guide rail / Seitenführung*

Delivery: Easy Standard — For plate: 40 x 8 mm

Part	Article-Nr.	L	Colour	Availability	Supply
183	18301C	3 m	black	Stock item	3 m bars
183	18301BC	3 m	BluLub	Stock item	3 m bars

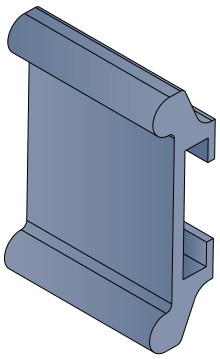

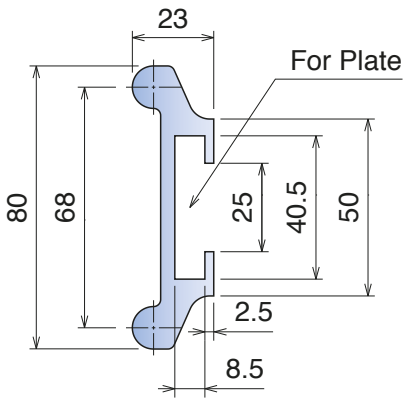

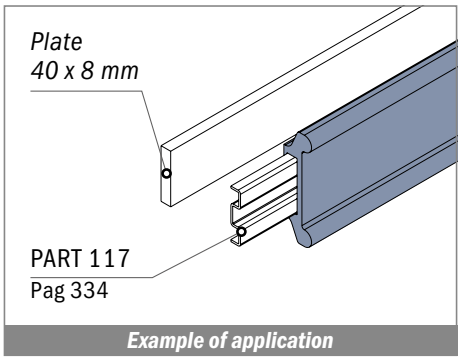


Example of application


166


Profilo per tondini / *Round profile for steel rods / Clip-on Profil für Rundmaterial*

Delivery: Easy Standard

Part	Article-Nr.	A	B	C	Colour	Availability	Supply
166	16601	8	12	0,5	white	Stock item	30 m coils
166	16602	10	14	0,5	white	Stock item	30 m coils
166	16603	12	16	1	white	Stock item	30 m coils
166	16604	16	20	1,5	white	Stock item	30 m coils





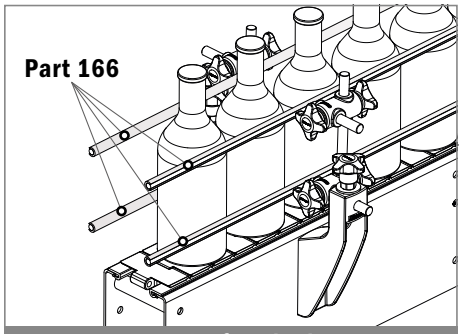


Example of application


1039


Profilo per mezzitondi / *Half round profile for steel rods / Halbmond Profil*

Delivery: Easy Standard

Part	Article-Nr.	L	A	B	Colour	Availability	Supply
1039	103923C	3 m	16	20	white	Stock item	3 m bars
1039	103923	6 m	16	20	white	On request	6 m bars
1039	103923-30	30 m	16	20	white	On request	30 m coils
1039	103923-60	60 m	16	20	white	On request	60 m coils





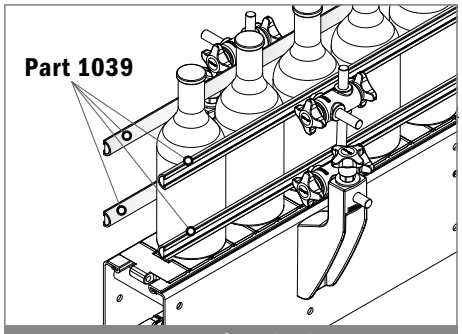

Example of application


Materiale / *Material / Materialien:*
Poliammide rinforzato / *Polyamide reinforced / Verstärktes Polyamid*


113 Pattino guida catena, centrale / *Central wear strip shoe / Zentraler Einlaufschuh*

Delivery: Easy | Standard — Used with PART 112 pag. 304

Part	Article-Nr.	Colour	Availability
113	11301	black	On request



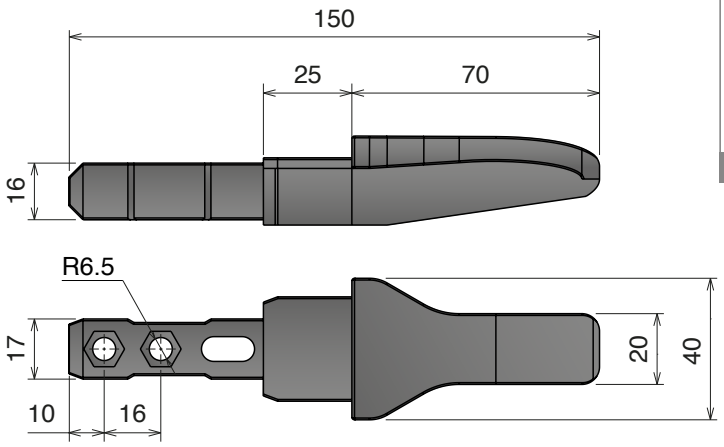


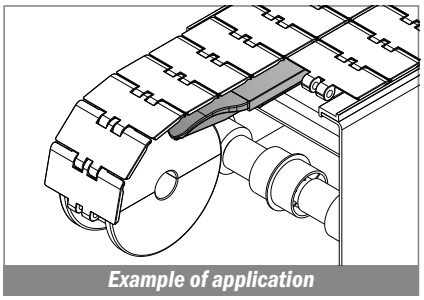

Example of application

CON NERVATURA / WITH NOSE / MIT NASE

Part	Article-Nr.	Colour	Availability
113	11302	black	On request



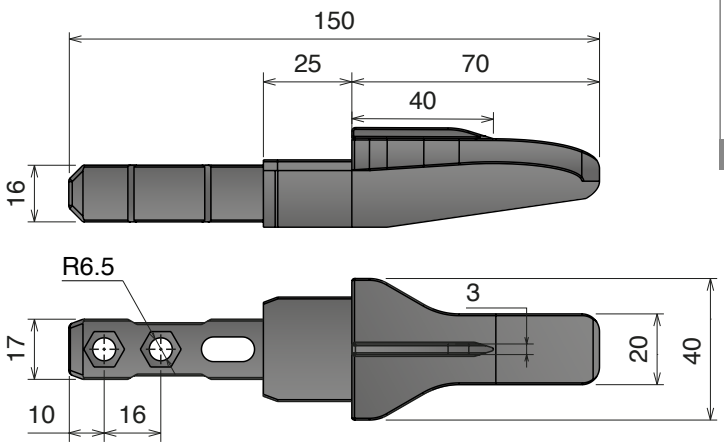

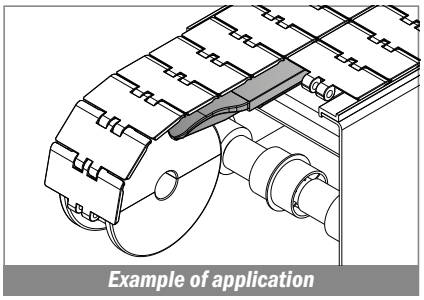

Example of application


114 Blocchetto fissaggio / *Fixing clamp / Fixierblock*

Delivery: Easy | Standard — Used with PART 112 pag. 304

Part	Article-Nr.	A	B	C	Colour	Availability
114	11401	10	6,2	4,5	black	On request
114	11402	13	8,2	6	black	On request



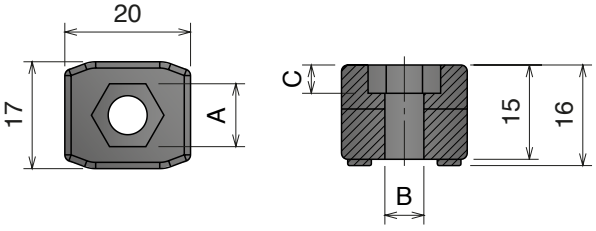

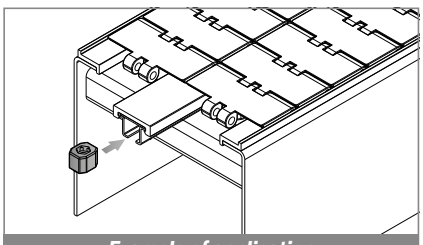

Example of application


116 Pattino guida catena, laterale / *Side transfer guide shoe* / *Seitlicher Tranferschuh*

Delivery: Easy | Standard — Used with PART 112 pag. 304

Part	Article-Nr.	Colour	Availability
116	11601	black	On request


LEFT VERSION

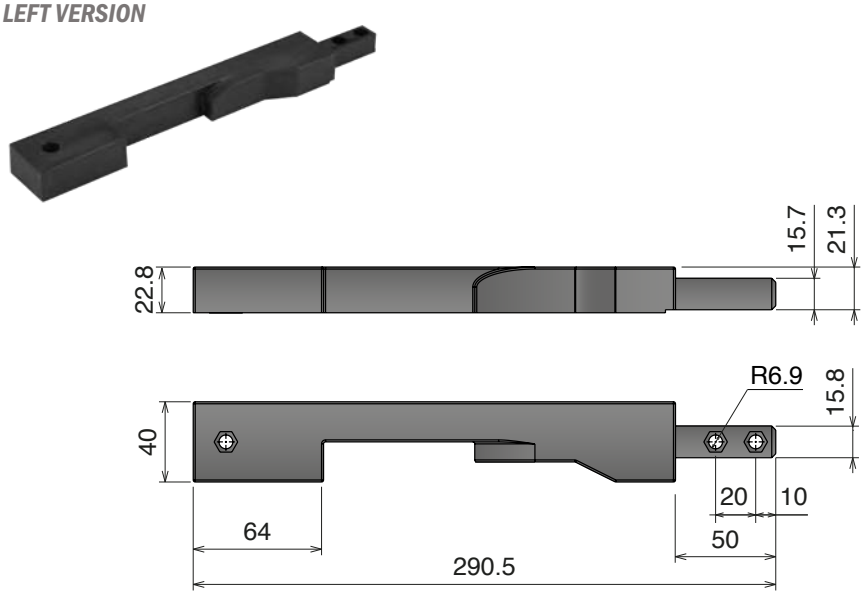


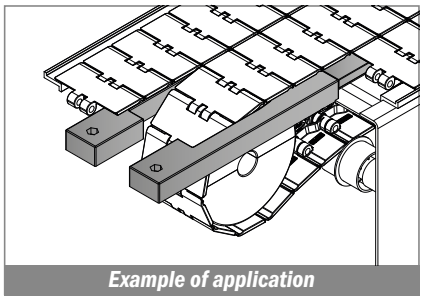
Example of application

RIGHT VERSION

Part	Article-Nr.	Colour	Availability
116	11602	black	On request

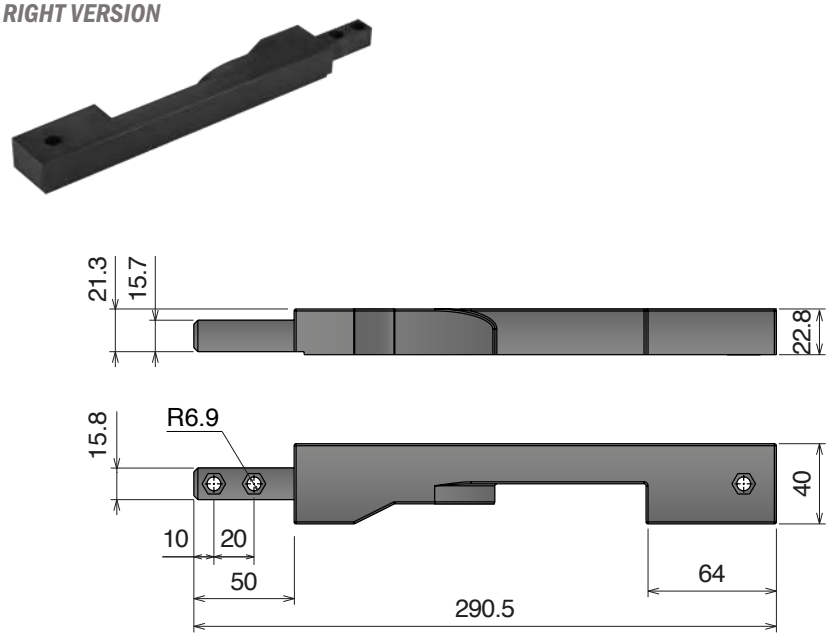

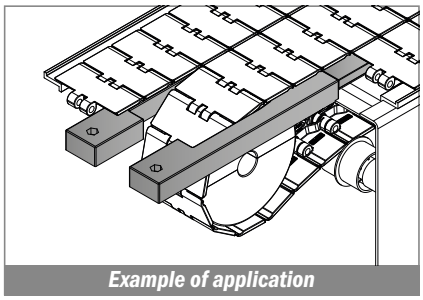

Example of application


115 Blocchetto giunzione / *Connecting element* / *Verbindungselement*

Delivery: Easy | Standard — Used with PART 112 pag. 304

Part	Article-Nr.	A	B	C	Colour	Availability
115	11501	10	6,2	4,5	black	On request
115	11502	13	8,2	6	black	On request



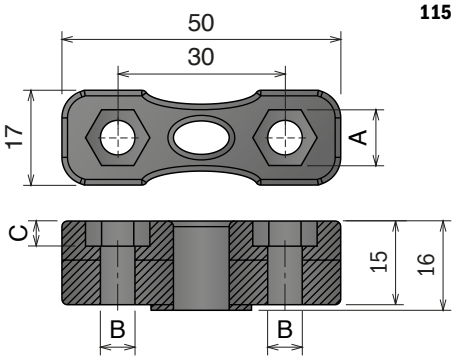

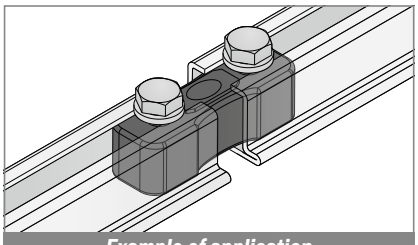
Example of application