
520

Pitch 12,7 mm
H= 8,7 mm

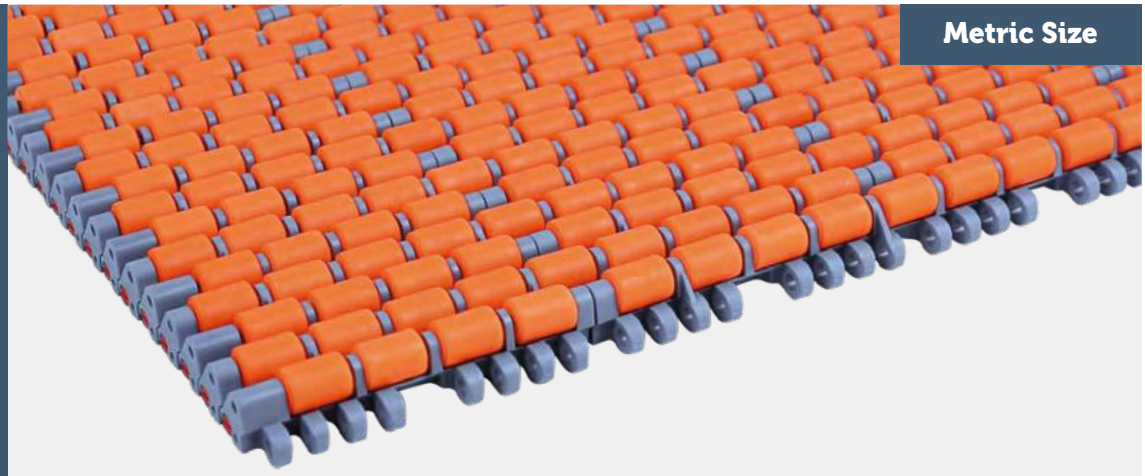

Metric Size

520 FT
520 HD FT
520 FTT
520 FG
520 GT
520 LBP
520 PRO LBP
520 M

Movex®

520 FTT


Tappeto Modulare 520 FTT, H=8,7 M=85
Modular Belt Series 520 FTT, H=8,7 M=85 / Modulare Mattenkette 520 FTT, H=8,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)			
5206	01	0170	CN
Series	*Material	Width	Version

pg. 269-270 | pg. 516->524 | pg. 483

Backflex radius min.: 10 mm

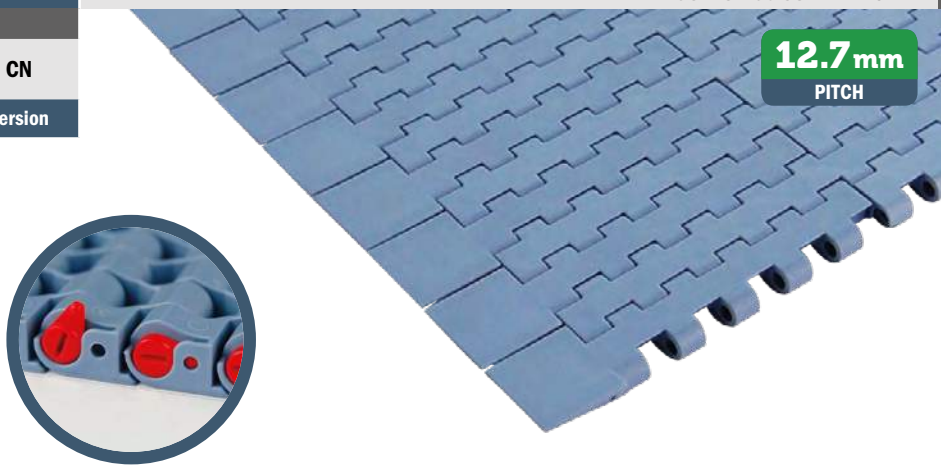

*Material

LFA - Code 01
Low friction Acetal

Easy Delivery

Max w. load:	21500 N/m
Weight:	7,8 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

PP - Code 02
Polypropylene

Max w. load:	13000 N/m
Weight:	7,5 kg/m²
Temp. range dry:	4÷80 °C
Temp. range wet:	4÷65 °C
Pin material:	PP blu

MX - Code 03
Performance PBT

Max w. load:	17500 N/m
Weight:	7,5 kg/m²
Temp. range dry:	-40÷120 °C
Temp. range wet:	40÷60 °C
Pin material:	POM grey

DKM - Code 16
Aramide Reinforced Acetal

Max w. load:	21500 N/m
Weight:	7,8 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white


MWX - Code 17
Polyamide Composite

Max w. load:	21500 N/m
Weight:	7,8 kg/m²
Temp. range dry:	-40÷104 °C
Temp. range wet:	NR
Pin material:	PBT white


MPX - Code 25
Lubricated Acetal

Max w. load:	21500 N/m
Weight:	7,8 kg/m²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white


Version C

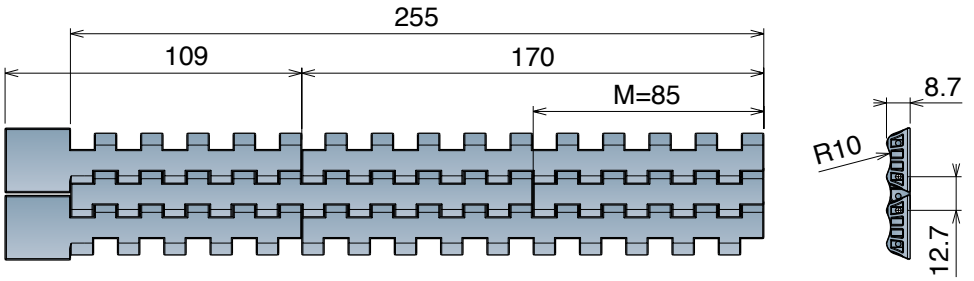

Version CN - Near

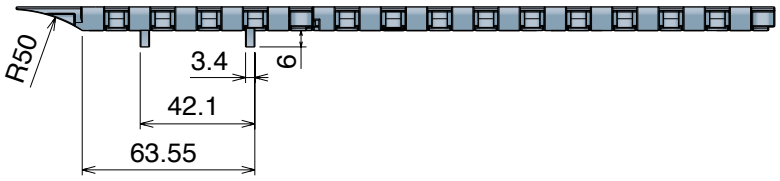

Version CO - Opposite

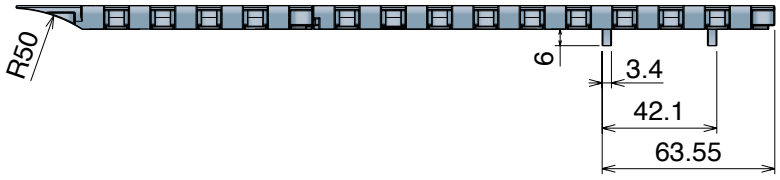

Version C

Series	Material	Width	Version
5206	*	0085	C

Version CN - Near

Series	Material	Width	Version
5206	*	0170	CN
5206	*	0255	CN

Version CO - Opposite

Series	Material	Width	Version
5206	*	0170	CO
5206	*	0255	CO

On request available with bigger/different width